		No.:
		Date: 13-NOV-2020

Customer :

TECHNICAL PROPOSAL

Three-phase induction motor - Squirrel cage rotor

Product line : W01 - TEFC - NEMA Premium Efficiency

Catalog Number :
List Price : $

Notes:

Performed by:	Checked:

		No.:
		Date: 13-NOV-2020

DATA SHEET
Three-phase induction motor - Squirrel cage rotor

Customer	:
Product line	: W01 - TEFC - NEMA Premium Efficiency

Frame	: 182/4T
Output	: 2 HP
Frequency	: 60 Hz
Poles	: 6
Full load speed	: 1170 rpm
Slip	: 2.50 %
Voltage	: 208-230/460 V
Rated current	: 6.63-6.00/3.00 A
Locked rotor current	: 45.0/22.5 A
Locked rotor current (Il/In)	: 7.5
No-load current	: 3.74/1.87 A
Full load torque	: 8.86 lb.ft
Locked rotor torque	: 260 %
Breakdown torque	: 370 %
Design	: B
Insulation class	: F
Temperature rise	: 80 K
Locked rotor time	: 44 s (hot)
Service factor	: 1.15
Duty cycle	: S1
Ambient temperature	: -20°C - +40°C
Altitude	: 1000 m
Degree of Protection	: IP55
Approximate weight	: 76 lb
Moment of inertia	: 0.34242 sq.ft.lb
Noise level	: 52 dB(A)

	D.E.	N.D.E.
Bearings	6206 ZZ	6205 ZZ
Regreasing interval	---	---
Grease amount	---	---

Load	Power factor	Efficiency (%)
100%	0.71	88.5
75%	0.62	86.5
50%	0.50	84.0

Notes:

Performed by	Checked

		No.:
		Date: 13-NOV-2020

PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

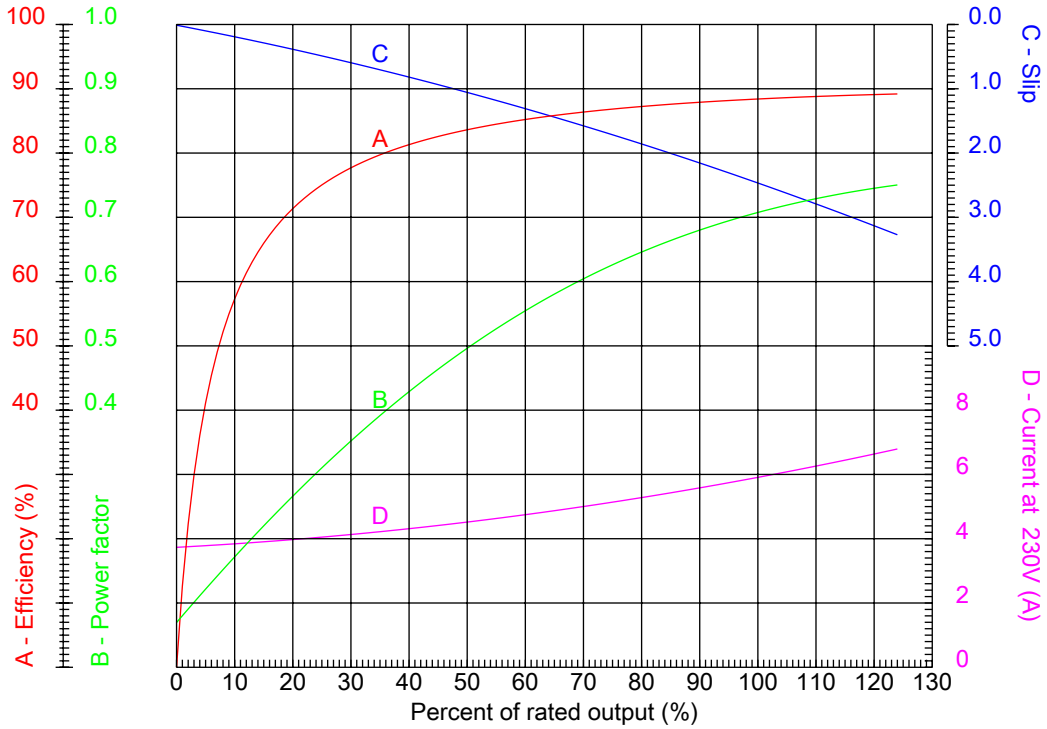

Customer	:	
Product line	:	W01 - TEFC - NEMA Premium Efficiency

Frame	: 182/4T	Locked rotor current (Il/In)	: 7.5
Output	: 2 HP	Duty cycle	: S1
Frequency	: 60 Hz	Service factor	: 1.15
Full load speed	: 1170 rpm	Design	: B
Voltage	: 208-230/460 V	Locked rotor torque	: 260 %
Rated current	: 6.63-6.00/3.00 A	Breakdown torque	: 370 %
Insulation class	: F		

Notes:

Performed by	Checked

weg		No.:
		Date: 13-NOV-2020

CHARACTERISTIC CURVES RELATED TO SPEED

Three-phase induction motor - Squirrel cage rotor

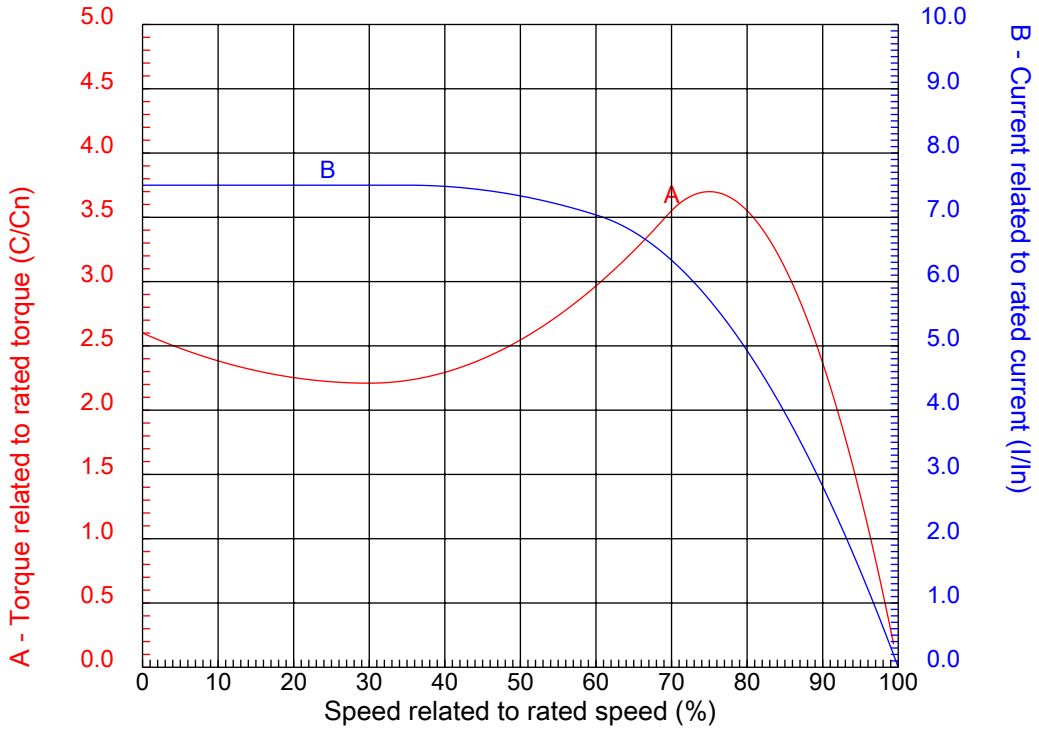

Customer	:
Product line	: W01 - TEFC - NEMA Premium Efficiency

Frame	: 182/4T	Locked rotor current (Il/In)	: 7.5
Output	: 2 HP	Duty cycle	: S1
Frequency	: 60 Hz	Service factor	: 1.15
Full load speed	: 1170 rpm	Design	: B
Voltage	: 208-230/460 V	Locked rotor torque	: 260 %
Rated current	: 6.63-6.00/3.00 A	Breakdown torque	: 370 %
Insulation class	: F		

Notes:

Performed by	Checked

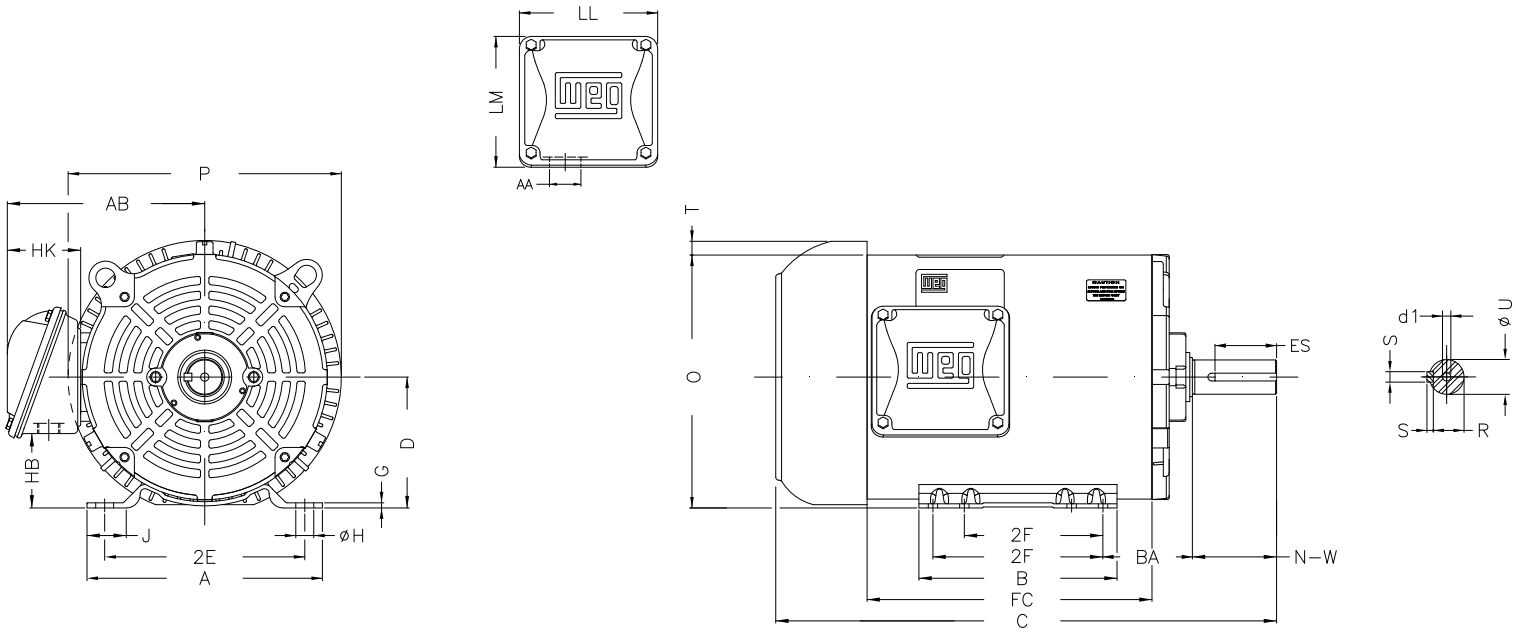

Notes:

Performed by:

Checked:

Customer:

W01 - TEFC - NEMA Premium Efficiency

P 9.435	AB 6.693	J 1.299	2E 7.500	A 8.661
H 0.406	G 0.167	HB 2.776	HK 2.638	T 0.661
O 8.557	FC 9.449	2F 4.500/5.500	B 6.299	C 17.126
BA 2.750	N-W 2.750	ES 1.969	d1 A 3,15	S 0.250
U 1.125	AA 1.118"	depth 0.250	R 0.984	LL 4.547
LM 4.114	BB 0.661	D 4.500	CH 1.377	

Three-phase induction motor

Frame 182/4T - IP55

13-NOV-2020