



No.:

Date: 11-SEP-2020

Customer :

TECHNICAL PROPOSAL

Three-phase induction motor - Squirrel cage rotor

Product line : TEFC - W22 NEMA Premium Efficiency

Catalog Number :

List Price : \$

Notes:

Performed by:

Checked:



No.:

Date: 11-SEP-2020

DATA SHEET**Three-phase induction motor - Squirrel cage rotor**

Customer :
Product line : TEFC - W22 NEMA Premium Efficiency

Frame : 143/5T
Output : 1 HP
Frequency : 60 Hz
Poles : 2
Full load speed : 3500 rpm
Slip : 2.78 %
Voltage : 208-230/460 V
Rated current : 3.16-2.88/1.44 A
Locked rotor current : 23.6/11.8 A
Locked rotor current (I_L/I_n) : 8.2
No-load current : 1.42/0.710 A
Full load torque : 1.48 lb.ft
Locked rotor torque : 320 %
Breakdown torque : 400 %
Design : ---
Insulation class : F
Temperature rise : 80 K
Locked rotor time : 22 s (hot)
Service factor : 1.25
Duty cycle : S1
Ambient temperature : -20°C - +40°C
Altitude : 1000 m
Degree of Protection : IP55
Approximate weight : 36 lb
Moment of inertia : 0.03322 sq.ft.lb
Noise level : 68 dB(A)

	D.E.	N.D.E.
Bearings	6205 ZZ	6204 ZZ
Regreasing interval	---	---
Grease amount	---	---

Load	Power factor	Efficiency (%)
100%	0.80	81.5
75%	0.74	79.0
50%	0.63	75.0

Notes:

Performed by

Checked




No.:

Date: 11-SEP-2020

PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

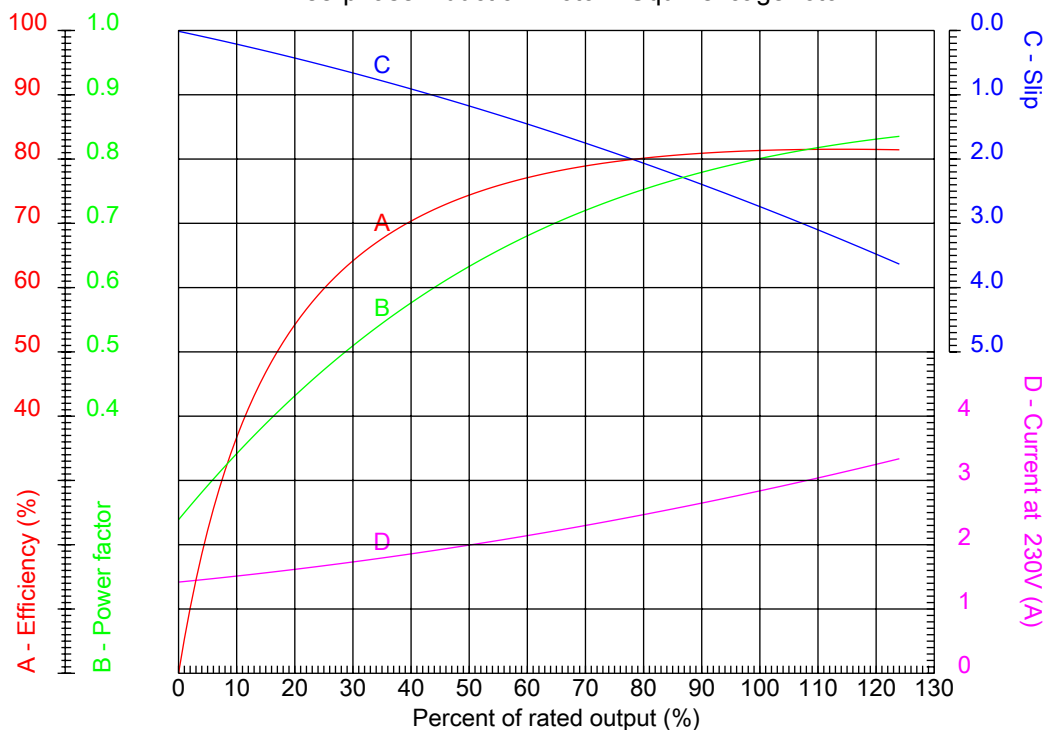

Customer :
Product line : TEFC - W22 NEMA Premium Efficiency

Frame	: 143/5T	Locked rotor current (I _L /I _n)	: 8.2
Output	: 1 HP	Duty cycle	: S1
Frequency	: 60 Hz	Service factor	: 1.25
Full load speed	: 3500 rpm	Design	: ---
Voltage	: 208-230/460 V	Locked rotor torque	: 320 %
Rated current	: 3.16-2.88/1.44 A	Breakdown torque	: 400 %
Insulation class	: F		

Notes:

Performed by

Checked




No.:

Date: 11-SEP-2020

CHARACTERISTIC CURVES RELATED TO SPEED

Three-phase induction motor - Squirrel cage rotor

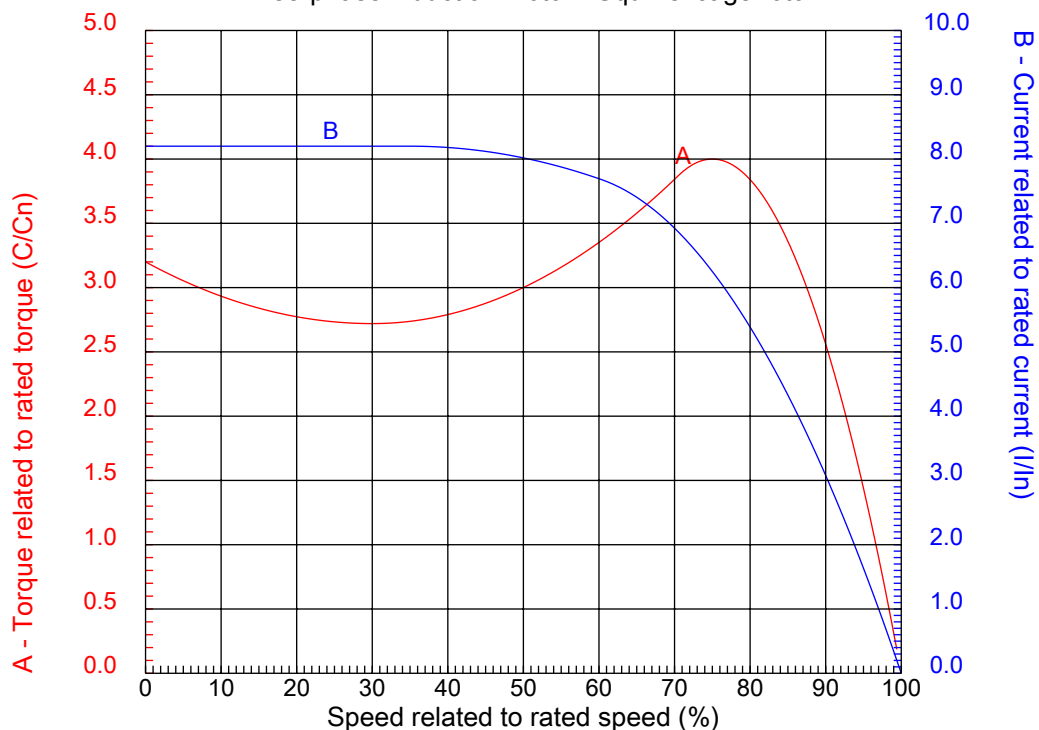


Customer :
Product line : TEFC - W22 NEMA Premium Efficiency

Frame	: 143/5T	Locked rotor current (I _L /I _n)	: 8.2
Output	: 1 HP	Duty cycle	: S1
Frequency	: 60 Hz	Service factor	: 1.25
Full load speed	: 3500 rpm	Design	: ---
Voltage	: 208-230/460 V	Locked rotor torque	: 320 %
Rated current	: 3.16-2.88/1.44 A	Breakdown torque	: 400 %
Insulation class	: F		

Notes:

Performed by

Checked

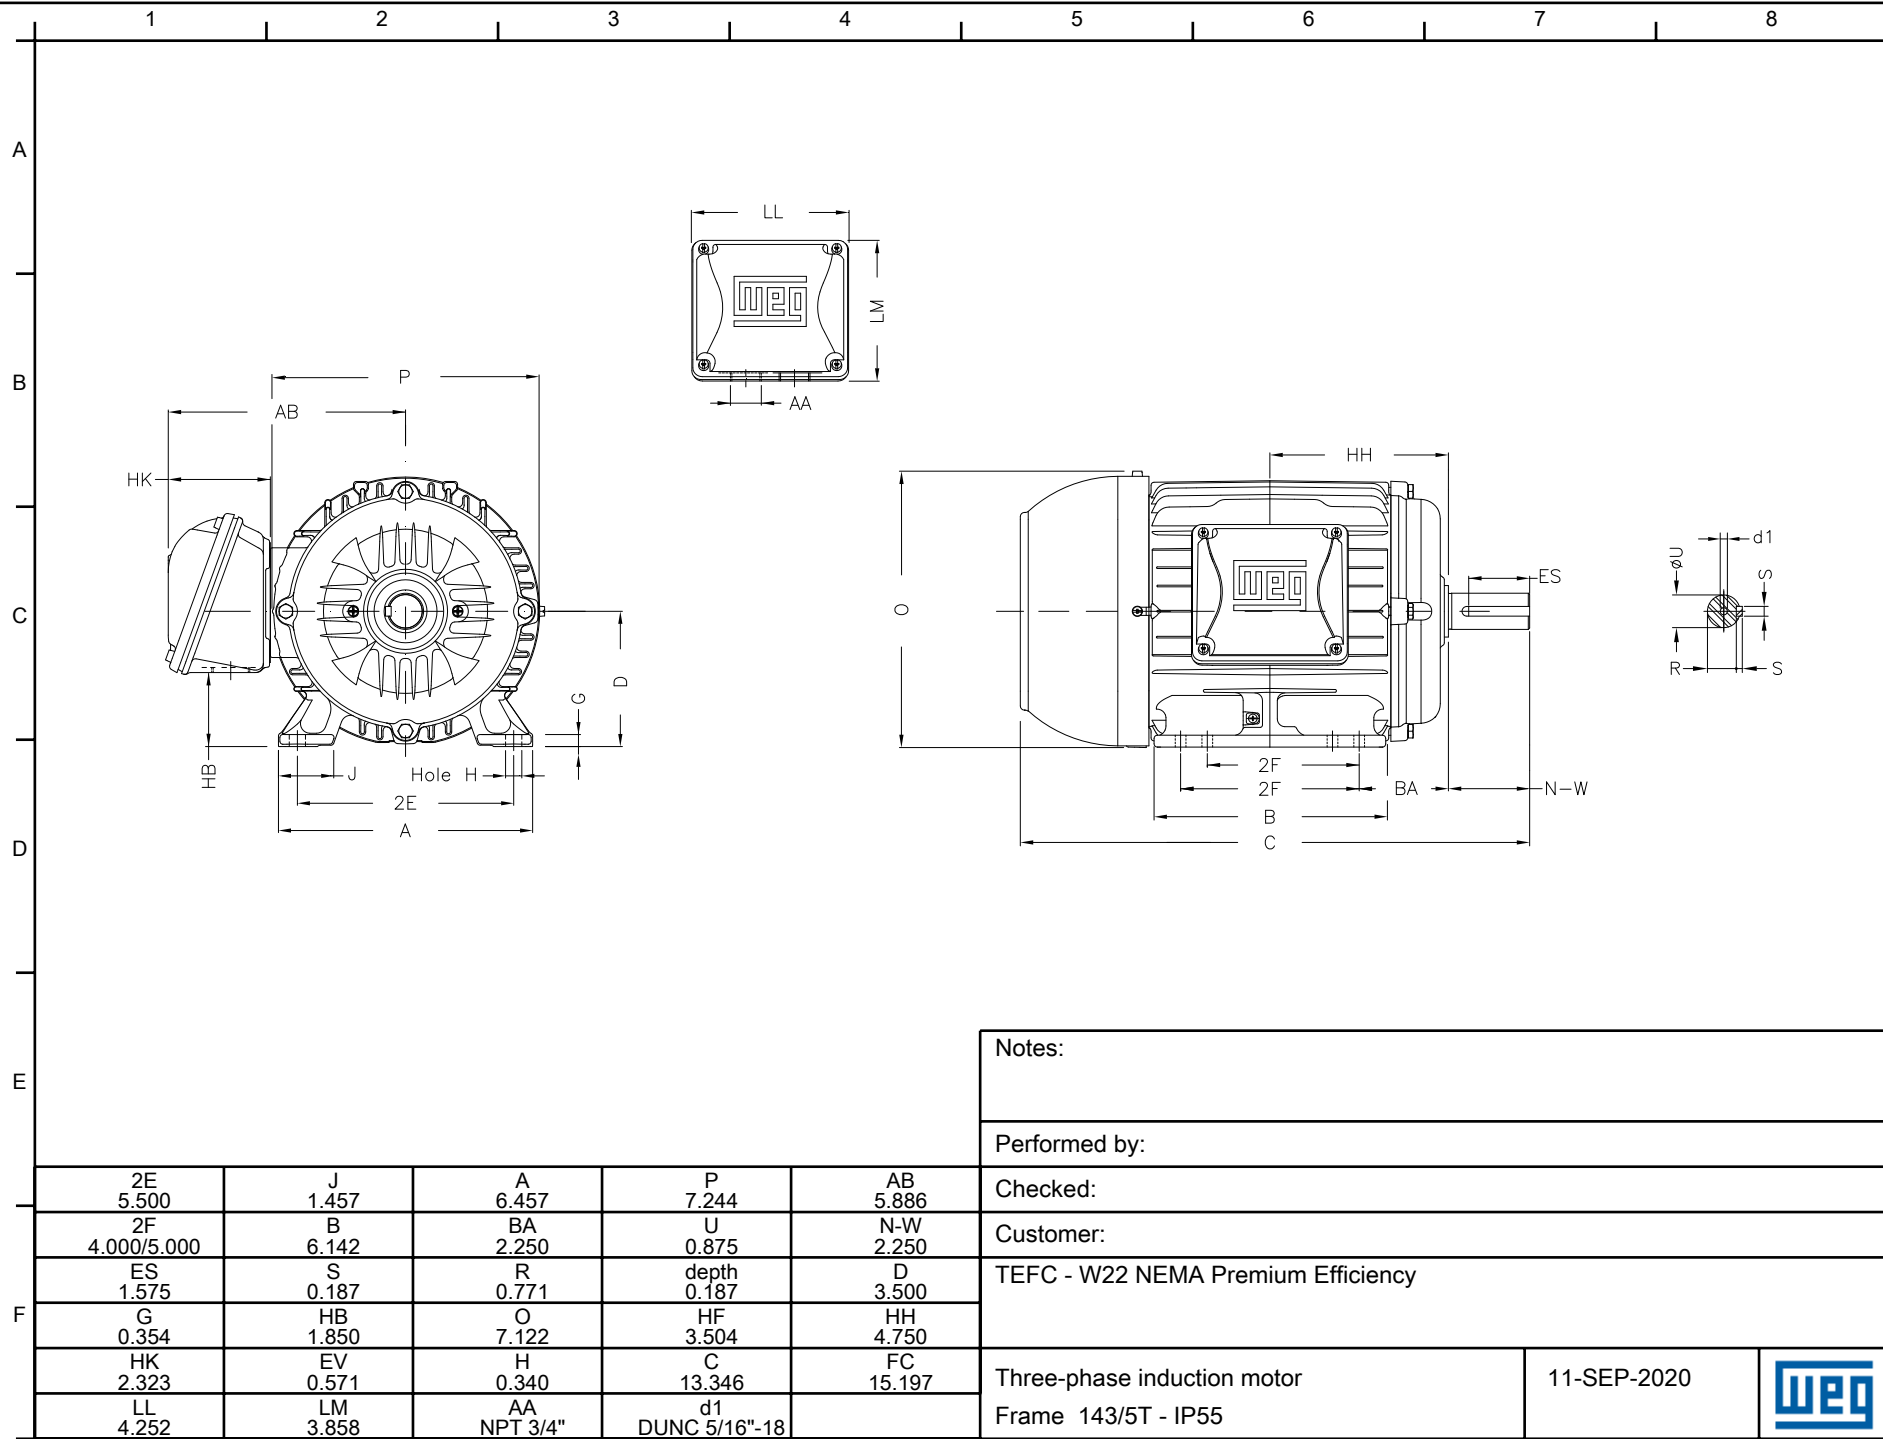

2E	J	A	P	AB
5.500	1.457	6.457	7.244	5.886
2F	B	BA	U	N-W
4.000/5.000	6.142	2.250	0.875	2.250
ES	S	R	depth	D
1.575	0.187	0.771	0.187	3.500
G	HB	O	HF	HH
0.354	1.850	7.122	3.504	4.750
HK	EV	H	C	FC
2.323	0.571	0.340	13.346	15.197
LL	LM	AA	d1	
4.252	3.858	NPT 3/4"	DUNC 5/16"-18	