



No.:

Date: 11-SEP-2020

Customer :

## TECHNICAL PROPOSAL

## Three-phase induction motor - Squirrel cage rotor

Product line : TEFC - W22 NEMA Premium Efficiency

Catalog Number :

List Price : \$

Notes:

Performed by:

Checked:



No.:

Date: 11-SEP-2020

**DATA SHEET****Three-phase induction motor - Squirrel cage rotor**

Customer :  
Product line : TEFC - W22 NEMA Premium Efficiency

Frame : 213/5T  
Output : 10 HP  
Frequency : 60 Hz  
Poles : 2  
Full load speed : 3510 rpm  
Slip : 2.50 %  
Voltage : 208-230/460 V  
Rated current : 25.7-23.2/11.6 A  
Locked rotor current : 167/83.5 A  
Locked rotor current (I<sub>L</sub>/I<sub>n</sub>) : 7.2  
No-load current : 6.80/3.40 A  
Full load torque : 14.8 lb.ft  
Locked rotor torque : 220 %  
Breakdown torque : 290 %  
Design : B  
Insulation class : F  
Temperature rise : 80 K  
Locked rotor time : 24 s (hot)  
Service factor : 1.25  
Duty cycle : S1  
Ambient temperature : -20°C - +40°C  
Altitude : 1000 m  
Degree of Protection : IP55  
Approximate weight : 163 lb  
Moment of inertia : 0.63620 sq.ft.lb  
Noise level : 68 dB(A)

|                     | D.E.    | N.D.E.  |
|---------------------|---------|---------|
| Bearings            | 6308 ZZ | 6207 ZZ |
| Regreasing interval | ---     | ---     |
| Grease amount       | ---     | ---     |

| Load | Power factor | Efficiency (%) |
|------|--------------|----------------|
| 100% | 0.90         | 90.2           |
| 75%  | 0.87         | 90.2           |
| 50%  | 0.79         | 89.5           |

Notes:

Performed by

Checked




No.:

Date: 11-SEP-2020

## PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

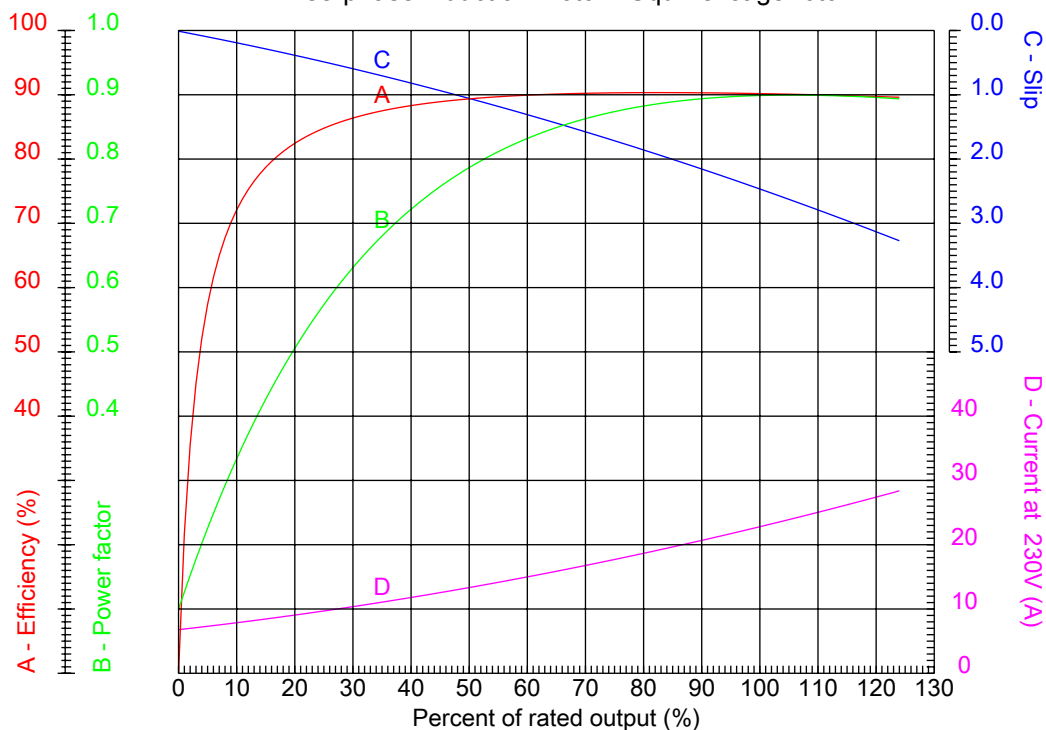

Customer :  
Product line : TEFC - W22 NEMA Premium Efficiency

|                  |                    |                                                        |         |
|------------------|--------------------|--------------------------------------------------------|---------|
| Frame            | : 213/5T           | Locked rotor current (I <sub>L</sub> /I <sub>n</sub> ) | : 7.2   |
| Output           | : 10 HP            | Duty cycle                                             | : S1    |
| Frequency        | : 60 Hz            | Service factor                                         | : 1.25  |
| Full load speed  | : 3510 rpm         | Design                                                 | : B     |
| Voltage          | : 208-230/460 V    | Locked rotor torque                                    | : 220 % |
| Rated current    | : 25.7-23.2/11.6 A | Breakdown torque                                       | : 290 % |
| Insulation class | : F                |                                                        |         |

Notes:

Performed by

Checked




No.:

Date: 11-SEP-2020

## CHARACTERISTIC CURVES RELATED TO SPEED

Three-phase induction motor - Squirrel cage rotor

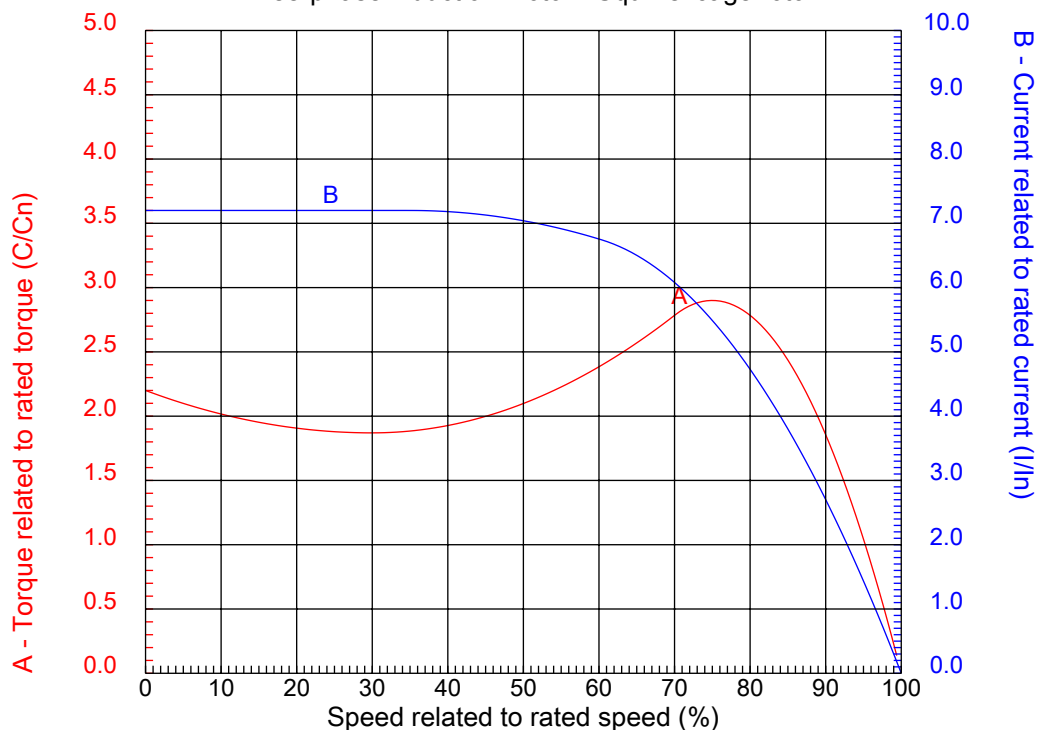

Customer :  
Product line : TEFC - W22 NEMA Premium Efficiency

|                  |                    |                                                        |         |
|------------------|--------------------|--------------------------------------------------------|---------|
| Frame            | : 213/5T           | Locked rotor current (I <sub>L</sub> /I <sub>n</sub> ) | : 7.2   |
| Output           | : 10 HP            | Duty cycle                                             | : S1    |
| Frequency        | : 60 Hz            | Service factor                                         | : 1.25  |
| Full load speed  | : 3510 rpm         | Design                                                 | : B     |
| Voltage          | : 208-230/460 V    | Locked rotor torque                                    | : 220 % |
| Rated current    | : 25.7-23.2/11.6 A | Breakdown torque                                       | : 290 % |
| Insulation class | : F                |                                                        |         |

Notes:

Performed by

Checked

