



No.:

Date: 11-SEP-2020

Customer :

TECHNICAL PROPOSAL

Three-phase induction motor - Squirrel cage rotor

Product line : TEFC - W22 NEMA Premium Efficiency

Catalog Number :

List Price : \$

Notes:

Performed by:

Checked:



No.:

Date: 11-SEP-2020

DATA SHEET**Three-phase induction motor - Squirrel cage rotor**

Customer :
Product line : TEFC - W22 NEMA Premium Efficiency

Frame : 284/6TS
Output : 25 HP
Frequency : 60 Hz
Poles : 2
Full load speed : 3545 rpm
Slip : 1.53 %
Voltage : 575 V
Rated current : 23.0 A
Locked rotor current : 145 A
Locked rotor current (I_L/I_n) : 6.3
No-load current : 6.40 A
Full load torque : 36.5 lb.ft
Locked rotor torque : 200 %
Breakdown torque : 250 %
Design : B
Insulation class : F
Temperature rise : 80 K
Locked rotor time : 17 s (hot)
Service factor : 1.25
Duty cycle : S1
Ambient temperature : -20°C - +40°C
Altitude : 1000 m
Degree of Protection : IP55
Approximate weight : 362 lb
Moment of inertia : 2.6936 sq.ft.lb
Noise level : 72 dB(A)

	D.E.	N.D.E.
Bearings	6311 C3	6211 C3
Regreasing interval	14000 h	17000 h
Grease amount	18 g	11 g

Load	Power factor	Efficiency (%)
100%	0.88	91.7
75%	0.86	91.7
50%	0.79	91.0

Notes:

Performed by

Checked




No.:

Date: 11-SEP-2020

PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

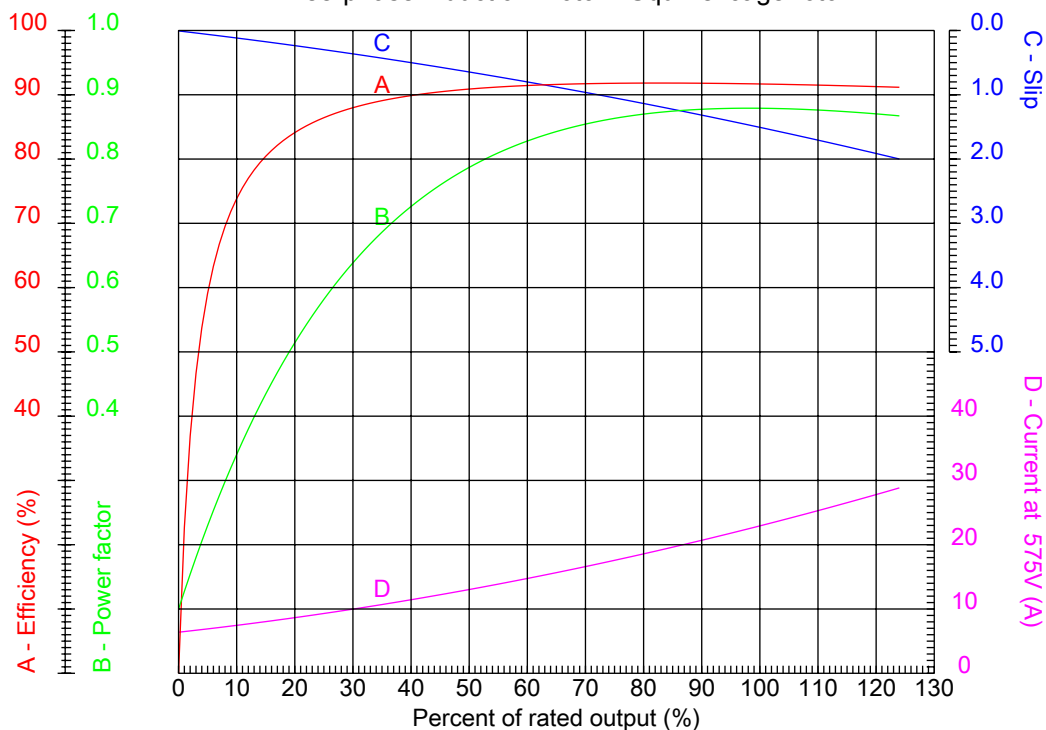

Customer :
Product line : TEFC - W22 NEMA Premium Efficiency

Frame	: 284/6TS	Locked rotor current (I _L /I _n)	: 6.3
Output	: 25 HP	Duty cycle	: S1
Frequency	: 60 Hz	Service factor	: 1.25
Full load speed	: 3545 rpm	Design	: B
Voltage	: 575 V	Locked rotor torque	: 200 %
Rated current	: 23.0 A	Breakdown torque	: 250 %
Insulation class	: F		

Notes:

Performed by

Checked




No.:

Date: 11-SEP-2020

CHARACTERISTIC CURVES RELATED TO SPEED

Three-phase induction motor - Squirrel cage rotor

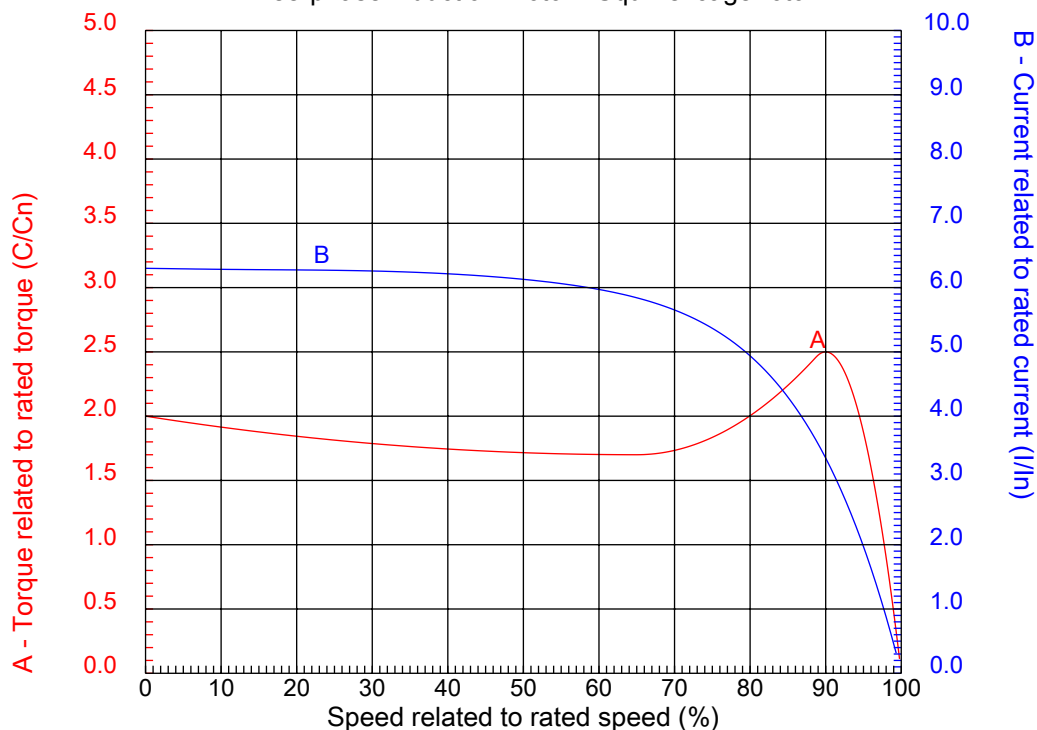


Customer :
Product line : TEFC - W22 NEMA Premium Efficiency

Frame	: 284/6TS	Locked rotor current (I _L /I _n)	: 6.3
Output	: 25 HP	Duty cycle	: S1
Frequency	: 60 Hz	Service factor	: 1.25
Full load speed	: 3545 rpm	Design	: B
Voltage	: 575 V	Locked rotor torque	: 200 %
Rated current	: 23.0 A	Breakdown torque	: 250 %
Insulation class	: F		

Notes:

Performed by

Checked

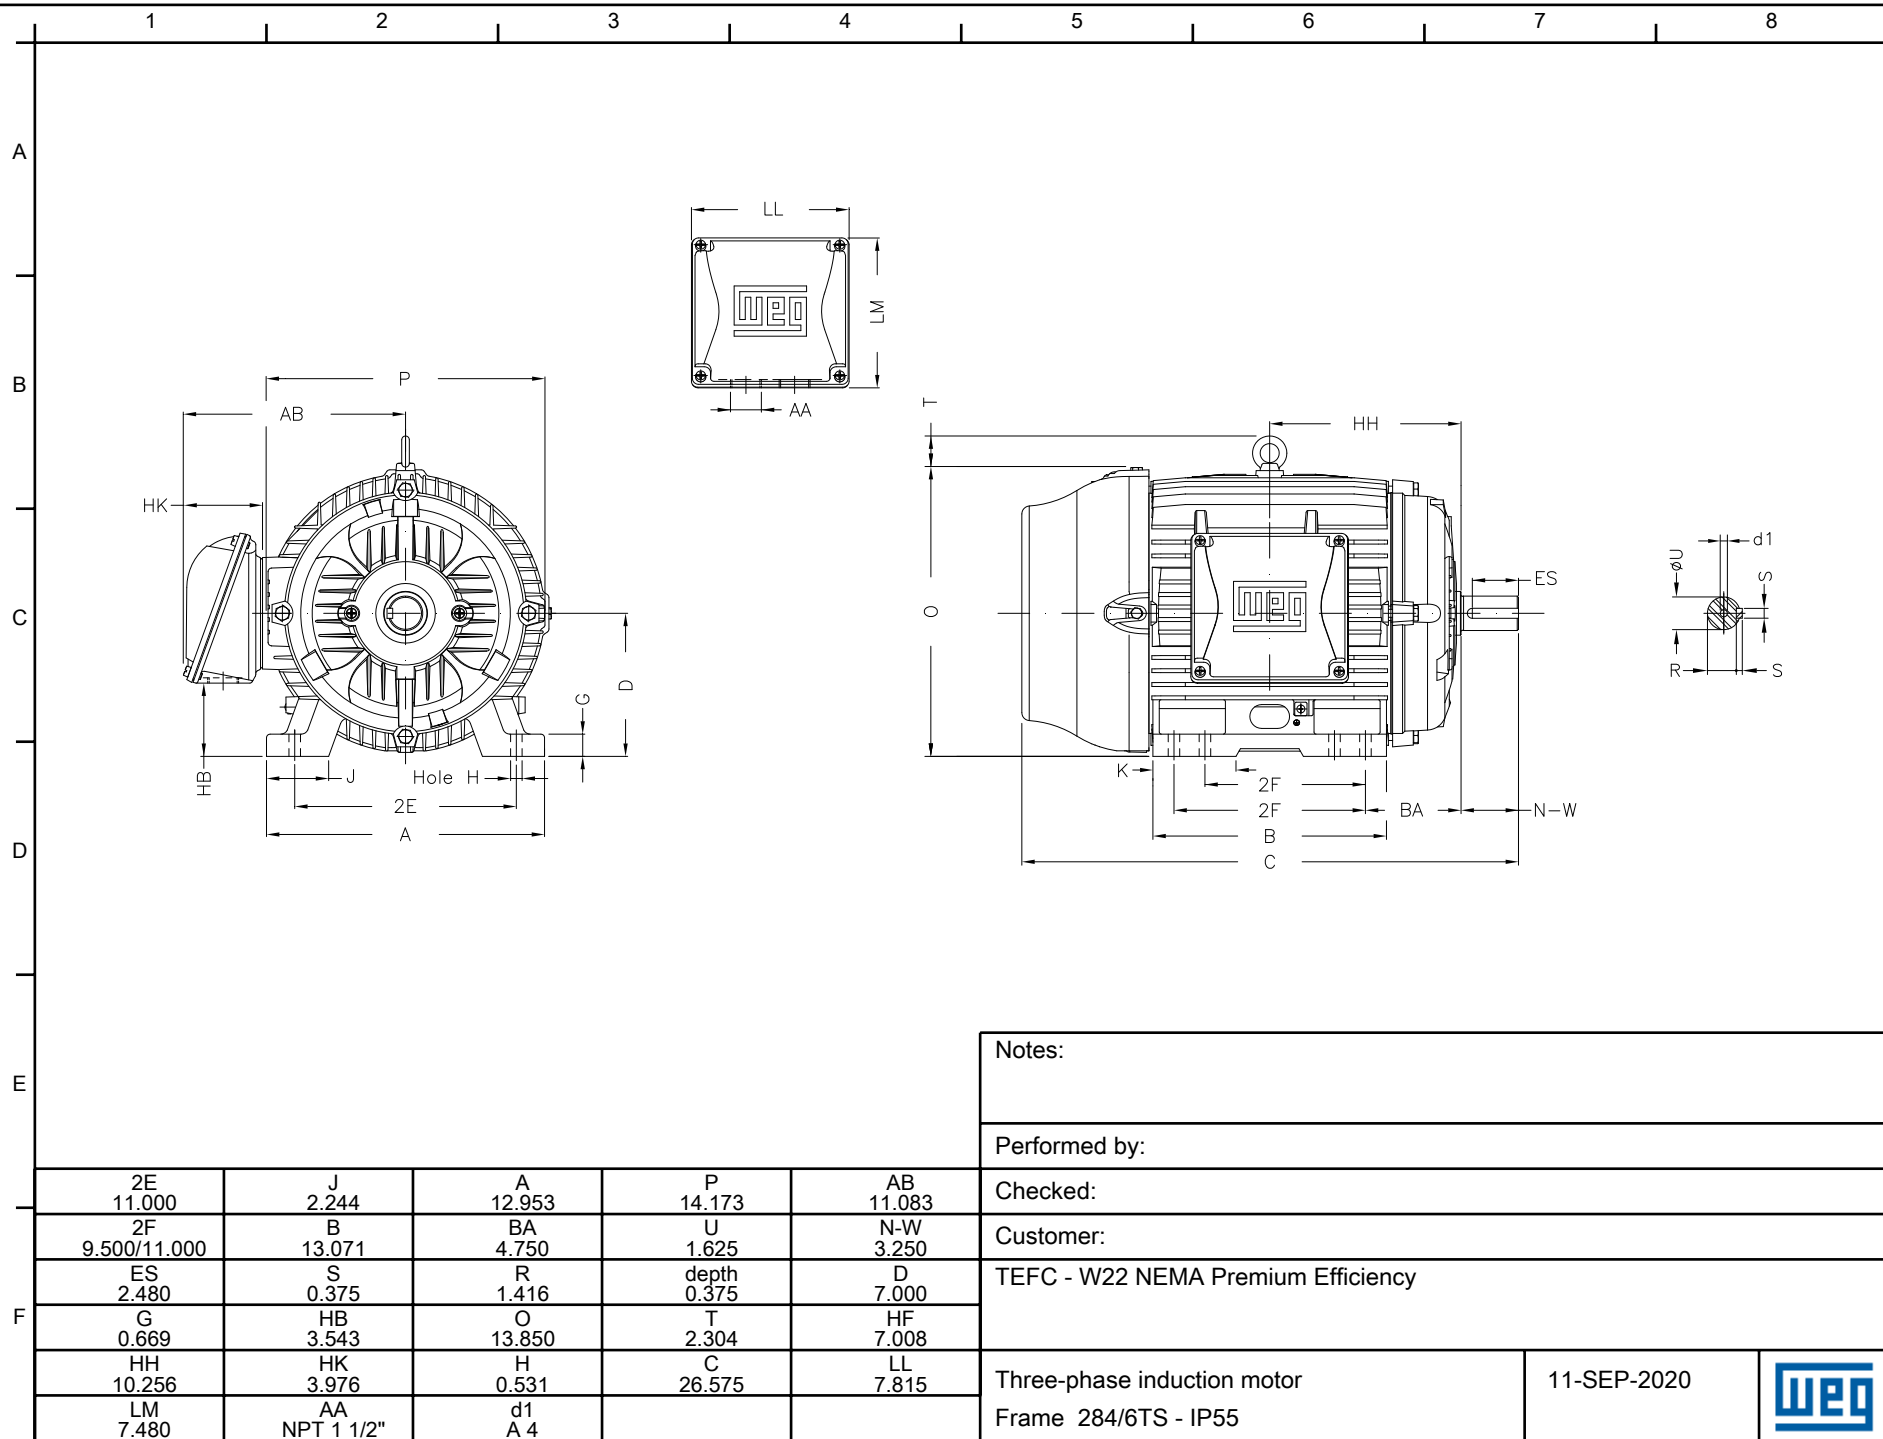

Notes:		
Performed by:		
Checked:		
Customer:		
TEFC - W22 NEMA Premium Efficiency		
Three-phase induction motor Frame 284/6TS - IP55		11-SEP-2020