



No.:

Date: 11-SEP-2020

Customer :

## TECHNICAL PROPOSAL

## Three-phase induction motor - Squirrel cage rotor

Product line : TEFC - W22 NEMA Premium Efficiency

Catalog Number :

List Price : \$

Notes:

Performed by:

Checked:



No.:

Date: 11-SEP-2020

## DATA SHEET

## Three-phase induction motor - Squirrel cage rotor

Customer :  
Product line : TEFC - W22 NEMA Premium Efficiency

Frame : 364/5TS  
Output : 75 HP  
Frequency : 60 Hz  
Poles : 2  
Full load speed : 3555 rpm  
Slip : 1.25 %  
Voltage : 575 V  
Rated current : 65.5 A  
Locked rotor current : 439 A  
Locked rotor current (I<sub>L</sub>/I<sub>n</sub>) : 6.7  
No-load current : 16.0 A  
Full load torque : 109 lb.ft  
Locked rotor torque : 200 %  
Breakdown torque : 250 %  
Design : B  
Insulation class : F  
Temperature rise : 80 K  
Locked rotor time : 10 s (hot)  
Service factor : 1.25  
Duty cycle : S1  
Ambient temperature : -20°C - +40°C  
Altitude : 1000 m  
Degree of Protection : IP55  
Approximate weight : 847 lb  
Moment of inertia : 11.919 sq.ft.lb  
Noise level : 79 dB(A)

|                     | D.E.    | N.D.E.  |
|---------------------|---------|---------|
| Bearings            | 6314 C3 | 6314 C3 |
| Regreasing interval | 4000 h  | 4000 h  |
| Grease amount       | 27 g    | 27 g    |

| Load | Power factor | Efficiency (%) |
|------|--------------|----------------|
| 100% | 0.90         | 93.6           |
| 75%  | 0.88         | 93.6           |
| 50%  | 0.83         | 92.4           |

Notes:

Performed by

Checked




No.:

Date: 11-SEP-2020

## PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

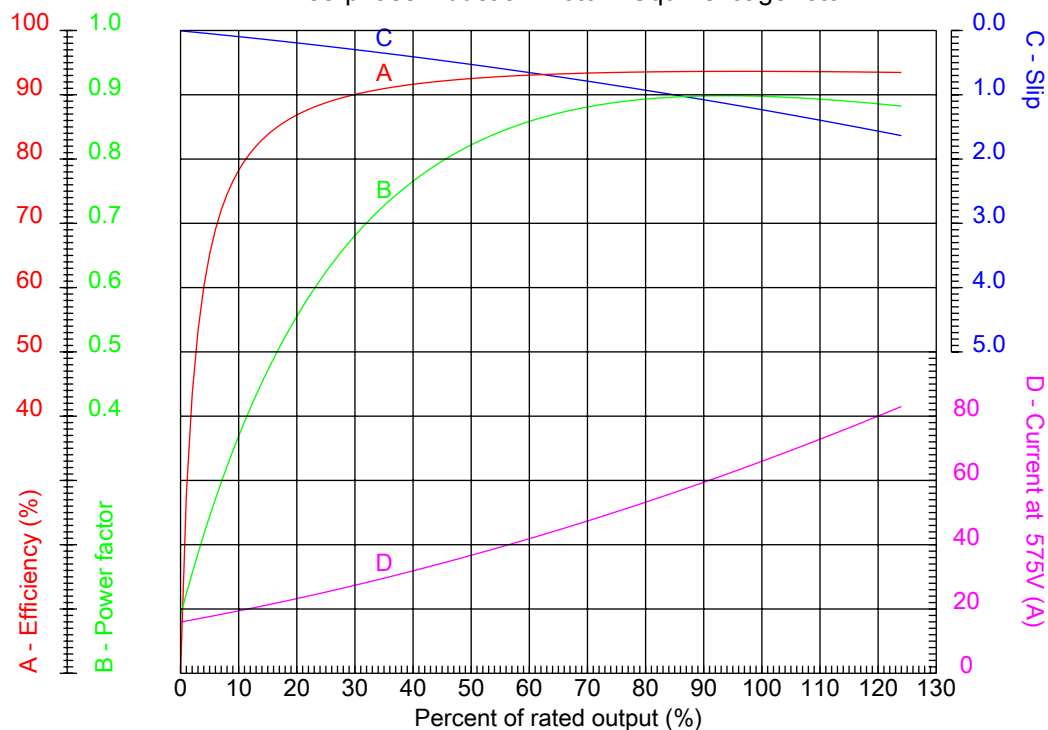

Customer :  
Product line : TEFC - W22 NEMA Premium Efficiency

|                  |            |                                                        |         |
|------------------|------------|--------------------------------------------------------|---------|
| Frame            | : 364/5TS  | Locked rotor current (I <sub>L</sub> /I <sub>n</sub> ) | : 6.7   |
| Output           | : 75 HP    | Duty cycle                                             | : S1    |
| Frequency        | : 60 Hz    | Service factor                                         | : 1.25  |
| Full load speed  | : 3555 rpm | Design                                                 | : B     |
| Voltage          | : 575 V    | Locked rotor torque                                    | : 200 % |
| Rated current    | : 65.5 A   | Breakdown torque                                       | : 250 % |
| Insulation class | : F        |                                                        |         |

Notes:

Performed by

Checked




No.:

Date: 11-SEP-2020

## CHARACTERISTIC CURVES RELATED TO SPEED

Three-phase induction motor - Squirrel cage rotor

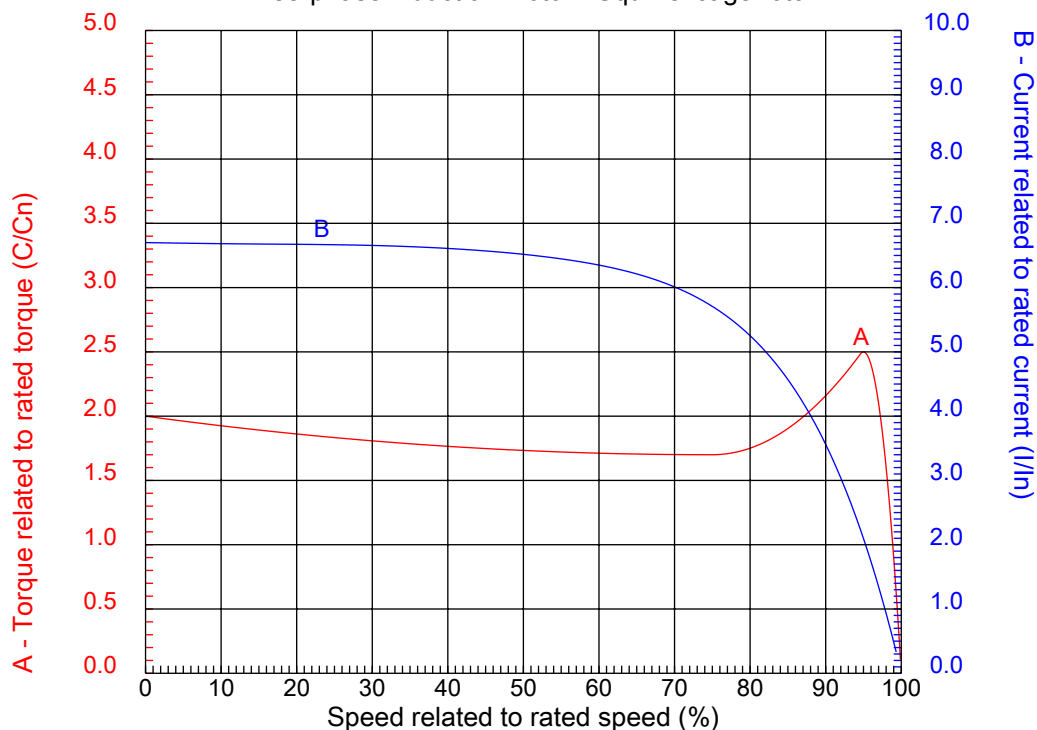

Customer :  
Product line : TEFC - W22 NEMA Premium Efficiency

|                  |            |                                                        |         |
|------------------|------------|--------------------------------------------------------|---------|
| Frame            | : 364/5TS  | Locked rotor current (I <sub>L</sub> /I <sub>n</sub> ) | : 6.7   |
| Output           | : 75 HP    | Duty cycle                                             | : S1    |
| Frequency        | : 60 Hz    | Service factor                                         | : 1.25  |
| Full load speed  | : 3555 rpm | Design                                                 | : B     |
| Voltage          | : 575 V    | Locked rotor torque                                    | : 200 % |
| Rated current    | : 65.5 A   | Breakdown torque                                       | : 250 % |
| Insulation class | : F        |                                                        |         |

Notes:

Performed by

Checked

