



No.:

Date: 11-SEP-2020

Customer :

TECHNICAL PROPOSAL

Three-phase induction motor - Squirrel cage rotor

Product line : TEFC - W22 NEMA Premium Efficiency

Catalog Number :

List Price : \$

Notes:

Performed by:

Checked:



No.:

Date: 11-SEP-2020

DATA SHEET**Three-phase induction motor - Squirrel cage rotor**

Customer :
Product line : TEFC - W22 NEMA Premium Efficiency

Frame : 504/5TS
Output : 250 HP
Frequency : 60 Hz
Poles : 2
Full load speed : 3575 rpm
Slip : 0.69 %
Voltage : 208-230/460 V
Rated current : 595-538/269 A
Locked rotor current : 3770/1880 A
Locked rotor current (I_L/I_N) : 7.0
No-load current : 120/60.0 A
Full load torque : 362 lb.ft
Locked rotor torque : 200 %
Breakdown torque : 240 %
Design : B
Insulation class : F
Temperature rise : 80 K
Locked rotor time : 23 s (hot)
Service factor : 1.15
Duty cycle : S1
Ambient temperature : -20°C - +40°C
Altitude : 1000 m
Degree of Protection : IP55
Approximate weight : 2388 lb
Moment of inertia : 50.262 sq.ft.lb
Noise level : 81 dB(A)

	D.E.	N.D.E.
Bearings	6314 C3	6314 C3
Regreasing interval	4000 h	4000 h
Grease amount	27 g	27 g

Load	Power factor	Efficiency (%)
100%	0.90	95.8
75%	0.89	95.8
50%	0.85	95.0

Notes:

Performed by

Checked




No.:

Date: 11-SEP-2020

PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

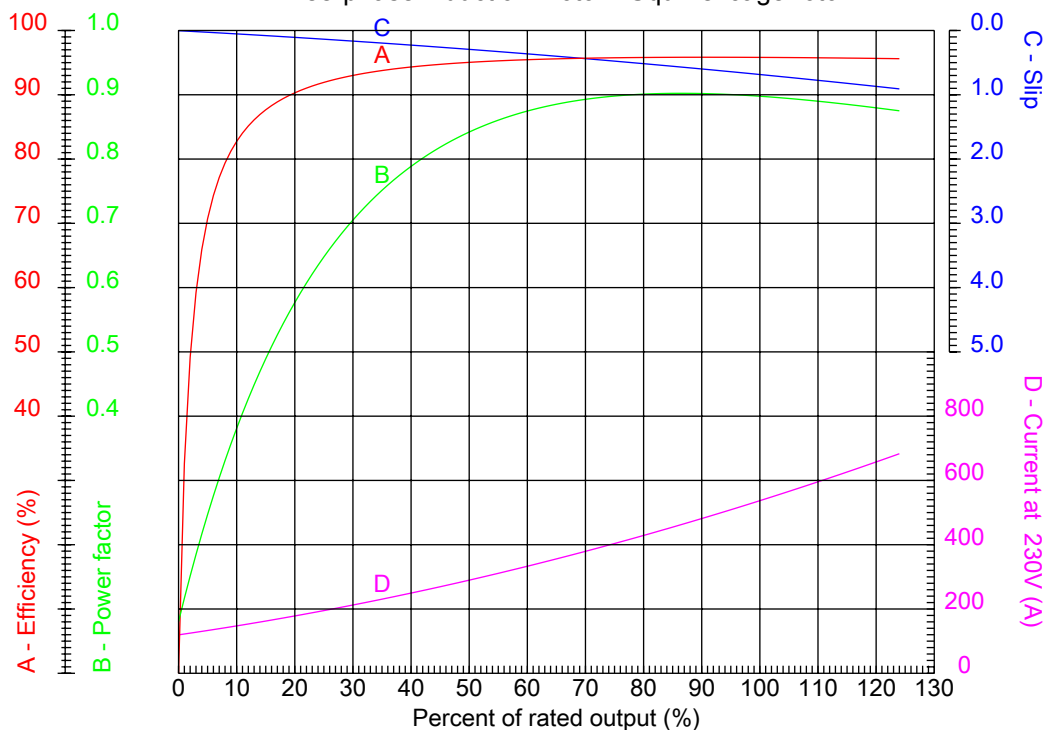

Customer :
Product line : TEFC - W22 NEMA Premium Efficiency

Frame	: 504/5TS	Locked rotor current (I _L /I _n)	: 7.0
Output	: 250 HP	Duty cycle	: S1
Frequency	: 60 Hz	Service factor	: 1.15
Full load speed	: 3575 rpm	Design	: B
Voltage	: 208-230/460 V	Locked rotor torque	: 200 %
Rated current	: 595-538/269 A	Breakdown torque	: 240 %
Insulation class	: F		

Notes:

Performed by

Checked




No.:

Date: 11-SEP-2020

CHARACTERISTIC CURVES RELATED TO SPEED

Three-phase induction motor - Squirrel cage rotor

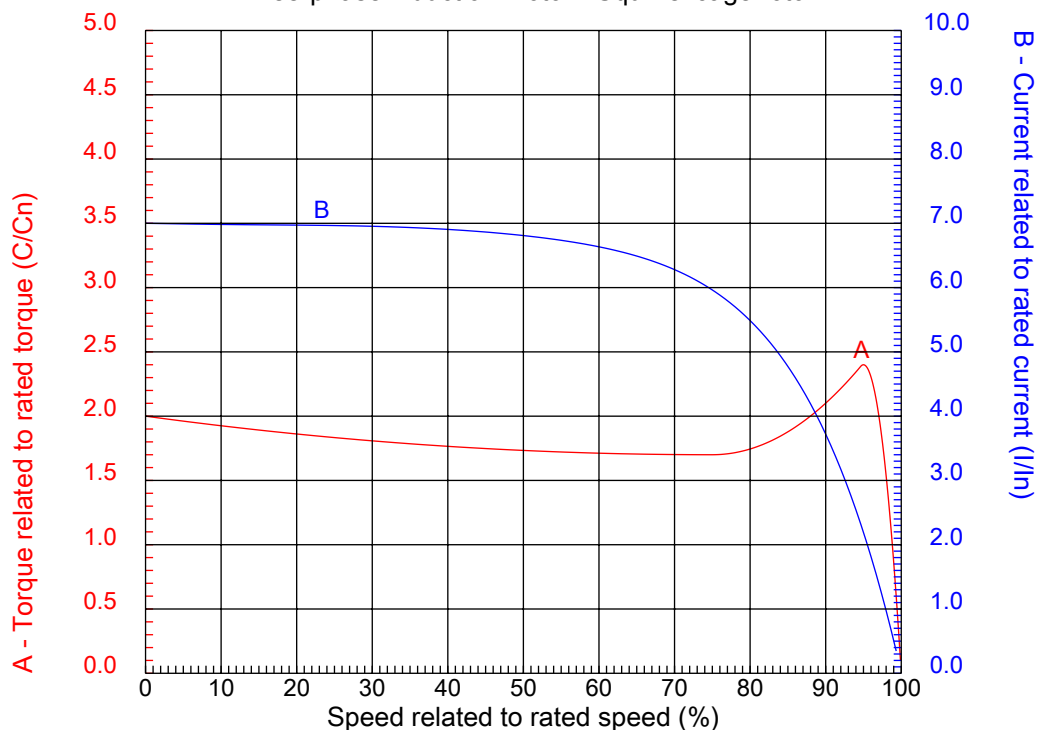

Customer :
Product line : TEFC - W22 NEMA Premium Efficiency

Frame	: 504/5TS	Locked rotor current (I _L /I _n)	: 7.0
Output	: 250 HP	Duty cycle	: S1
Frequency	: 60 Hz	Service factor	: 1.15
Full load speed	: 3575 rpm	Design	: B
Voltage	: 208-230/460 V	Locked rotor torque	: 200 %
Rated current	: 595-538/269 A	Breakdown torque	: 240 %
Insulation class	: F		

Notes:

Performed by

Checked

