



No.:

Date: 11-SEP-2020

Customer :

TECHNICAL PROPOSAL

Three-phase induction motor - Squirrel cage rotor

Product line : TEFC - W22 NEMA Premium Efficiency

Catalog Number :

List Price : \$

Notes:

Performed by:

Checked:



No.:

Date: 11-SEP-2020

DATA SHEET**Three-phase induction motor - Squirrel cage rotor**

Customer :
Product line : TEFC - W22 NEMA Premium Efficiency

Frame : 447/9T
Output : 250 HP
Frequency : 60 Hz
Poles : 4
Full load speed : 1780 rpm
Slip : 1.11 %
Voltage : 575 V
Rated current : 225 A
Locked rotor current : 1460 A
Locked rotor current (I_L/I_n) : 6.5
No-load current : 68.0 A
Full load torque : 728 lb.ft
Locked rotor torque : 230 %
Breakdown torque : 230 %
Design : B
Insulation class : F
Temperature rise : 80 K
Locked rotor time : 15 s (hot)
Service factor : 1.15
Duty cycle : S1
Ambient temperature : -20°C - +40°C
Altitude : 1000 m
Degree of Protection : IP55
Approximate weight : 2359 lb
Moment of inertia : 89.555 sq.ft.lb
Noise level : 75 dB(A)

	D.E.	N.D.E.
Bearings	6322 C3	6319 C3
Regreasing interval	6000 h	8000 h
Grease amount	60 g	45 g

Load	Power factor	Efficiency (%)
100%	0.86	96.2
75%	0.83	96.2
50%	0.75	95.8

Notes:

Performed by

Checked




No.:

Date: 11-SEP-2020

PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

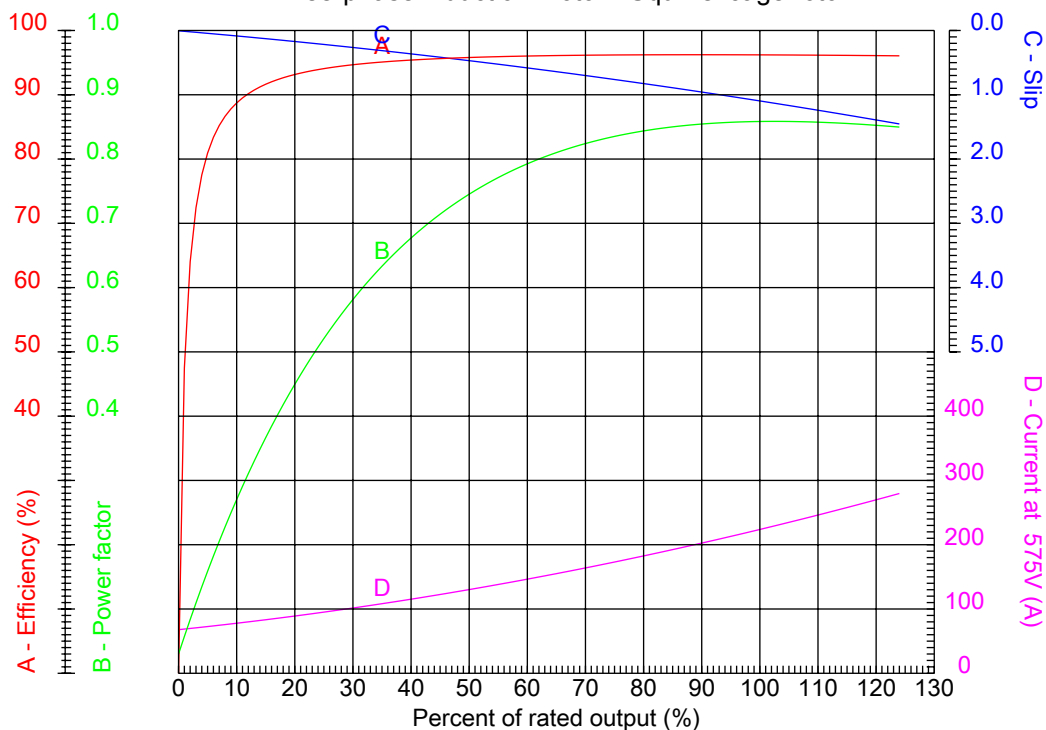

Customer :
Product line : TEFC - W22 NEMA Premium Efficiency

Frame	: 447/9T	Locked rotor current (I _L /I _n)	: 6.5
Output	: 250 HP	Duty cycle	: S1
Frequency	: 60 Hz	Service factor	: 1.15
Full load speed	: 1780 rpm	Design	: B
Voltage	: 575 V	Locked rotor torque	: 230 %
Rated current	: 225 A	Breakdown torque	: 230 %
Insulation class	: F		

Notes:

Performed by

Checked




No.:

Date: 11-SEP-2020

CHARACTERISTIC CURVES RELATED TO SPEED

Three-phase induction motor - Squirrel cage rotor

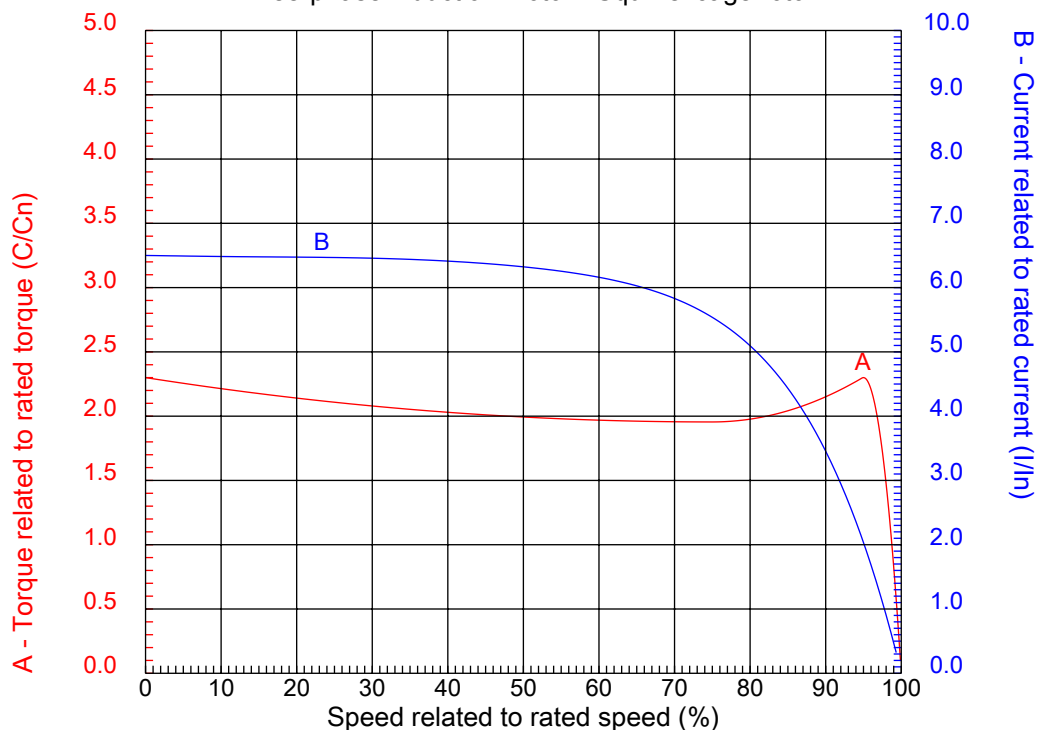


Customer :
Product line : TEFC - W22 NEMA Premium Efficiency

Frame	: 447/9T	Locked rotor current (I _L /I _n)	: 6.5
Output	: 250 HP	Duty cycle	: S1
Frequency	: 60 Hz	Service factor	: 1.15
Full load speed	: 1780 rpm	Design	: B
Voltage	: 575 V	Locked rotor torque	: 230 %
Rated current	: 225 A	Breakdown torque	: 230 %
Insulation class	: F		

Notes:

Performed by

Checked

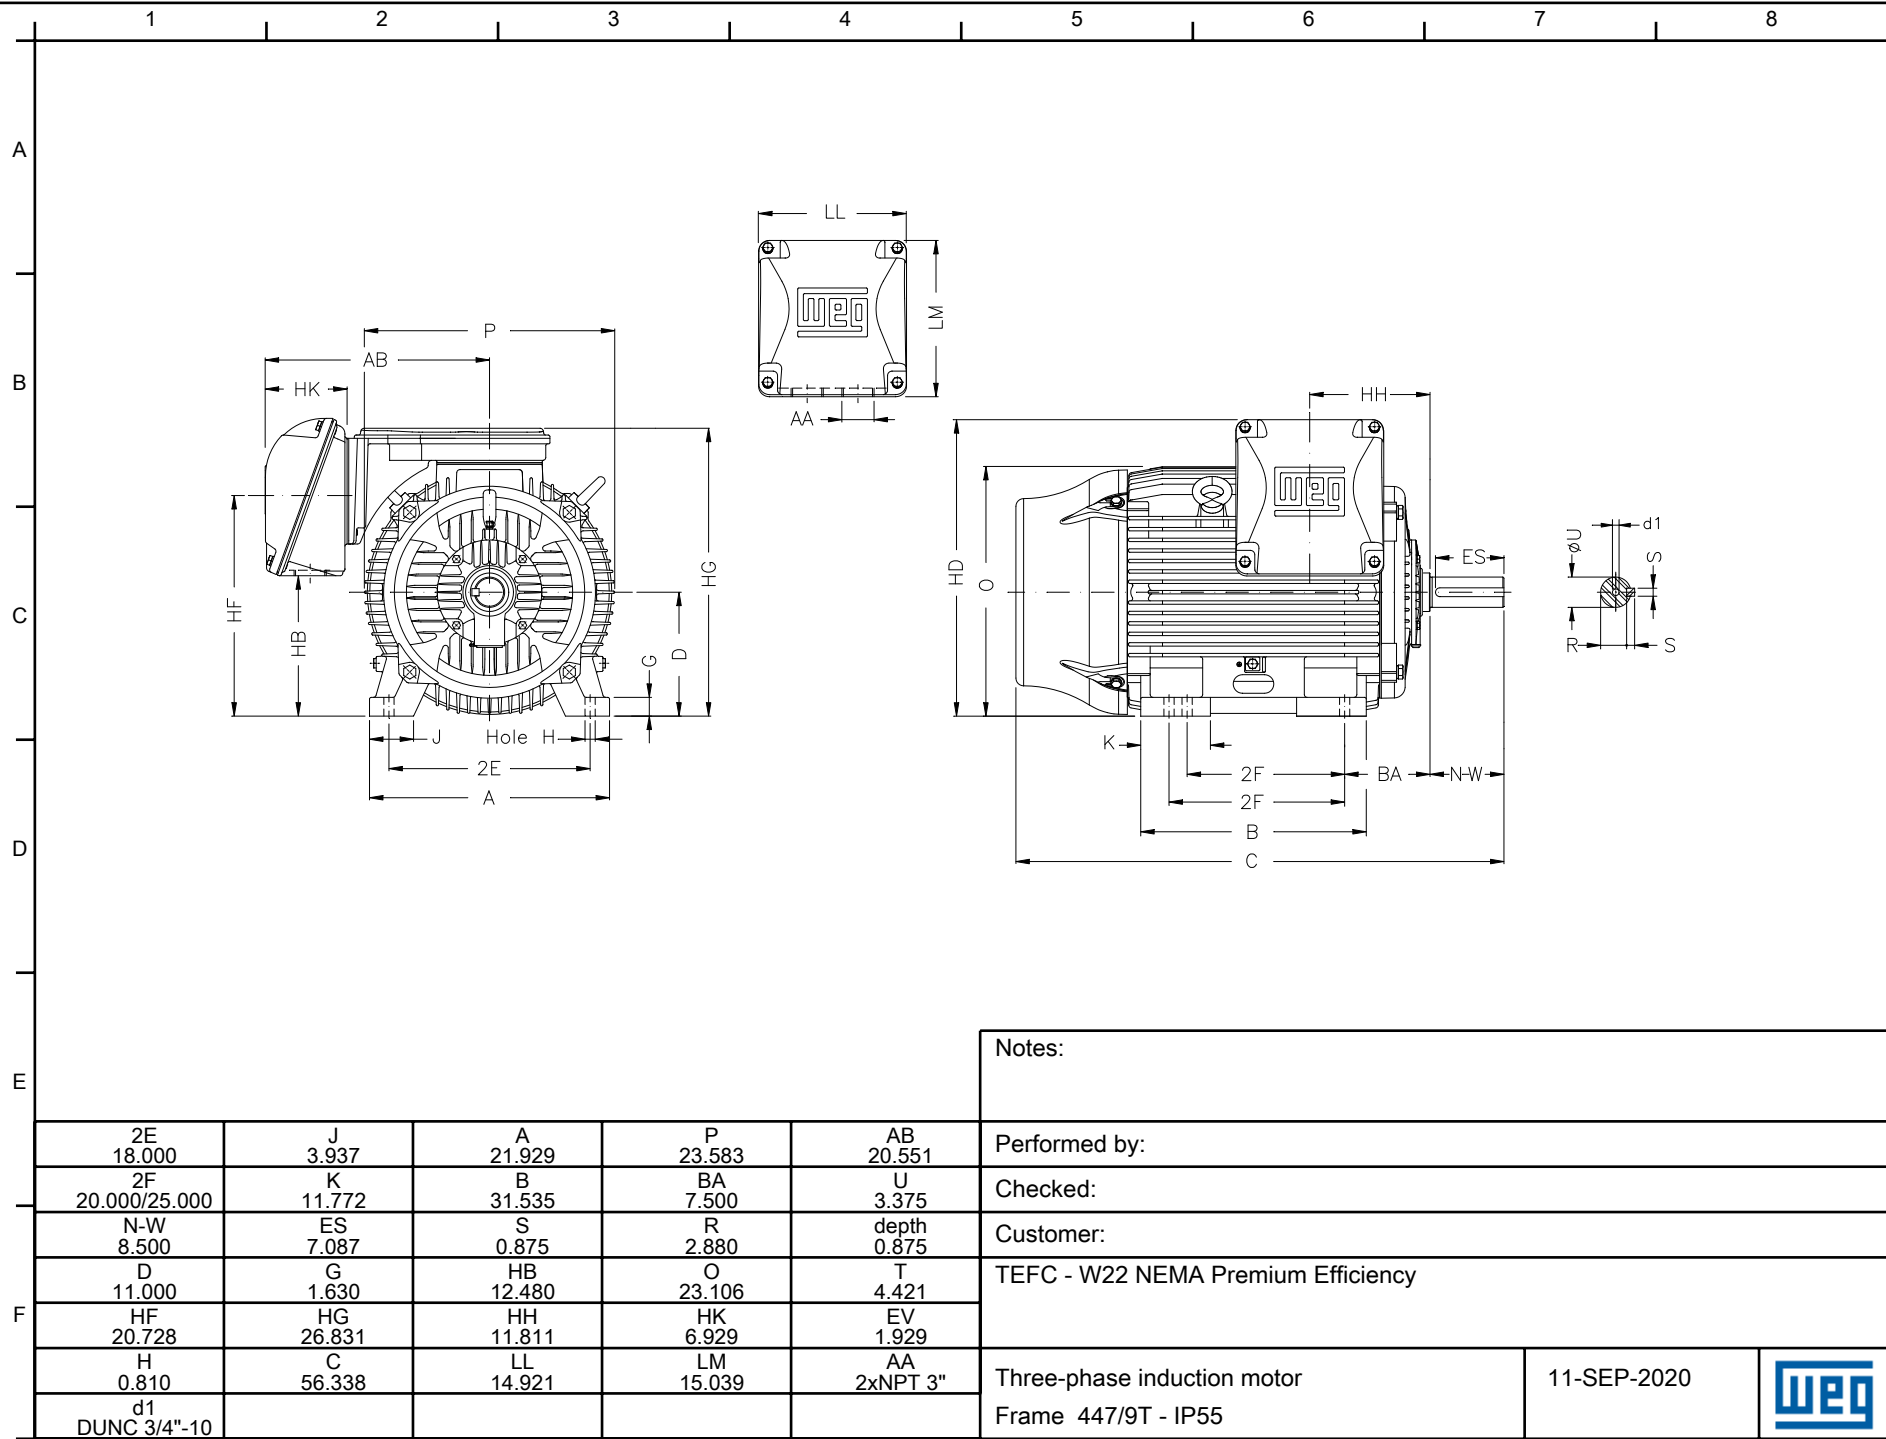

Notes:		
Performed by:		
Checked:		
Customer:		
TEFC - W22 NEMA Premium Efficiency		
Three-phase induction motor Frame 447/9T - IP55	11-SEP-2020	

2E	J	A	P	AB
18.000	3.937	21.929	23.583	20.551
2F	K	B	BA	U
20.000/25.000	11.772	31.535	7.500	3.375
N-W	ES	S	R	depth
8.500	7.087	0.875	2.880	0.875
D	G	HB	O	T
11.000	1.630	12.480	23.106	4.421
HF	HG	HH	HK	EV
20.728	26.831	11.811	6.929	1.929
H	C	LL	LM	AA
0.810	56.338	14.921	15.039	2xNPT 3"
d1				
DUNC 3/4"-10				