



No.:

Date: 11-SEP-2020

Customer :

TECHNICAL PROPOSAL

Three-phase induction motor - Squirrel cage rotor

Product line : TEFC - W22 NEMA Premium Efficiency

Catalog Number :

List Price : \$

Notes:

Performed by:

Checked:



No.:

Date: 11-SEP-2020

DATA SHEET**Three-phase induction motor - Squirrel cage rotor**

Customer :
Product line : TEFC - W22 NEMA Premium Efficiency

Frame : 447/9T
Output : 300 HP
Frequency : 60 Hz
Poles : 6
Full load speed : 1189 rpm
Slip : 0.92 %
Voltage : 575 V
Rated current : 285 A
Locked rotor current : 2190 A
Locked rotor current (I_L/I_n) : 7.7
No-load current : 136 A
Full load torque : 1307 lb.ft
Locked rotor torque : 270 %
Breakdown torque : 300 %
Design : A
Insulation class : F
Temperature rise : 80 K
Locked rotor time : 10 s (hot)
Service factor : 1.00
Duty cycle : S1
Ambient temperature : -20°C - +40°C
Altitude : 1000 m
Degree of Protection : IP55
Approximate weight : 3197 lb
Moment of inertia : 144.52 sq.ft.lb
Noise level : 70 dB(A)

	D.E.	N.D.E.
Bearings	6322 C3	6319 C3
Regreasing interval	11000 h	13000 h
Grease amount	60 g	45 g

Load	Power factor	Efficiency (%)
100%	0.81	95.8
75%	0.75	95.8
50%	0.63	95.4

Notes:

Performed by

Checked




No.:

Date: 11-SEP-2020

PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

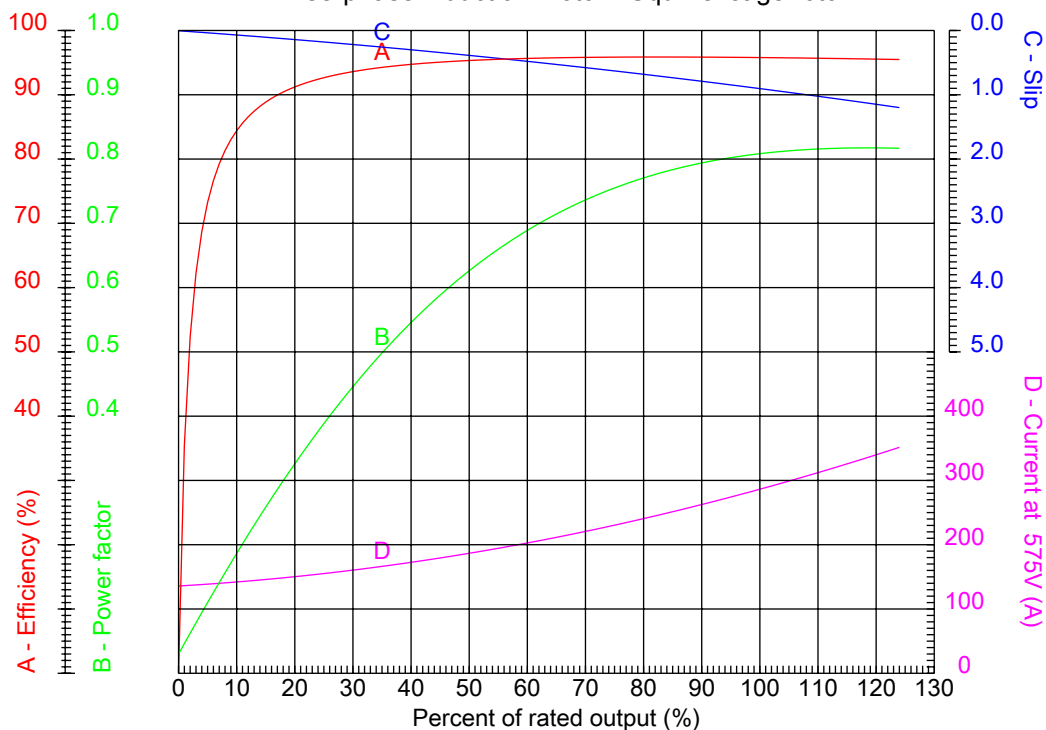

Customer :
Product line : TEFC - W22 NEMA Premium Efficiency

Frame	: 447/9T	Locked rotor current (I _L /I _n)	: 7.7
Output	: 300 HP	Duty cycle	: S1
Frequency	: 60 Hz	Service factor	: 1.00
Full load speed	: 1189 rpm	Design	: A
Voltage	: 575 V	Locked rotor torque	: 270 %
Rated current	: 285 A	Breakdown torque	: 300 %
Insulation class	: F		

Notes:

Performed by

Checked




No.:

Date: 11-SEP-2020

CHARACTERISTIC CURVES RELATED TO SPEED

Three-phase induction motor - Squirrel cage rotor

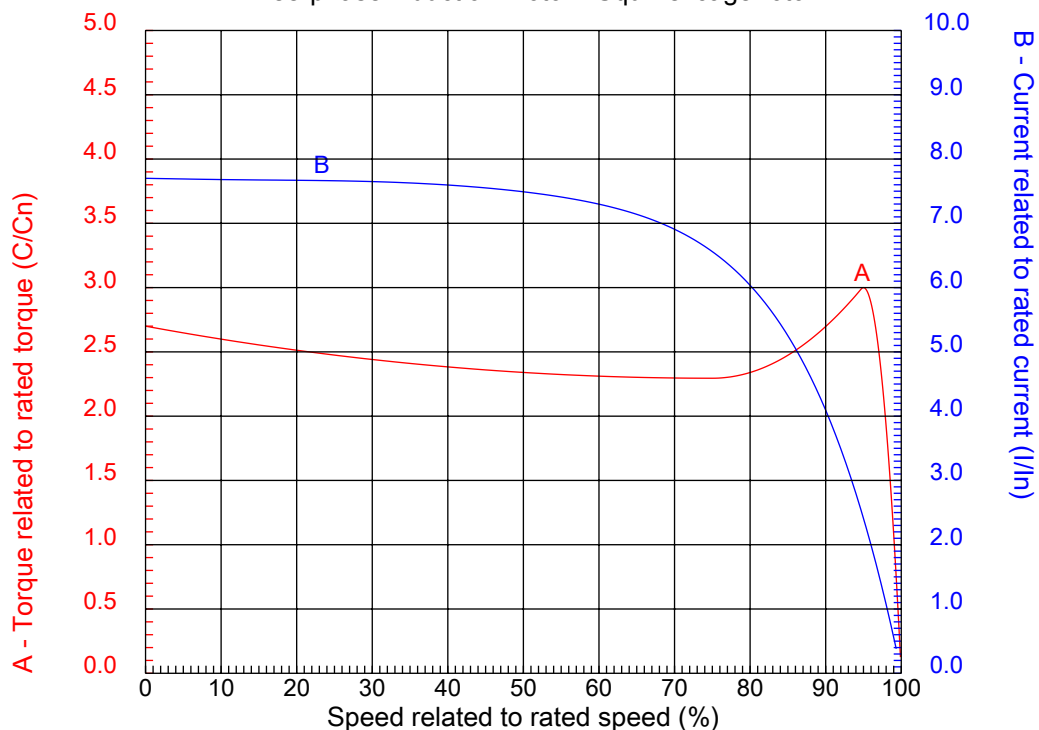


Customer :
Product line : TEFC - W22 NEMA Premium Efficiency

Frame	: 447/9T	Locked rotor current (I _L /I _n)	: 7.7
Output	: 300 HP	Duty cycle	: S1
Frequency	: 60 Hz	Service factor	: 1.00
Full load speed	: 1189 rpm	Design	: A
Voltage	: 575 V	Locked rotor torque	: 270 %
Rated current	: 285 A	Breakdown torque	: 300 %
Insulation class	: F		

Notes:

Performed by

Checked

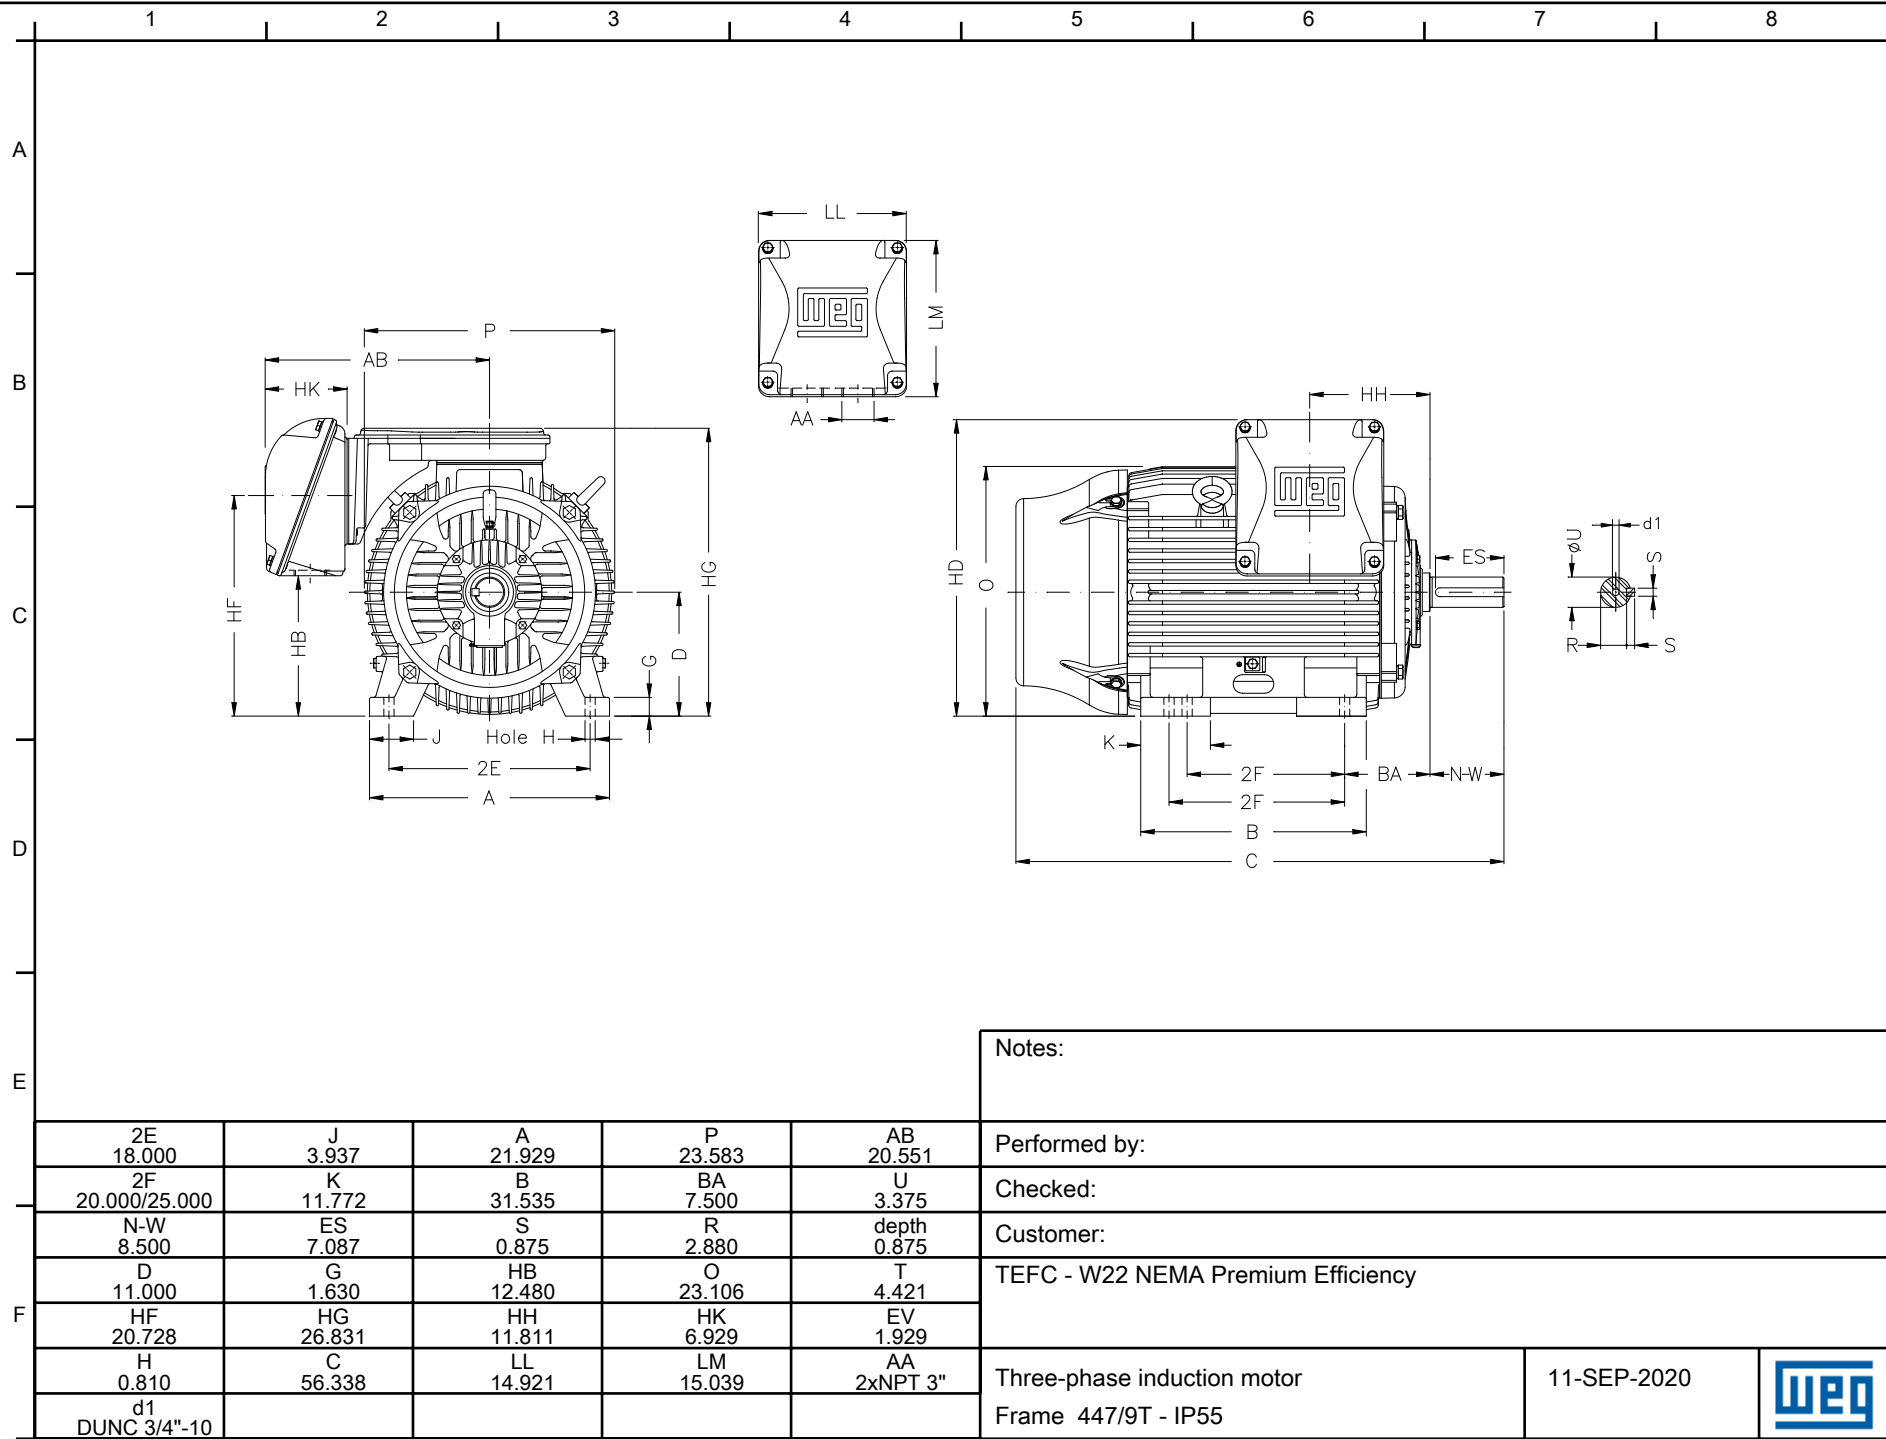

Notes:		
Performed by:		
Checked:		
Customer:		
TEFC - W22 NEMA Premium Efficiency		
Three-phase induction motor Frame 447/9T - IP55	11-SEP-2020	

2E	J	A	P	AB
18.000	3.937	21.929	23.583	20.551
2F	K	B	BA	U
20.000/25.000	11.772	31.535	7.500	3.375
N-W	ES	S	R	depth
8.500	7.087	0.875	2.880	0.875
D	G	HB	O	T
11.000	1.630	12.480	23.106	4.421
HF	HG	HH	HK	EV
20.728	26.831	11.811	6.929	1.929
H	C	LL	LM	AA
0.810	56.338	14.921	15.039	2xNPT 3"
d1				
DUNC 3/4"-10				