



No.:

Date: 11-SEP-2020

Customer :

TECHNICAL PROPOSAL

Three-phase induction motor - Squirrel cage rotor

Product line : TEFC - W22 NEMA Premium Efficiency

Catalog Number :

List Price : \$

Notes:

Performed by:

Checked:



No.:

Date: 11-SEP-2020

DATA SHEET**Three-phase induction motor - Squirrel cage rotor**

Customer :
Product line : TEFC - W22 NEMA Premium Efficiency

Frame : 586/7T
Output : 450 HP
Frequency : 60 Hz
Poles : 4
Full load speed : 1790 rpm
Slip : 0.56 %
Voltage : 208-230/460 V
Rated current : 1120-1010/507 A
Locked rotor current : 6490/3240 A
Locked rotor current (I_L/I_n) : 6.4
No-load current : 286/143 A
Full load torque : 1302 lb.ft
Locked rotor torque : 220 %
Breakdown torque : 210 %
Design : B
Insulation class : F
Temperature rise : 80 K
Locked rotor time : 16 s (hot)
Service factor : 1.00
Duty cycle : S1
Ambient temperature : -20°C - +40°C
Altitude : 1000 m
Degree of Protection : IP55
Approximate weight : 3640 lb
Moment of inertia : 213.23 sq.ft.lb
Noise level : 78 dB(A)

	D.E.	N.D.E.
Bearings	6322 C3	6319 C3
Regreasing interval	6000 h	8000 h
Grease amount	60 g	45 g

Load	Power factor	Efficiency (%)
100%	0.85	96.2
75%	0.83	96.2
50%	0.78	95.8

Notes:

Performed by

Checked




No.:

Date: 11-SEP-2020

PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

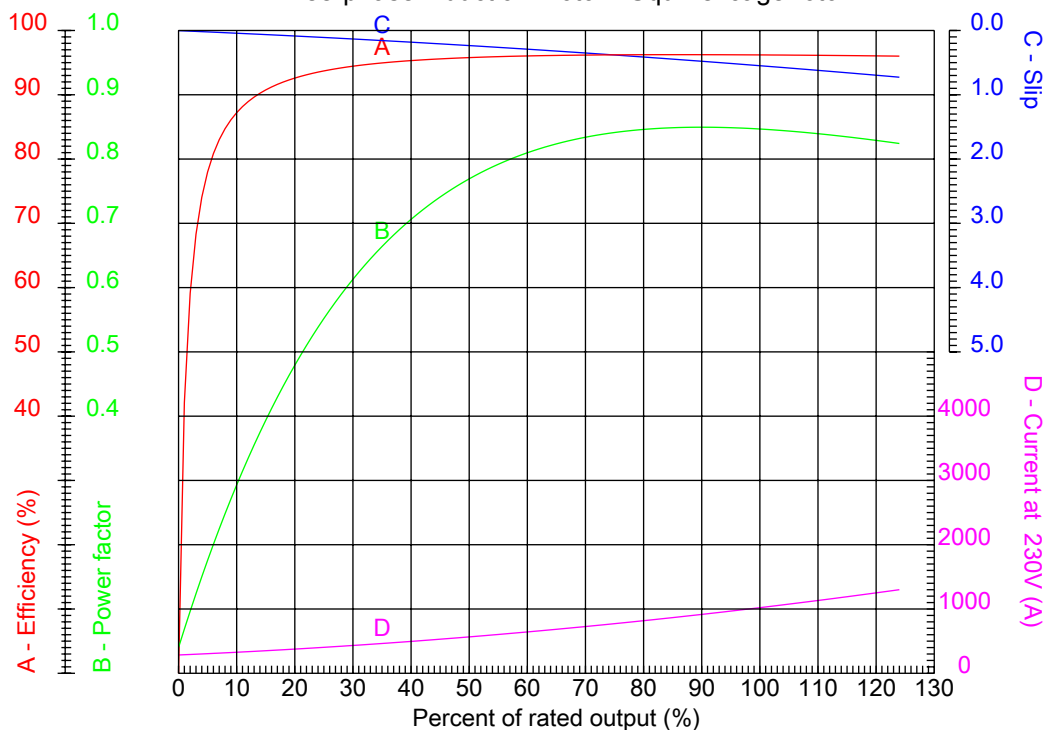

Customer :
Product line : TEFC - W22 NEMA Premium Efficiency

Frame	: 586/7T	Locked rotor current (I _L /I _n)	: 6.4
Output	: 450 HP	Duty cycle	: S1
Frequency	: 60 Hz	Service factor	: 1.00
Full load speed	: 1790 rpm	Design	: B
Voltage	: 208-230/460 V	Locked rotor torque	: 220 %
Rated current	: 1120-1010/507 A	Breakdown torque	: 210 %
Insulation class	: F		

Notes:

Performed by

Checked




No.:

Date: 11-SEP-2020

CHARACTERISTIC CURVES RELATED TO SPEED

Three-phase induction motor - Squirrel cage rotor

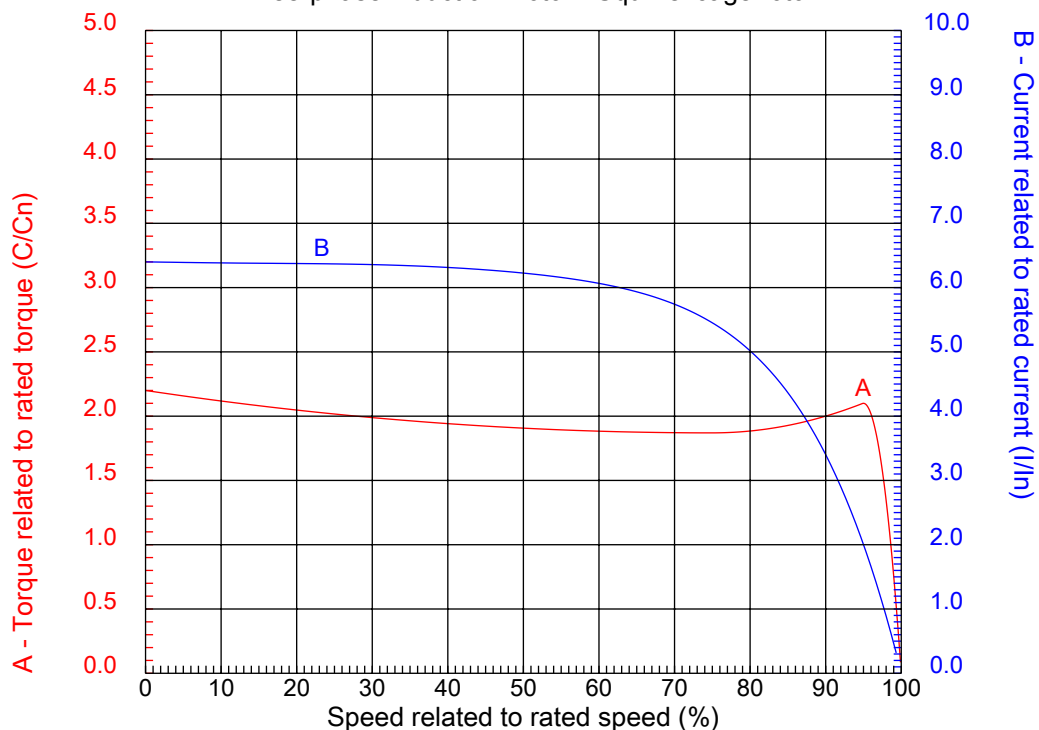


Customer :
Product line : TEFC - W22 NEMA Premium Efficiency

Frame	: 586/7T	Locked rotor current (I _L /I _n)	: 6.4
Output	: 450 HP	Duty cycle	: S1
Frequency	: 60 Hz	Service factor	: 1.00
Full load speed	: 1790 rpm	Design	: B
Voltage	: 208-230/460 V	Locked rotor torque	: 220 %
Rated current	: 1120-1010/507 A	Breakdown torque	: 210 %
Insulation class	: F		

Notes:

Performed by

Checked



Notes:		
Performed by:		
Checked:		
Customer:		
TEFC - W22 NEMA Premium Efficiency		
Three-phase induction motor Frame 586/7T - IP55	11-SEP-2020	