



No.:

Date: 11-SEP-2020

Customer :

TECHNICAL PROPOSAL

Three-phase induction motor - Squirrel cage rotor

Product line : TEFC - W22 NEMA Premium Efficiency

Catalog Number :

List Price : \$

Notes:

Performed by:

Checked:



No.:

Date: 11-SEP-2020

DATA SHEET

Three-phase induction motor - Squirrel cage rotor

Customer :
Product line : TEFC - W22 NEMA Premium Efficiency

Frame : 586/7TS
Output : 450 HP
Frequency : 60 Hz
Poles : 2
Full load speed : 3585 rpm
Slip : 0.42 %
Voltage : 575 V
Rated current : 378 A
Locked rotor current : 2540 A
Locked rotor current (I_L/I_n) : 6.7
No-load current : 72.0 A
Full load torque : 650 lb.ft
Locked rotor torque : 200 %
Breakdown torque : 230 %
Design : B
Insulation class : F
Temperature rise : 80 K
Locked rotor time : 34 s (hot)
Service factor : 1.00
Duty cycle : S1
Ambient temperature : -20°C - +40°C
Altitude : 1000 m
Degree of Protection : IP55
Approximate weight : 3918 lb
Moment of inertia : 132.33 sq.ft.lb
Noise level : 84 dB(A)

	D.E.	N.D.E.
Bearings	6314 C3	6314 C3
Regreasing interval	4000 h	4000 h
Grease amount	27 g	27 g

Load	Power factor	Efficiency (%)
100%	0.91	96.2
75%	0.90	96.2
50%	0.87	95.8

Notes:

Performed by

Checked




No.:

Date: 11-SEP-2020

PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

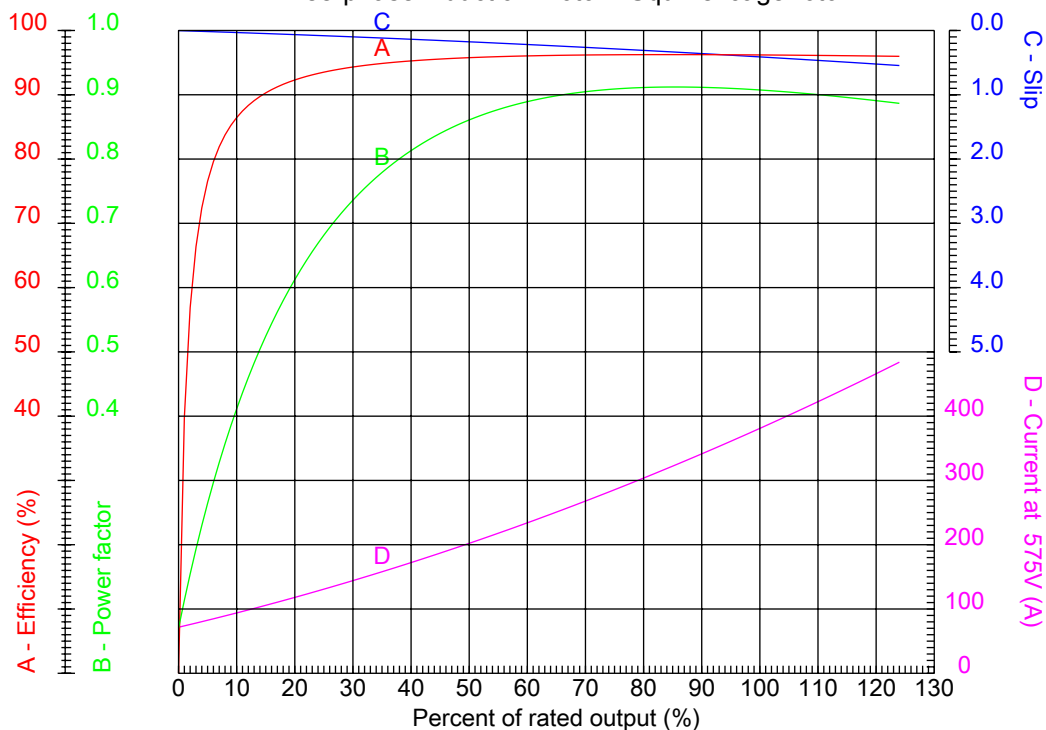

Customer :
Product line : TEFC - W22 NEMA Premium Efficiency

Frame	: 586/7TS	Locked rotor current (I _L /I _n)	: 6.7
Output	: 450 HP	Duty cycle	: S1
Frequency	: 60 Hz	Service factor	: 1.00
Full load speed	: 3585 rpm	Design	: B
Voltage	: 575 V	Locked rotor torque	: 200 %
Rated current	: 378 A	Breakdown torque	: 230 %
Insulation class	: F		

Notes:

Performed by

Checked




No.:

Date: 11-SEP-2020

CHARACTERISTIC CURVES RELATED TO SPEED

Three-phase induction motor - Squirrel cage rotor

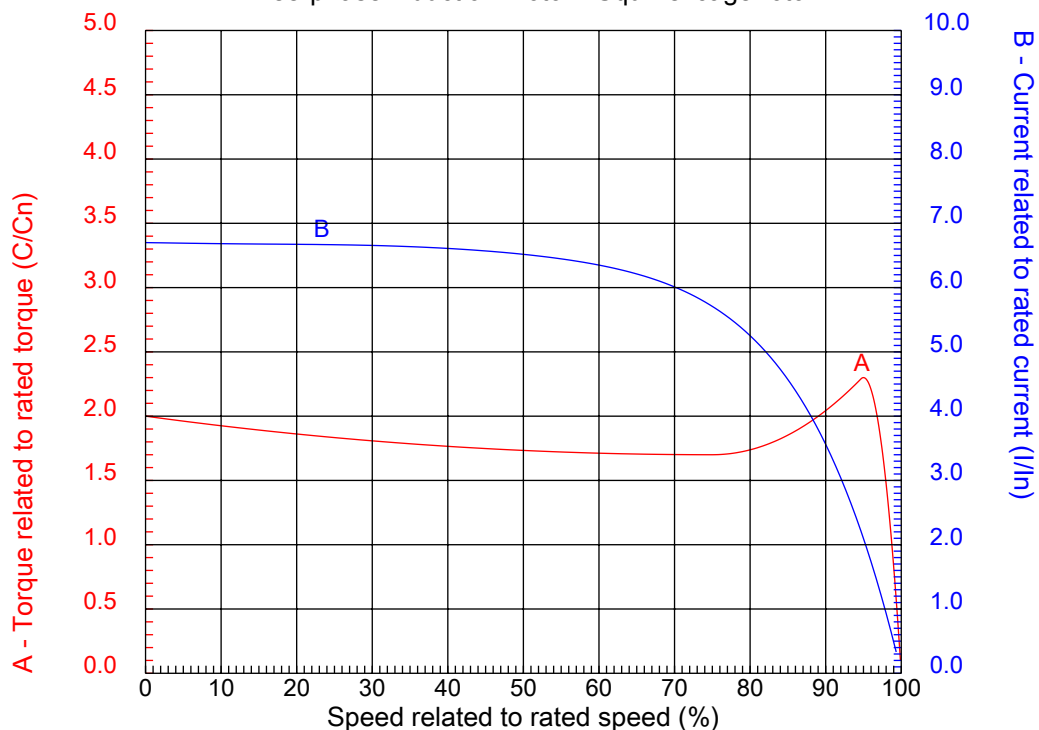


Customer :
Product line : TEFC - W22 NEMA Premium Efficiency

Frame	: 586/7TS	Locked rotor current (I _L /I _n)	: 6.7
Output	: 450 HP	Duty cycle	: S1
Frequency	: 60 Hz	Service factor	: 1.00
Full load speed	: 3585 rpm	Design	: B
Voltage	: 575 V	Locked rotor torque	: 200 %
Rated current	: 378 A	Breakdown torque	: 230 %
Insulation class	: F		

Notes:

Performed by

Checked

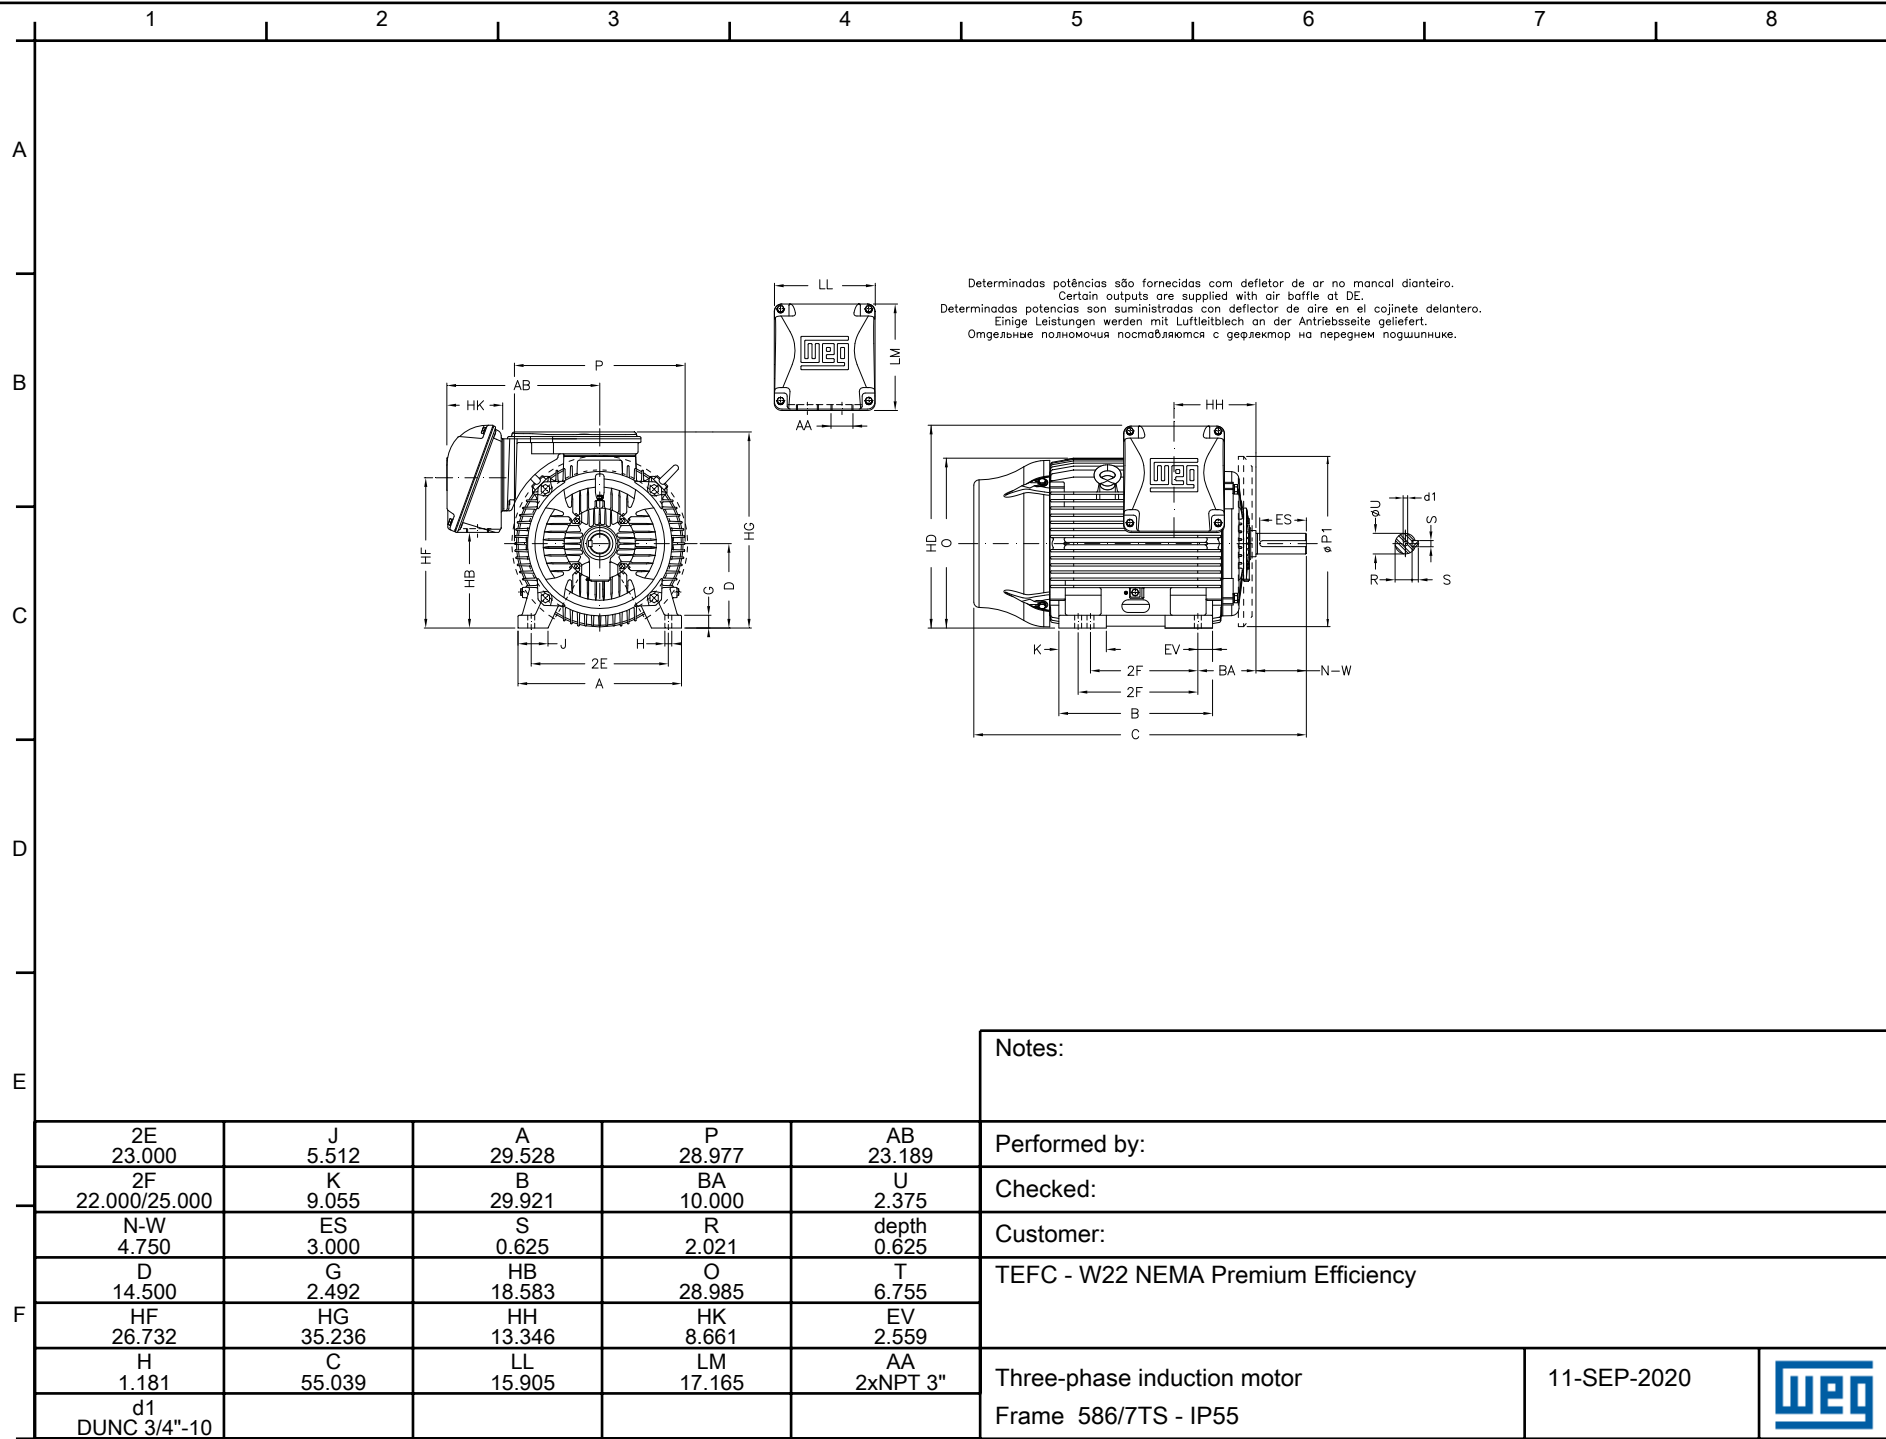

D

14.500

G

2.492

HB

18.583

O

28.985

T

6.755

HF

26.732

HG

35.236

HH

13.346

HK

8.661

EV

2.559

H

1.181

C

55.039

LL

15.905

LM

17.165

AA

2xNPT 3"

d1

DUNC 3/4"-10

Three-phase induction motor

Frame 586/7TS - IP55

11-SEP-2020