



No.:

Date: 31-AUG-2020

Customer :

## TECHNICAL PROPOSAL

## Three-phase induction motor - Squirrel cage rotor

Product line : TEFC - W22 NEMA Premium Efficiency

Catalog Number :

List Price : \$

Notes:

Performed by:

Checked:



No.:

Date: 31-AUG-2020

**DATA SHEET****Three-phase induction motor - Squirrel cage rotor**

Customer :  
Product line : TEFC - W22 NEMA Premium Efficiency

Frame : 586/7T  
Output : 500 HP  
Frequency : 60 Hz  
Poles : 6  
Full load speed : 1192 rpm  
Slip : 0.67 %  
Voltage : 208-230/460 V  
Rated current : 1330-1210/603 A  
Locked rotor current : 7240/3620 A  
Locked rotor current (I<sub>L</sub>/I<sub>n</sub>) : 6.0  
No-load current : 480/240 A  
Full load torque : 2173 lb.ft  
Locked rotor torque : 200 %  
Breakdown torque : 210 %  
Design : ---  
Insulation class : F  
Temperature rise : 80 K  
Locked rotor time : 25 s (hot)  
Service factor : 1.00  
Duty cycle : S1  
Ambient temperature : -20°C - +40°C  
Altitude : 1000 m  
Degree of Protection : IP55  
Approximate weight : 4403 lb  
Moment of inertia : 367.54 sq.ft.lb  
Noise level : 77 dB(A)

|                     | D.E.    | N.D.E.  |
|---------------------|---------|---------|
| Bearings            | 6322 C3 | 6319 C3 |
| Regreasing interval | 11000 h | 13000 h |
| Grease amount       | 60 g    | 45 g    |

| Load | Power factor | Efficiency (%) |
|------|--------------|----------------|
| 100% | 0.80         | 96.2           |
| 75%  | 0.76         | 96.2           |
| 50%  | 0.66         | 95.8           |

Notes:

Performed by

Checked




No.:

Date: 31-AUG-2020

## PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

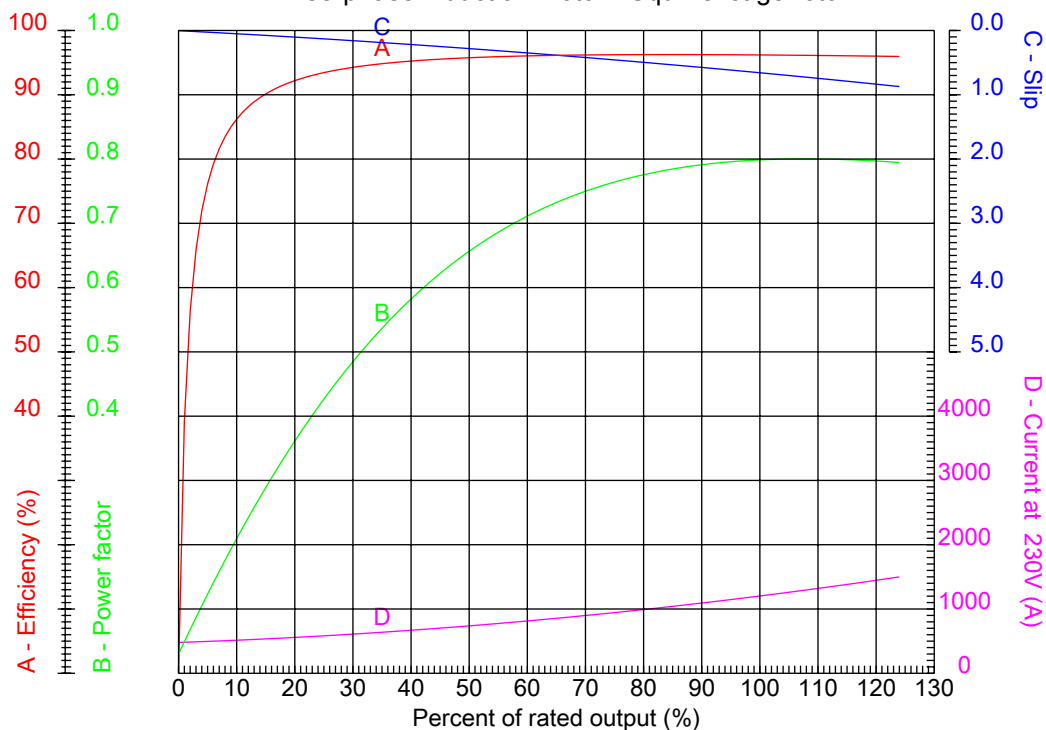

Customer :  
Product line : TEFC - W22 NEMA Premium Efficiency

|                  |                   |                                                        |         |
|------------------|-------------------|--------------------------------------------------------|---------|
| Frame            | : 586/7T          | Locked rotor current (I <sub>L</sub> /I <sub>n</sub> ) | : 6.0   |
| Output           | : 500 HP          | Duty cycle                                             | : S1    |
| Frequency        | : 60 Hz           | Service factor                                         | : 1.00  |
| Full load speed  | : 1192 rpm        | Design                                                 | : ---   |
| Voltage          | : 208-230/460 V   | Locked rotor torque                                    | : 200 % |
| Rated current    | : 1330-1210/603 A | Breakdown torque                                       | : 210 % |
| Insulation class | : F               |                                                        |         |

Notes:

Performed by

Checked




No.:

Date: 31-AUG-2020

## CHARACTERISTIC CURVES RELATED TO SPEED

Three-phase induction motor - Squirrel cage rotor

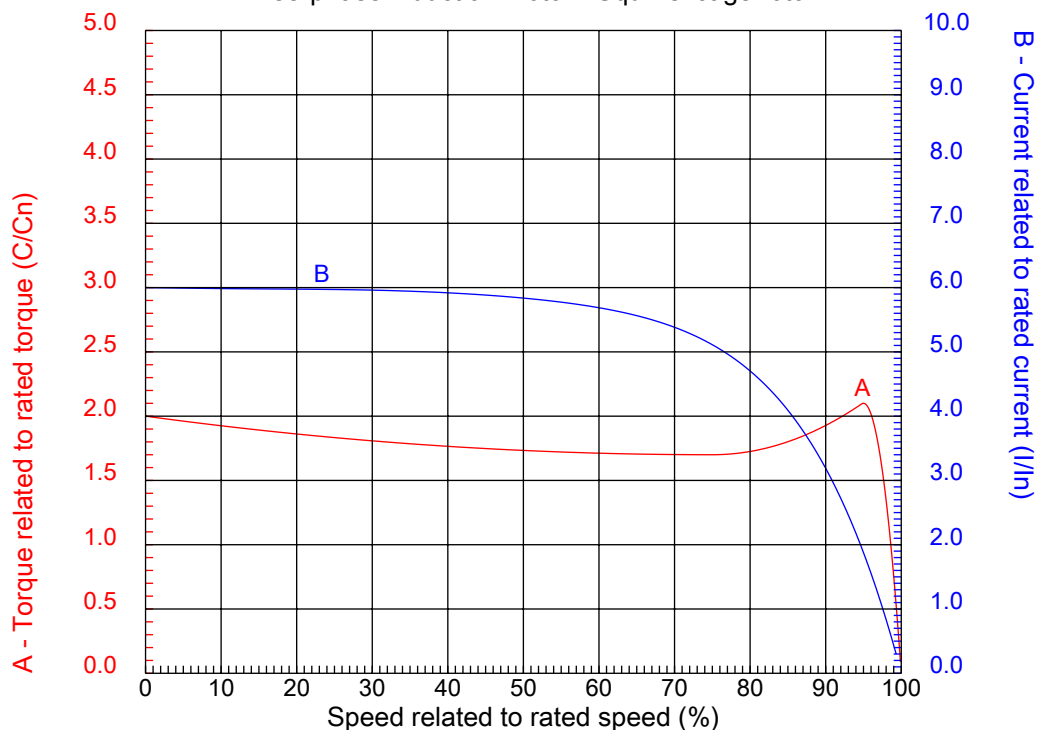


Customer :  
Product line : TEFC - W22 NEMA Premium Efficiency

|                  |                   |                                                        |         |
|------------------|-------------------|--------------------------------------------------------|---------|
| Frame            | : 586/7T          | Locked rotor current (I <sub>L</sub> /I <sub>n</sub> ) | : 6.0   |
| Output           | : 500 HP          | Duty cycle                                             | : S1    |
| Frequency        | : 60 Hz           | Service factor                                         | : 1.00  |
| Full load speed  | : 1192 rpm        | Design                                                 | : ---   |
| Voltage          | : 208-230/460 V   | Locked rotor torque                                    | : 200 % |
| Rated current    | : 1330-1210/603 A | Breakdown torque                                       | : 210 % |
| Insulation class | : F               |                                                        |         |

Notes:

Performed by

Checked



|                                                    |             |                                                                                       |
|----------------------------------------------------|-------------|---------------------------------------------------------------------------------------|
| Notes:                                             |             |                                                                                       |
| Performed by:                                      |             |                                                                                       |
| Checked:                                           |             |                                                                                       |
| Customer:                                          |             |                                                                                       |
| TEFC - W22 NEMA Premium Efficiency                 |             |                                                                                       |
| Three-phase induction motor<br>Frame 586/7T - IP55 | 31-AUG-2020 |  |