

EEL BATTERY

产品手册

PRODUCT MANUALS

Easy. Energy. Life

1

深圳市鑫力能电子有限公司

SHENZHEN EEL BATTERY CO.,LTD

地址：广东省深圳市龙岗区横岗街道银信中心E座1403室

Add:Room 1403,Yinxin Center E Block,Henggang Street,Longgang District,
Shenzhen,Guangdong,China.



深圳市鑫力能电子有限公司

SHENZHEN EEL BATTERY CO.,LTD

Shenzhen EEL Battery Co., Ltd. is a high-tech enterprise specialized in R&D, manufacturing and sales of lithium&LiFePO4 battery products. After 10 years of rapid development, EEL has accumulated core technology and comprehensive solution for power battery products, meanwhile, we have obtained the approval and praise of customers from all over the world.

Most of our battery models have MSDS, UN38.3, CE, UL1642 certificates. Depending on professional R&D engineers, enthusiastic sales team and reliable after-sales service, our battery products are widely used in the field of off-grid solar power system, solar street light, RV, electric vehicles, golf cart, power tool, backup power, medical device. Our goal is to provide competitive, safe and superior battery products for customers, we also pay attention to environmental protection and take social responsibility, encourage people to use green new energy. Believe in us, EEL will be your trustworthy partner in battery business!



企业简介 COMPANY INFO

ENERGY STORAGE

LiFePO4 BATTERY CELLS

A New Energy Storage Battery Cells
— for solar, RV, Marine, Golf cart, off-grid System




We need battery solutions that have greater capacity, a high power potential, a longer lifespan, are sustainable, safe, and fit into the needs and wants of today's conscientious consumers.

As technology has advanced, a new winner in the race for energy storage solutions has emerged: lithium iron phosphate battery (LiFePO4). EEL designs, supplies, and delivers raw lifepo4 battery cells and complete solar energy systems for homeowners, business programs, and installers. We use only the highest-rated manufacturers in our design layouts, such as EVE, and CATL. We have a commitment to excellence for our valued customers, offering wholesale pricing that ensures a powerful return on investment.

Regular Battery Cells(EVE)




EVE 100Ah(M6 studs)	
Nominal capacity	100Ah
Operate voltage	2.5-3.65V (-15~55℃)
Internal resistance	≤0.25mΩ
Operating temperature(charge)	0~55℃
Operating temperature(discharge)	-20~55℃
Cycle life	≥4000 times
Weight	2.10±0.3kg
Size	160*115*50mm

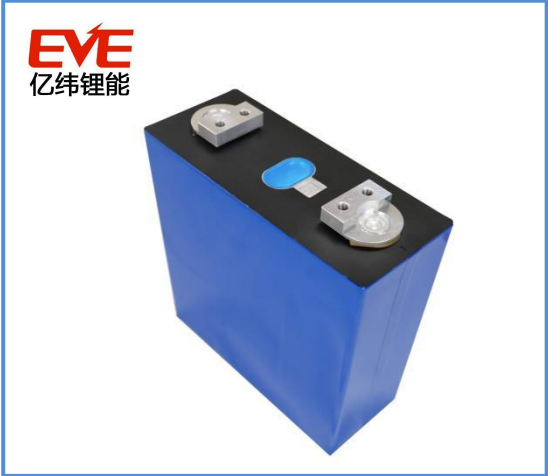

EVE 304Ah (M6 &Double hole studs)	
Nominal capacity	304-320Ah
Operate voltage	2.5-3.65V (-15~55℃)
Internal resistance	≤0.25mΩ
Operating temperature(charge)	0~55℃
Operating temperature(discharge)	-20~55℃
Cycle life	≥6000 times
Weight	5.42±0.3kg
Size	207*174*72mm




EVE 230Ah(M6 studs)	
Nominal capacity	230Ah
Operate voltage	2.5-3.65V (-15~55℃)
Internal resistance	≤0.3mΩ
Operating temperature(charge)	0~60℃
Operating temperature(discharge)	-30~60℃
Cycle life	≥4000 times
Weight	4.11±0.2kg
Size	174*210*54mm

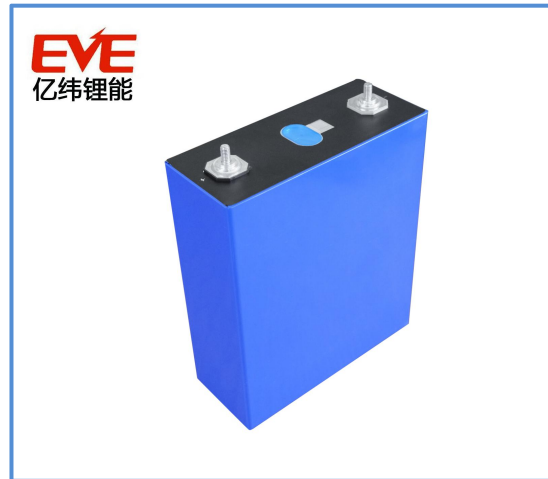

EVE 306 MB30 (M6 &Double hole studs)	
Nominal capacity	306-320Ah
Operate voltage	2.5-3.65V (-15~55℃)
Internal resistance	≤0.20mΩ
Operating temperature(charge)	0~55℃
Operating temperature(discharge)	-20~55℃
Cycle life	≥10000 times
Weight	5.52±0.3kg
Size	208*174*72mm




EVE280K V3 (M6 &Double hole studs)	
Nominal capacity	280Ah
Operate voltage	2.5-3.65V (-15~55℃)
Internal resistance	≤0.25mΩ
Operating temperature(charge)	0~55℃
Operating temperature(discharge)	-20~55℃
Cycle life	≥4000 times
Weight	5.42±0.3kg
Size	208*174*72mm

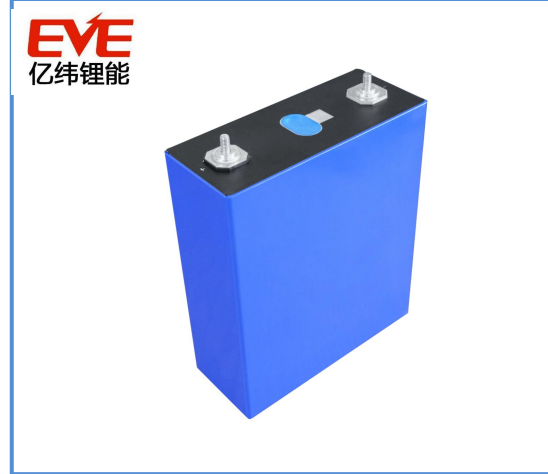

EVE 314 MB31 (M6 &Double hole studs)	
Nominal capacity	320-330Ah
Operate voltage	2.5-3.65V (-15~55℃)
Internal resistance	≤0.2mΩ
Operating temperature(charge)	0~55℃
Operating temperature(discharge)	-20~55℃
Cycle life	≥10000 times
Weight	5.62±0.3kg
Size	208*174*72mm

Regular Battery Cells(CATL)

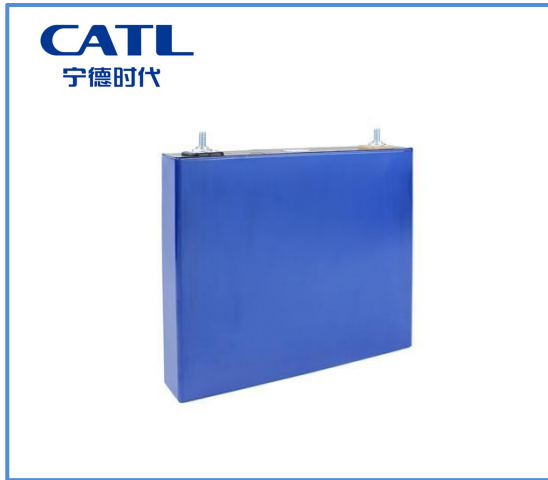

CATL 100Ah (M6 studs)	
Nominal capacity	100Ah
Operate voltage	2.5-3.65V (-15~55℃)
Internal resistance	≤0.3mΩ
Operating temperature(charge)	0~60℃
Operating temperature(discharge)	-30~60℃
Cycle life	≥4000 times
Weight	2.10±0.2kg
Size	173*200*33mm



CATL 302Ah(M6 studs)	
Nominal capacity	302Ah
Operate voltage	2.5-3.65V (-15~55℃)
Internal resistance	≤0.25mΩ
Operating temperature(charge)	0~55℃
Operating temperature(discharge)	-20~55℃
Cycle life	≥10000 times
Weight	5.42±0.3kg
Size	207*174*72mm




CATL 228Ah(M6 studs)	
Nominal capacity	228Ah
Operate voltage	2.5-3.65V (-15~55℃)
Internal resistance	≤0.3mΩ
Operating temperature(charge)	0~60℃
Operating temperature(discharge)	-30~60℃
Cycle life	≥4000 times
Weight	4.11±0.2kg
Size	174*223*54mm



CATL 306Ah(M6 studs)	
Nominal capacity	320Ah
Operate voltage	2.5-3.65V (-15~55℃)
Internal resistance	≤0.25mΩ
Operating temperature(charge)	0~55℃
Operating temperature(discharge)	-20~55℃
Cycle life	≥10000 times
Weight	5.42±0.3kg
Size	207*174*72mm



CATL 280Ah(M6 studs)	
Nominal capacity	280Ah
Operate voltage	2.5-3.65V (-15~55℃)
Internal resistance	≤0.25mΩ
Operating temperature(charge)	0~55℃
Operating temperature(discharge)	-20~55℃
Cycle life	≥10000 times
Weight	5.42±0.3kg
Size	207*174*72mm

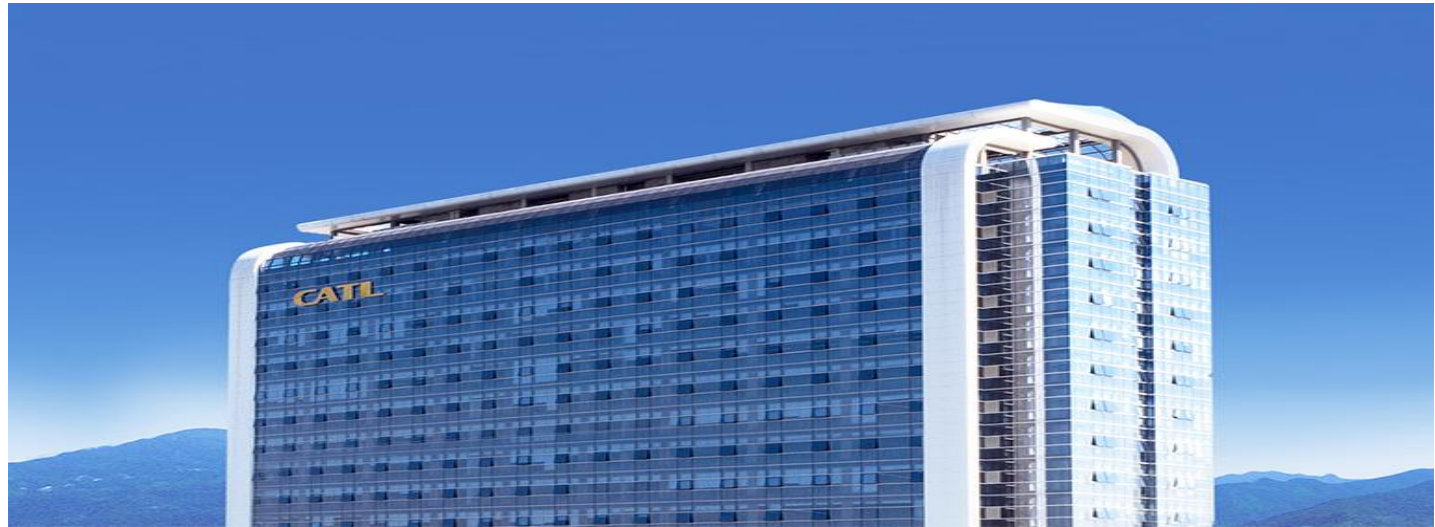

12V LiFePO4 Battery Pack

A New DIY Energy Storage Solution
—for solar,RV,Marine,Golf cart,off-grid System

EEL V2 12V-BOX

CNL FUSE

PCB BOARD

JK BMS

TEMP SENSOR

TERMINALS



EEL-Venu 12V 230Ah

Nominal voltage	12.8V
Support capacity	228/230Ah
Recommended charge voltage	14.6V
Discharging cut-off voltage	10V
Recommended charge current	20A
Recommended discharge current	100A
Active balance current	1A/2A
Cycle life	4000 times,DOD 80%
Operate temperature	Charge: -10~45℃ Discharge: -20~60℃
Size	309*190*264mm




EEL-Jupiter 12V 280/330Ah

Nominal voltage	12.8V
Support capacity	280-330Ah
Recommended charge voltage	14.4V
Discharging cut-off voltage	10V
Recommended charge current	100A
Recommended discharge current	100A
Active balance current	1A/2A
Cycle life	6000 times,DOD 80%
Operate temperature	Charge: -10~45℃ Discharge: -20~60℃
Size	395*220*250mm



24V LiFePO4 Battery Pack

A New DIY Energy Storage Solution
for solar,RV,Marine,Golf cart,off-grid System

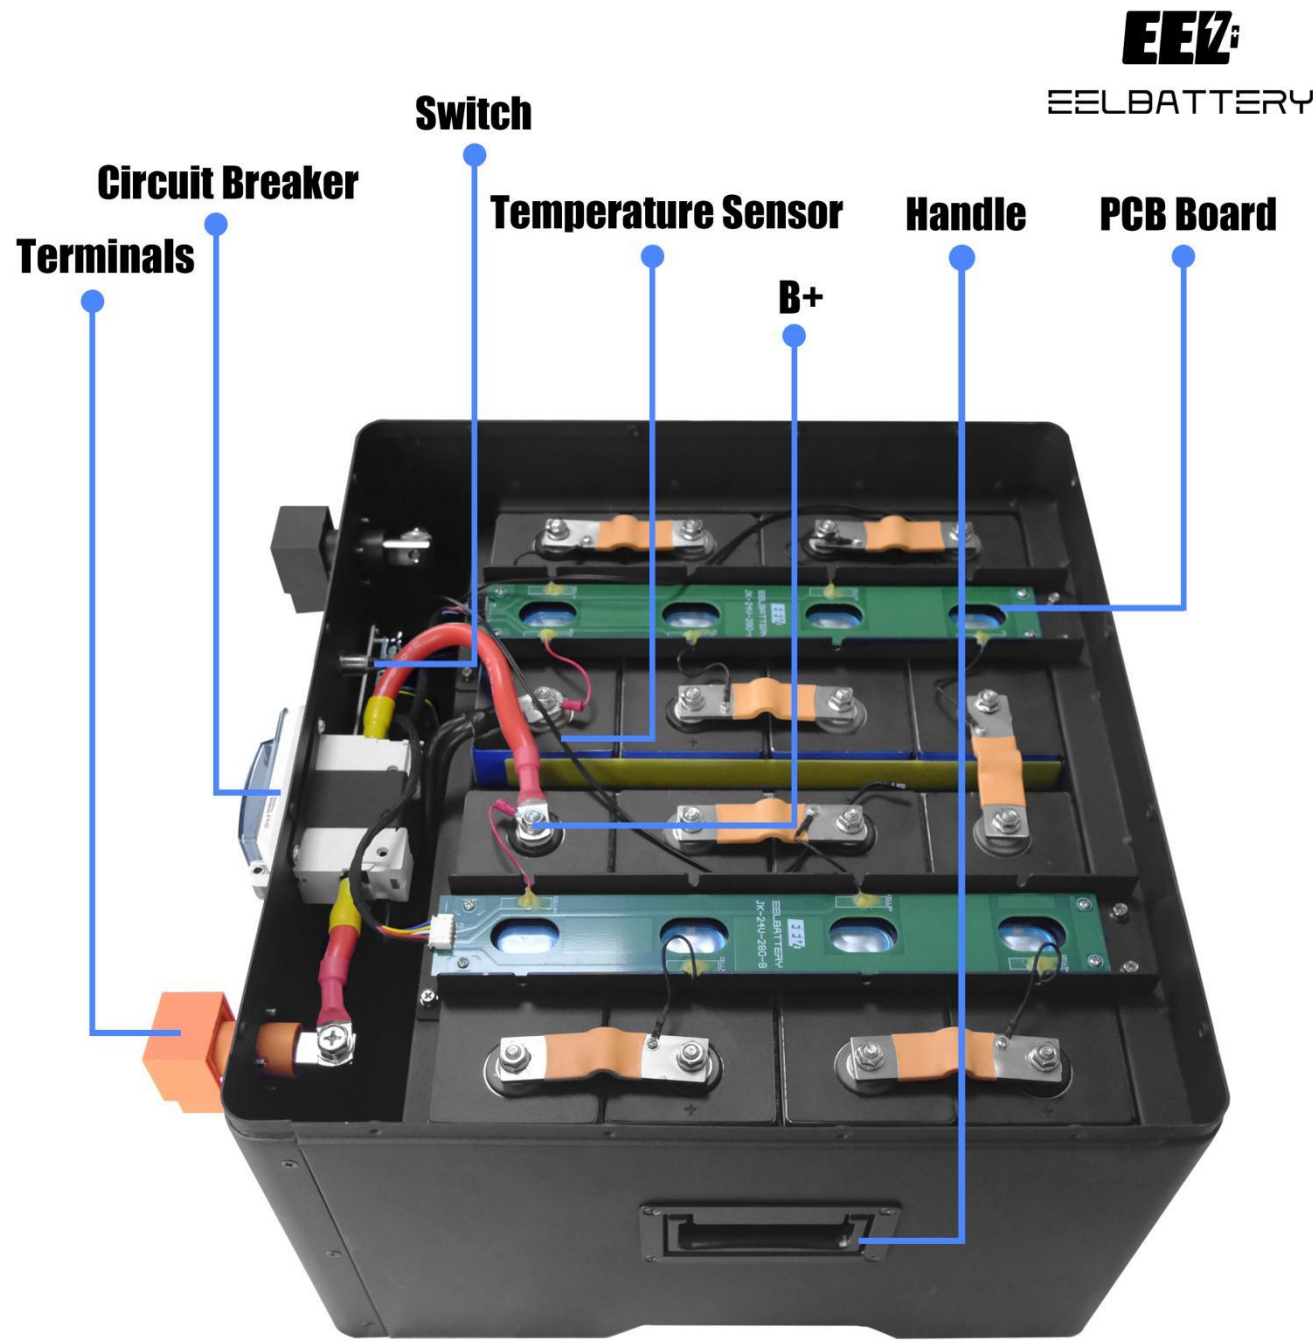

EEL 24V 230Ah	
Nominal voltage	25.6V
Support capacity	228/230Ah
Recommended charge voltage	29.2V
Discharging cut-off voltage	20V
Recommended charge current	100A
Recommended discharge current	200A
Active balance current	1A/2A
Cycle life	6000 times,DOD 80%
Operate temperature	Charge: -10~45℃
	Discharge: -20~60℃
Size	420*190*246mm




EEL 24V 280/330Ah	
Nominal voltage	25.6V
Support capacity	280-330Ah
Recommended charge voltage	29.2V
Discharging cut-off voltage	20V
Recommended charge current	200A
Recommended discharge current	200A
Active balance current	1A/2A
Cycle life	6000 times,DOD 80%
Operate temperature	Charge: -10~45℃
	Discharge: -20~60℃
Size	420*396*246mm



48V LiFePO4 Battery Box Kit

A New DIY Battery Energy Storage Solution
——Server Rack V3 Box

EEL V3 48V-BOX

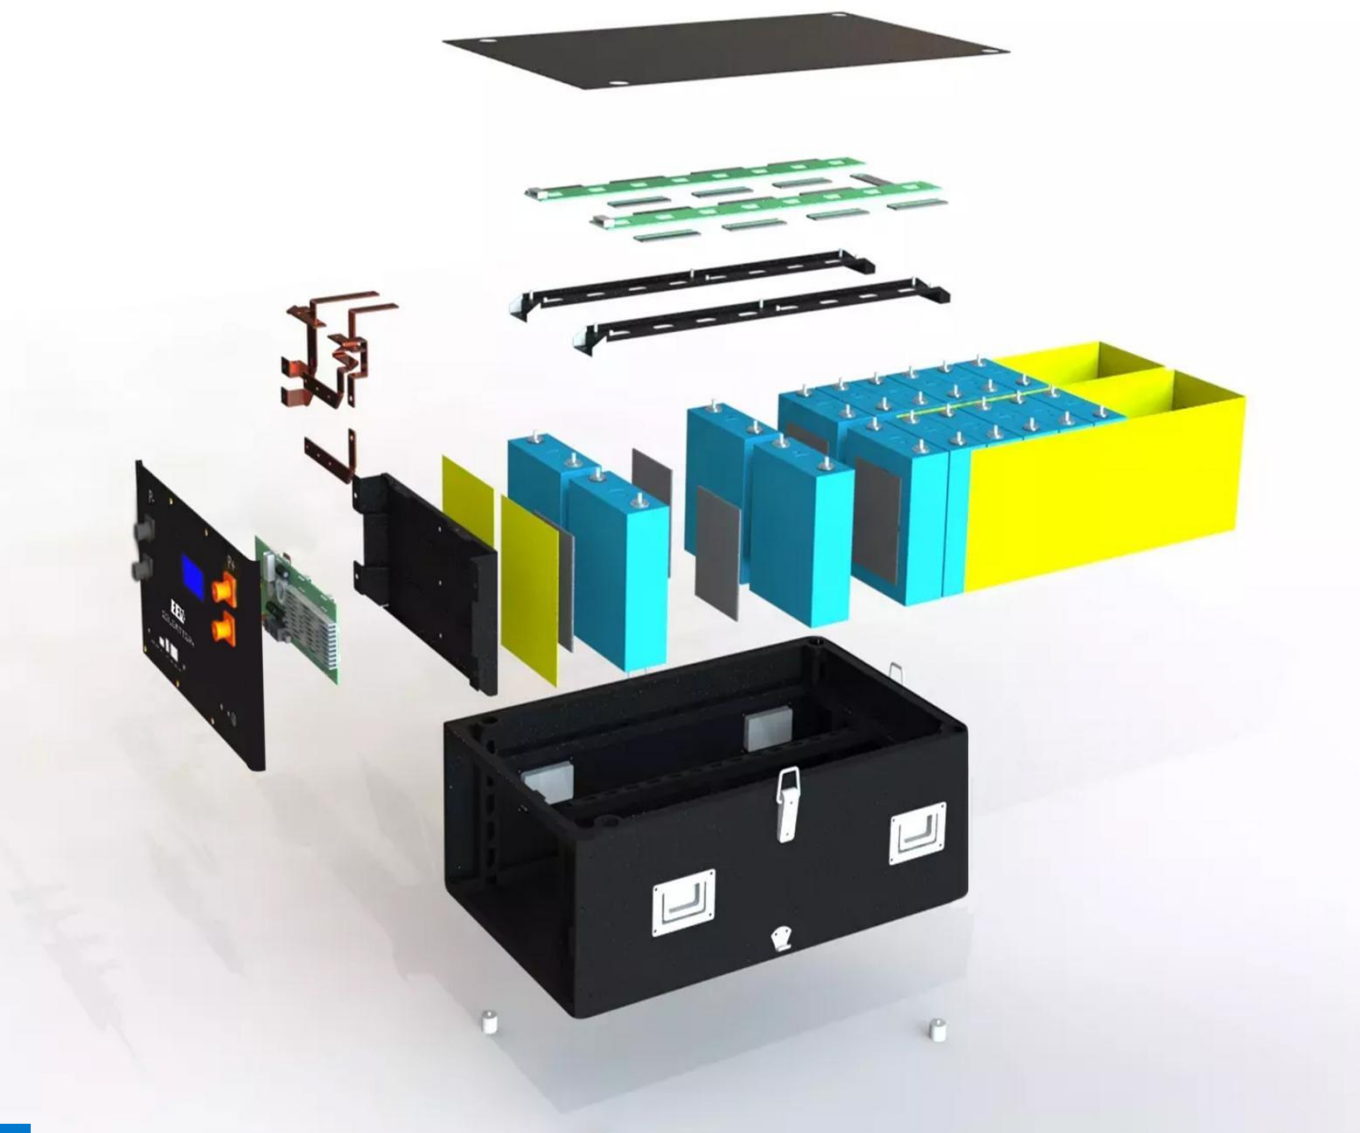


EEL-Server Rack V3 Box(230AH)	
Nominal voltage	51.2V
Support battery capacity	230Ah/202Ah/200Ah
Terminal	2 positive & 2 negative
BMS Continuous Current	100A/150A/200A
Communication	RS485/CAN
Support Bluetooth	Yes
One Stop Switch	Yes
Stackable batteries	Up to 15 parallel modules
Operate temperature	Charge: -10~45℃
	Discharge: -20~60℃
Size	410*550*260mm



EEL-Server Rack V3 Box(280AH)	
Nominal voltage	51.2V
Support battery capacity	280-330Ah
Terminal	2 positive & 2 negative
BMS Continuous Current	100A/150A/200A
Communication	RS485/CAN
Support Bluetooth	Yes
One Stop Switch	Yes
Stackable batteries	Up to 15 parallel modules
Operate temperature	Charge: -10~45℃
	Discharge: -20~60℃
Size	410*680*260mm

A New DIY Battery Energy Storage Solution ——Server Rack V4 Box


48V EEL DIY LIFEPO4 BATTERY WITH JK INVERTER BMS

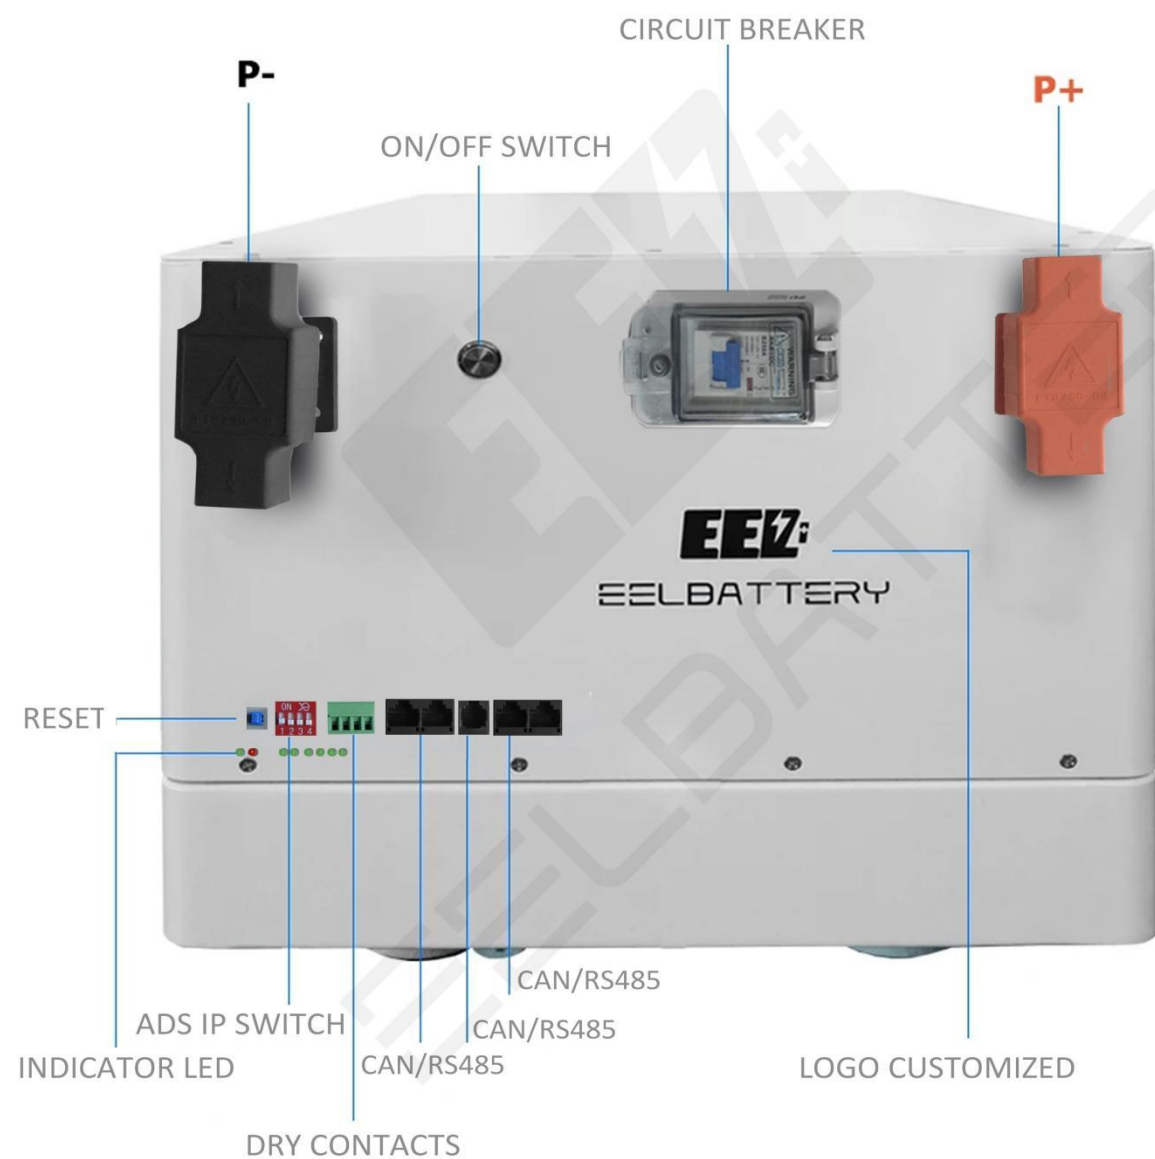


EEL-Server Rack V4 Box(230Ah)	
Nominal voltage	51.2V
Support battery capacity	200Ah-230Ah
Terminal	1 positive & 1 negative
BMS Type	100A/150A/200A EEL BMS
Communication	RS485/CAN
Support Bluetooth/Circuit breaker	Yes
Color Option	White/Black
Active Balance Current	With 4A Balancer
Operate temperature	Charge: -10~45℃
	Discharge: -20~60℃
Size	410*550*260mm



EEL-Server Rack V4 Box(280Ah)	
Nominal voltage	51.2V
Support battery capacity	280Ah-330Ah
Terminal	1 positive & 1 negative
BMS Type	100A/150A/200A EEL BMS
Communication	RS485/CAN
Support Bluetooth/Circuit breaker	Yes
Color Option	White/Black
Active Balance Current	With 4A Balancer
Operate temperature	Charge: -10~45℃
	Discharge: -20~60℃
Size	410*680*260mm

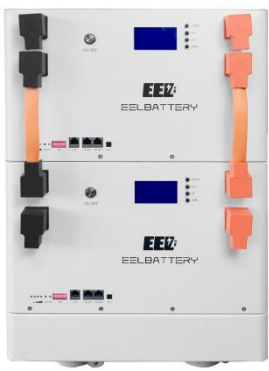

A New DIY Battery Energy Storage Solution
——Server Rack JK Box

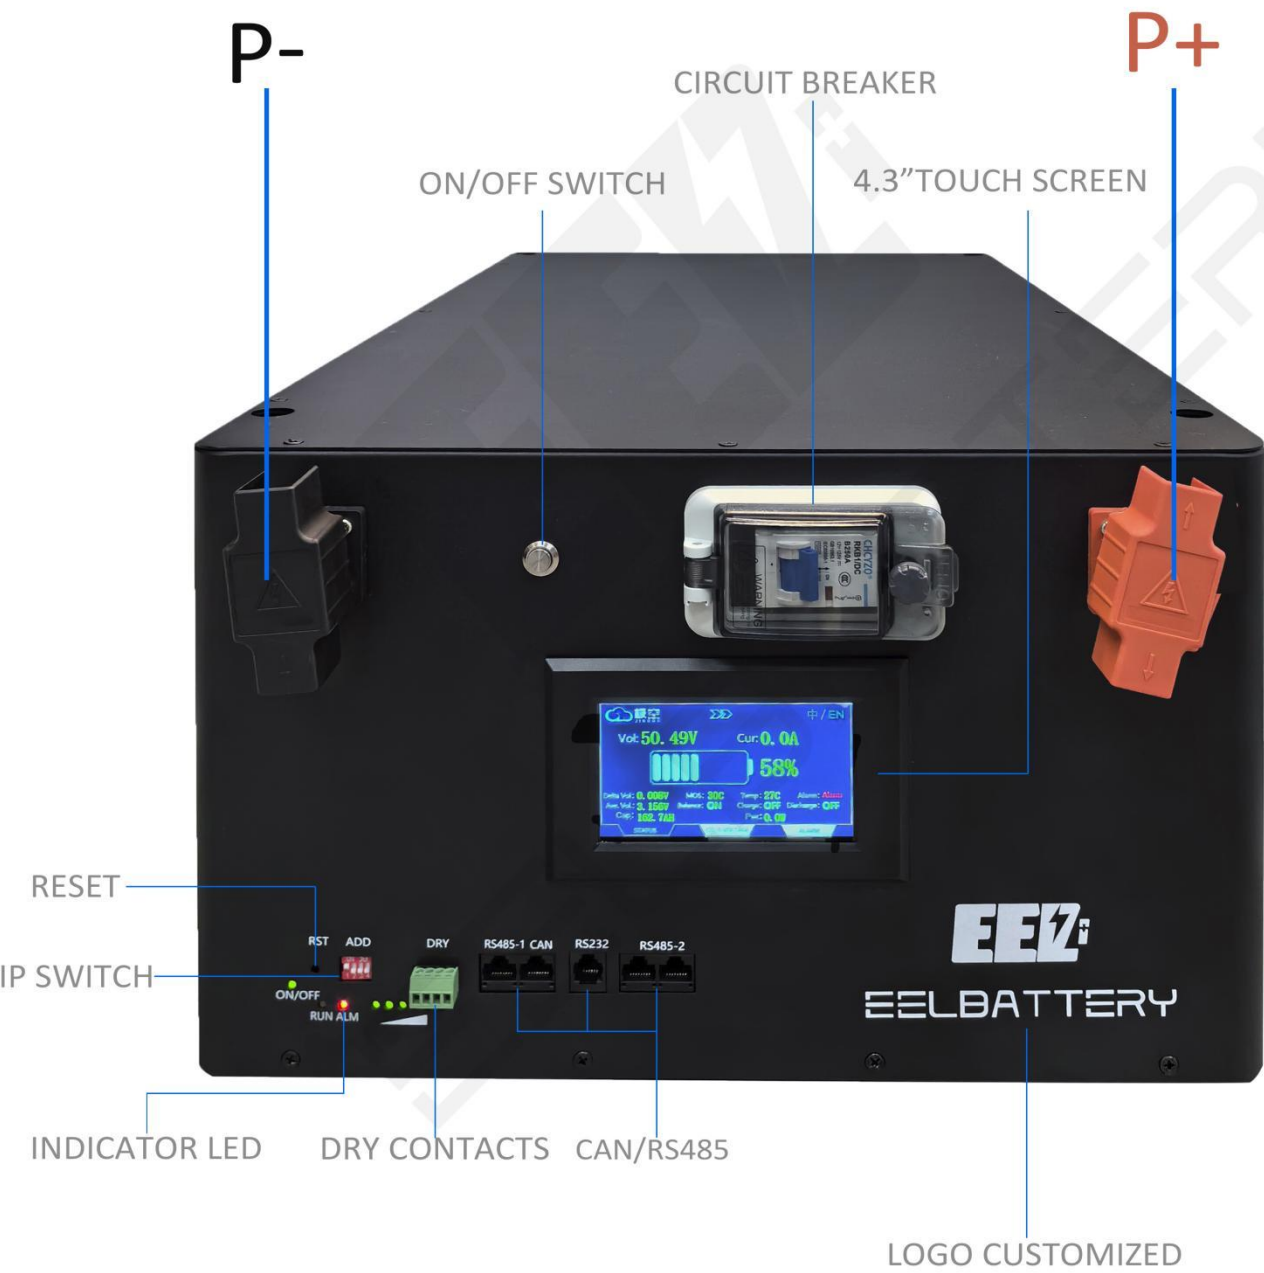


EEL-Server Rack V4 Box(JK BMS)	
Nominal voltage	51.2V
Support battery capacity	230-330Ah
Terminal	1 positive & 1 negative
BMS Type	JK 150A/200A
Communication	RS485/CAN
Support Bluetooth	Yes
One Stop Switch	Yes
Active Balance Current	2A
Operate temperature	Charge: -10~45℃
	Discharge: -20~60℃
Size	410*550*260mm



EEL-Server Rack V4 Display Box(JK BMS)	
Nominal voltage	51.2V
Support battery capacity	230-330Ah
Terminal	1 positive & 1 negative
BMS Type	JK 150A/200A
Communication	RS485/CAN
Support Bluetooth	Yes
One Stop Switch/Display	Yes
Active Balance Current	2A
Operate temperature	Charge: -10~45℃
	Discharge: -20~60℃
Size	410*550*260mm

A New DIY Battery Energy Storage Solution ——Standing Box

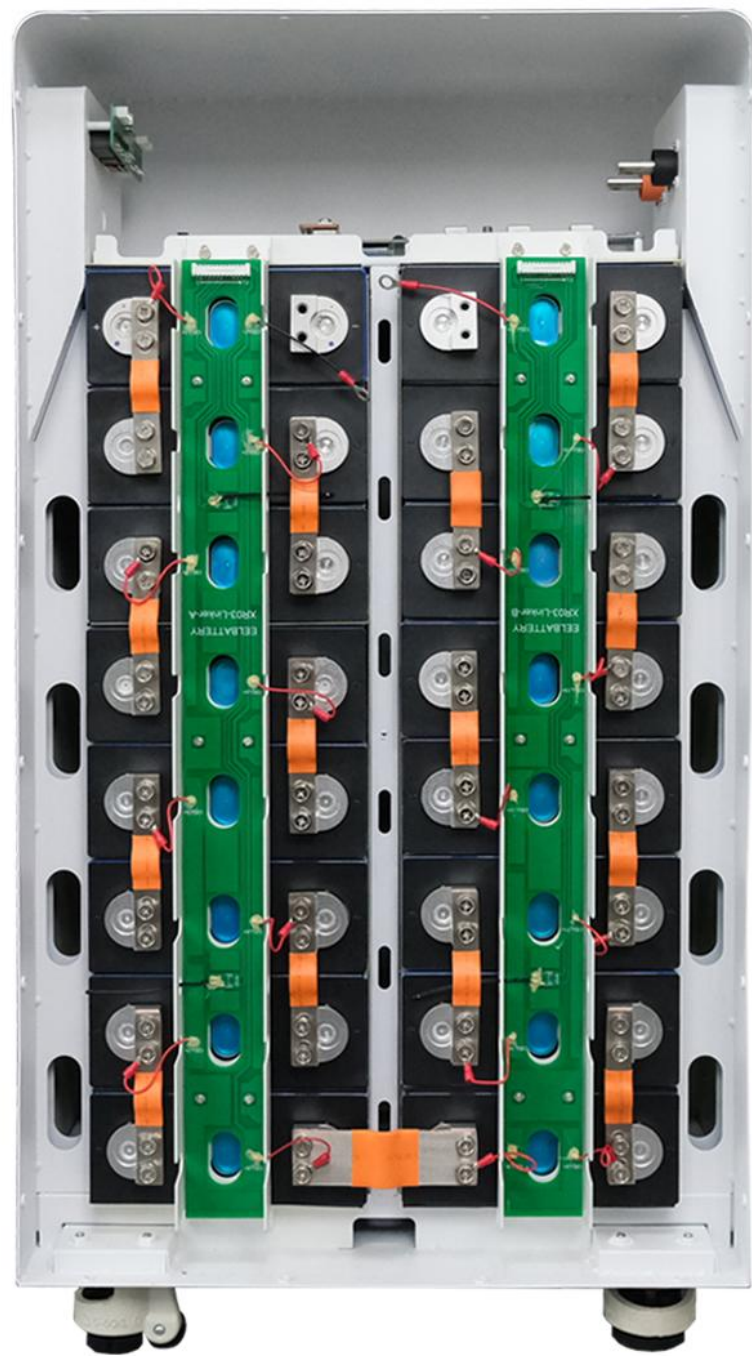

EEL-Server Rack Box(230AH)	
Nominal voltage	51.2V
Support battery capacity	230Ah/202Ah/200Ah
Terminal	2 positive & 2 negative
BMS Continuous Current	100A/150A/200A
Communication	RS485/CAN
Support Bluetooth	Yes
One Stop Switch	Yes
Parallel batteries	Up to 15 parallel modules
Operate temperature	Charge: -10~45℃
	Discharge: -20~60℃
Size(L*W*H)	450*270*685mm



EEL-Server Rack Box(230AH)	
Nominal voltage	51.2V
Support battery capacity	280-330Ah
Terminal	2 positive & 2 negative
BMS Continuous Current	100A/150A/200A
Communication	RS485/CAN
Support Bluetooth	Yes
One Stop Switch	Yes
Parallel batteries	Up to 15 parallel modules
Operate temperature	Charge: -10~45℃
	Discharge: -20~60℃
Size(L*W*H)	450*270*825mm



A New DIY Battery Energy Storage Solution
——Standing V2 JK Box




EEL-Server Rack Box(230)	
Nominal voltage	51.2V
Support battery capacity	230Ah/202Ah/200Ah
Active Balance Current	2A
BMS Continuous Current	150A/200A
Communication	RS485/CAN
Support Bluetooth	Yes
One Stop Switch	Yes
Parallel batteries	Up to 15 parallel modules
Operate temperature	Charge: -10~45℃
	Discharge: -20~60℃
Size	450*270*685mm



EEL-Server Rack Box(280)	
Nominal voltage	51.2V
Support battery capacity	280-330Ah
Active Balance Current	2A
BMS Continuous Current	150A/200A
Communication	RS485/CAN
Support Bluetooth	Yes
One Stop Switch	Yes
Parallel batteries	Up to 15 parallel modules
Operate temperature	Charge: -10~45℃
	Discharge: -20~60℃
Size	450*270*685mm



A New DIY Battery Energy Storage Solution ——Power Wall Type



48V 230Ah Case	
Nominal voltage	51.2V
Support battery capacity	230Ah/202Ah/200Ah
Terminal	2 positive & 2 negative
BMS Continuous Current	100A/150A/200A
Communication	RS485/CAN
Support Bluetooth	Yes
One Stop Switch	Yes
Parallel batteries	Up to 15 parallel modules
Operate temperature	Charge: -10~45℃
	Discharge: -20~60℃
Size	410*550*260mm



48V 280/302Ah Case	
Nominal voltage	51.2V
Support battery capacity	280-330Ah
Terminal	2 positive & 2 negative
BMS Continuous Current	100A/150A/200A
Communication	RS485/CAN
Support Bluetooth	Yes
One Stop Switch	Yes
Parallel batteries	Up to 15 parallel modules
Operate temperature	Charge: -10~45℃
	Discharge: -20~60℃
Size	410*680*260mm

Battery Protection Board




JK BMS Sliver	
Continuous current	40-150A
Max current	60-200A
Series	4-24S
Active balance current	0.6-1A
Over-charge protection voltage	1.2-4.35V
Charging over-current	10-100A
Interface	RS485
Bluetooth	With Bluetooth
Operate temperature	-20~70℃ Temperature Protection
Size	136*83*17.6mm



JK BMS Black	
Continuous current	150-200A
Max current	300-350A
Series	8-24S
Active balance current	1-2A
Over-charge protection voltage	1.2-4.35V
Charging over-current	10-100A
Interface	RS485/CAN
Bluetooth	With Bluetooth
Operate temperature	-20~70℃ Temperature Protection
Size	162*102*20.4mm



EEL BMS	
Continuous current	100-200A
Pre-charging	0-3000ms
Series	4-24S
Active balance current	Passive balance:150mA(Max)
Over voltage protection	3650mV
Over current protection	60A/85A/110/160A/210A
Interface	RS485/CAN
Function	Heating function、 External switch
Operate temperature	-20~70℃ Temperature Protection
Size	300*100*30mm/260*80*25 mm

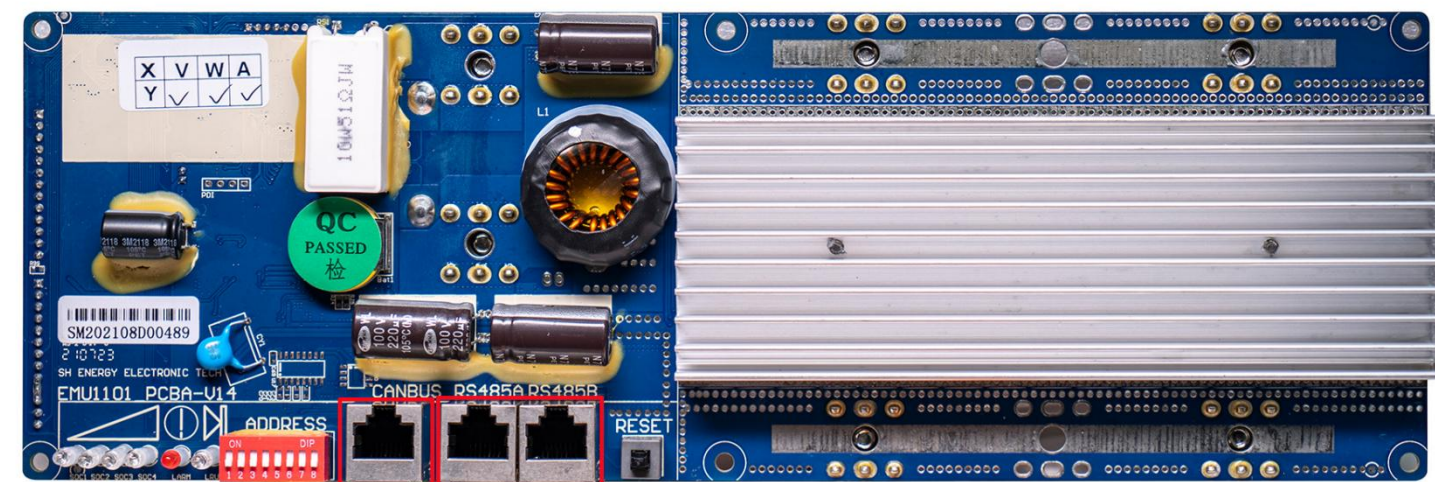

CANBUS

Communication between battery and inverters
Baud rate:500kbps

RS485 Interface

Communication between parallel packs or BMS and PC
Baud rate:19200bps



2A active equalization

2A active equalization current, continuous current 150A
Intelligent active balancing, energy transfer without consumption

5-channel battery temperature detection

4-circuit battery cells+1-circuit MOS

LED working status light

Illuminate and improve normal, alarm, protection, and other states

Reserve 2 sets of dry contacts

Safe isolation signal control

Standard three way communication port

One 485 and CAN are used as the host to communicate with the device and PC 1 channel for parallel use

Standard parallel charging current limiting module

Charging current limiting 10A, supporting parallel communication function

Capacity learning function



Built in chip, high accuracy, stability, and resistance to high and low temperaturesCan learn battery capacity in a complete cycle

Optional display screen communication

Real time monitoring of battery pack status

JK-PB2A16S15P	
Continuous current	150A
Max current	150A
Series	16S
Active balance current	2A
Over-charge protection voltage	1.2-4.35V
Charging over-current	10-150A
Interface	RS485
Bluetooth	With Bluetooth
Operate temperature	-20~70℃
	Temperature Protection
Size	300*100*18mm

JK-PB2A16S20P	
Continuous current	200A
Max current	200A
Series	16S
Active balance current	2A
Over-charge protection voltage	1.2-4.35V
Charging over-current	10-200A
Interface	RS485/CAN
Bluetooth	With Bluetooth
Operate temperature	-20~70℃
	Temperature Protection
Size	300*100*18mm

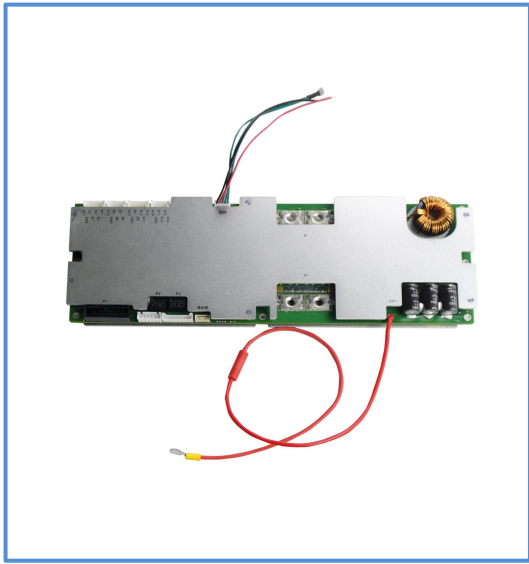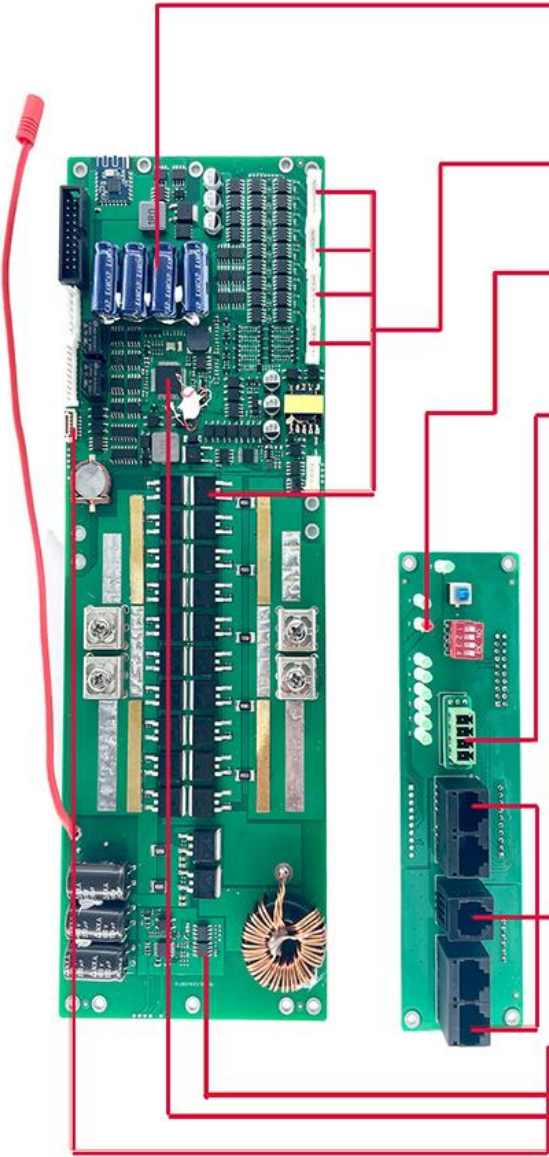

Cells Contact System (CCS)



EEL 100Ah Battery Module(CCS)	
Nominal capacity	100Ah
Operate voltage	20-29.2V (-15~55℃)
Internal resistance	≤0.15mΩ
Operating temperature(charge)	0~55℃
Operating temperature(discharge)	-20~55℃
Cycle life	≥8000 times
Weight	25 ±0.3kg
Size	415*159*119mm
Compression of the cells	300 kg.f
Number of cells	8
PCB/busbars	included



EEL 280Ah Battery Module(CCS)	
Nominal capacity	280Ah
Operate voltage	20-29.2V (-15~55℃)
Internal resistance	≤0.15mΩ
Operating temperature(charge)	0~55℃
Operating temperature(discharge)	-20~55℃
Cycle life	≥10000 times
Weight	50 ±0.3kg
Size	615*170*210mm
Compression of the cells	300 kg.f
Number of cells	8
PCB/busbars	included

EEL BATTERY CCS

High precision welding

Integrated pcb board

Fixed interface

Grade A LFP cells

Metal tightening device



EEL Battery is the first company to bring CCS technology from EV-car batteries into home energy storage,we are also the first company to open modules for customers to customize their own products.Our customers can customize any appearance and function they want, and we want to market ourselves as a solution provider and core accessories supplier.

CCS (Cells Contact System) is mainly composed of signal acquisition components (FPC, PCB, FFC, etc.), plastic/metal structural parts,integrated copper and aluminum bars, etc.,it replaces the traditional wire harness connection and is connected into a whole through processes such as heat pressing or riveting to achieve electrical The core high-voltage series and parallel connection, as well as the battery temperature sampling and cell voltage sampling functions, provide temperature and voltage to the BMS system through FPC/PCB and connector components, it is also a part of the BMS system.


Cells Contact System (CCS) Box




EEL 51.2V 100Ah Battery Wall mount	
Nominal voltage	51.2V
Rated power	5Kwh
Terminal	2 positive & 2 negative
BMS Continuous Current	100A
Communication	RS485/CAN
Support Bluetooth	Yes
One Stop Switch	Yes
Parallel batteries	Up to 15 parallel modules
Operate temperature	Charge: -10~45℃
	Discharge: -20~60℃
Size(L*W*H)	420*200*570mm



EEL 51.2V 280Ah Battery Server Rack	
Nominal voltage	51.2V
Rated power	15Kwh
Terminal	2 positive & 2 negative
BMS Continuous Current	200A
Communication	RS485/CAN
Support Bluetooth	Yes
One Stop Switch	Yes
Parallel batteries	Up to 15 parallel modules
Operate temperature	Charge: -10~45℃
	Discharge: -20~60℃
Size(L*W*H)	790*450*250mm

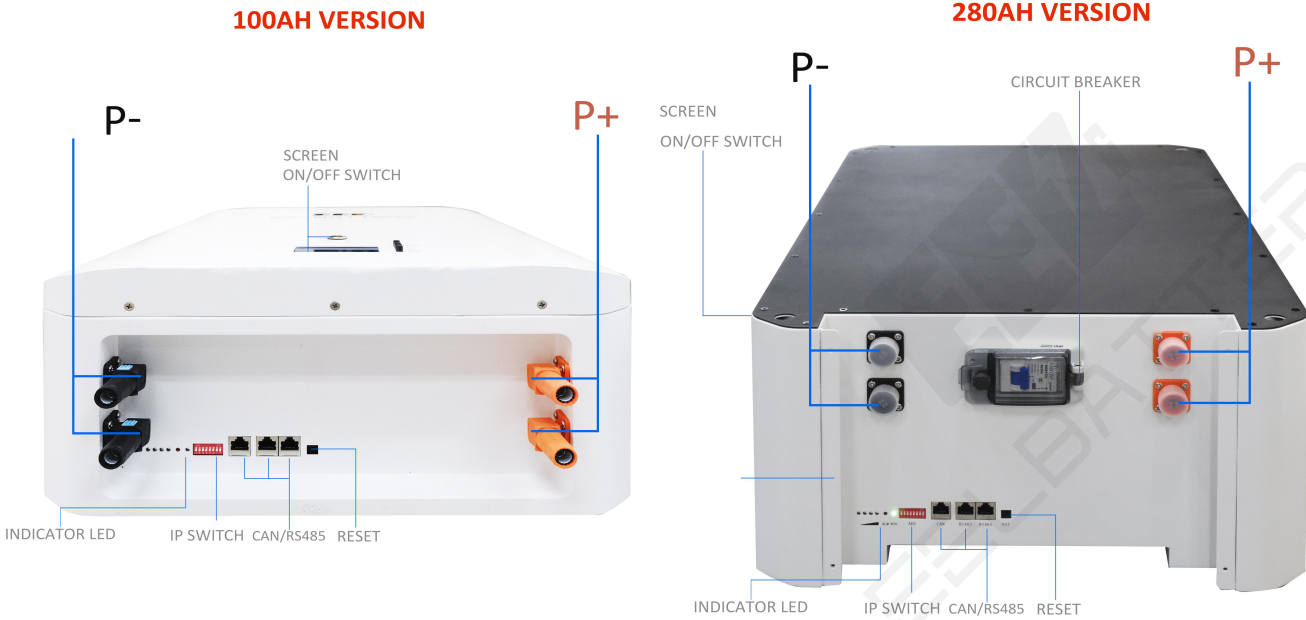

All-in-One CCS Energy Storage

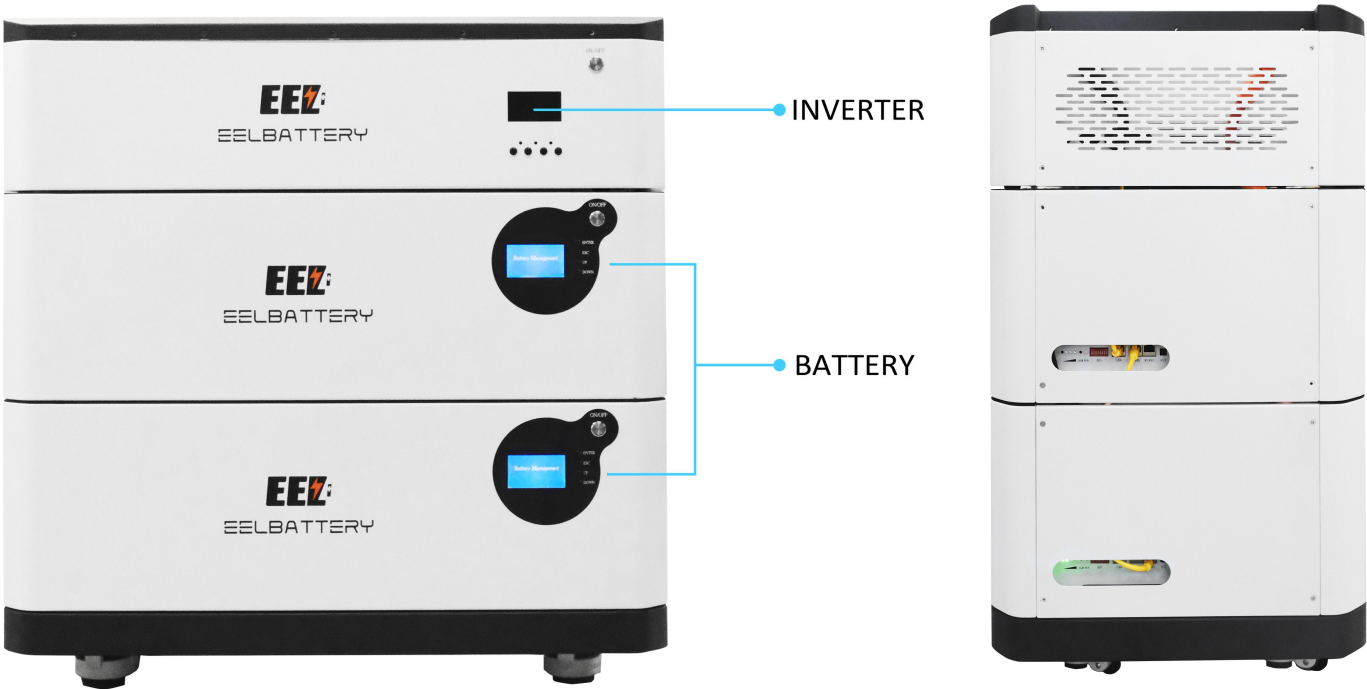

Home Energy Storage System




10Kwh System	
Nominal voltage	51.2V
Rated power	10Kwh
Continue discharge current	100A
Standard charging voltage	50V
Fast charging current	100A
Cycle life	>6000 times
Rated grid frequency	50/60Hz
MPPT voltage range	60-115 Vdc
Operate temperature	Charge: 20~55℃
	Discharge: 20~60℃
Size	602*403*621mm



16Kwh System	
Nominal voltage	51.2V
Rated power	16Kwh
Continue discharge current	200A
Standard charging voltage	50V
Fast charging current	200A
Cycle life	>8000 times
Rated grid frequency	50/60Hz
MPPT voltage range	60-115 Vdc
Operate temperature	Charge: 20~55℃
	Discharge: 20~60℃
Size	602*403*821mm

EEZ
EELBATTERY

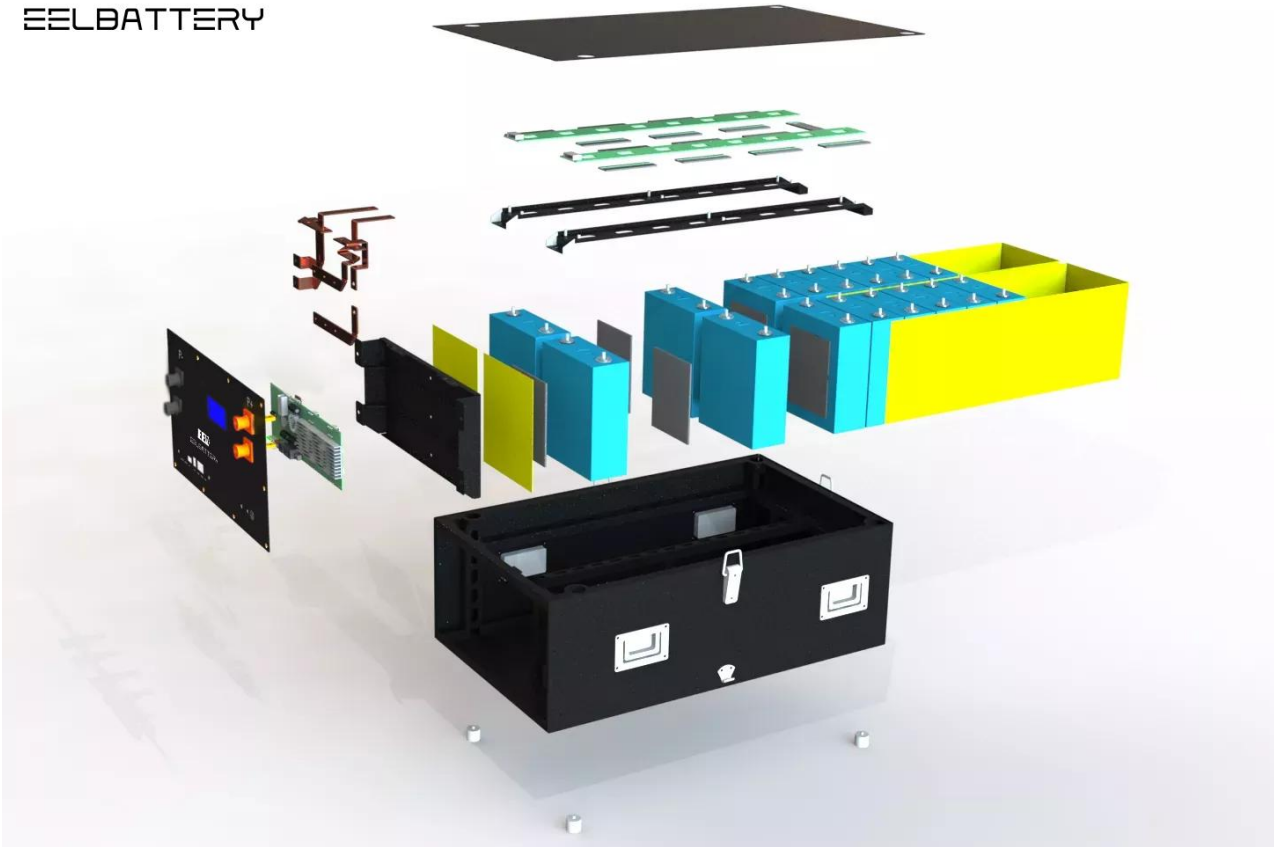

WIDELY COMPATIBLE

Growatt

SMA

SOROTEC
Power Solutions Expert

LU X POWER^{TEK}

solis

GOODWE
YOUR SOLAR ENGINE

victron energy
BLUE POWER

Amensolar
Private Limited

Deye

SOFAR
SOLAR

Voltronic Power
Advancing Power

Sacolar

Sol-Ark
Energy Insurance for your family

SAJI

MEGAREVO

Standing Battery Pack



10Kwh Standing Pack	
Nominal voltage	51.2V
Rated power	10Kwh
Terminal	2 positive & 2 negative
BMS Continuous Current	100A/150A/200A
Communication	RS485/CAN
Support Bluetooth	Yes
One Stop Switch	Yes
Parallel batteries	Up to 15 parallel modules
Operate temperature	Charge: -10~45℃
	Discharge: -20~60℃
Size	410*550*260mm



16Kwh Standing Pack	
Nominal voltage	51.2V
Rated power	16Kwh
Terminal	2 positive & 2 negative
BMS Continuous Current	100A/150A/200A
Communication	RS485/CAN
Support Bluetooth	Yes
One Stop Switch	Yes
Parallel batteries	Up to 15 parallel modules
Operate temperature	Charge: -10~45℃
	Discharge: -20~60℃
Size	410*680*260mm

Power wall Battery Pack



10Kwh Power Wall Pack	
Nominal voltage	51.2V
Rated power	10Kwh
Terminal	2 positive & 2 negative
BMS Continuous Current	100A/150A/200A
Communication	RS485/CAN
Support Bluetooth	Yes
One Stop Switch	Yes
Parallel batteries	Up to 15 parallel modules
Operate temperature	Charge: -10~45℃
	Discharge: -20~60℃
Size	410*550*260mm



16Kwh Power Wall Pack	
Nominal voltage	51.2V
Rated power	16Kwh
Continue discharge current	200A
Standard charging voltage	48V-57.6V
Rated discharge power	9000W
Communication	CAN2.0/RS485
Cycle life	5000 times
Weight	127kg
Operate temperature	Charge: 0~45℃
	Discharge: -20~45℃
Size	410*680*260mm

We Provide an Easy Energy Solution

深圳市鑫力能电子有限公司
SHENZHEN EELBATTERY CO.,LTD
www.eelbattery.com

