



Jacdac connectors


Jacdac edge connector
1.6mm FR4

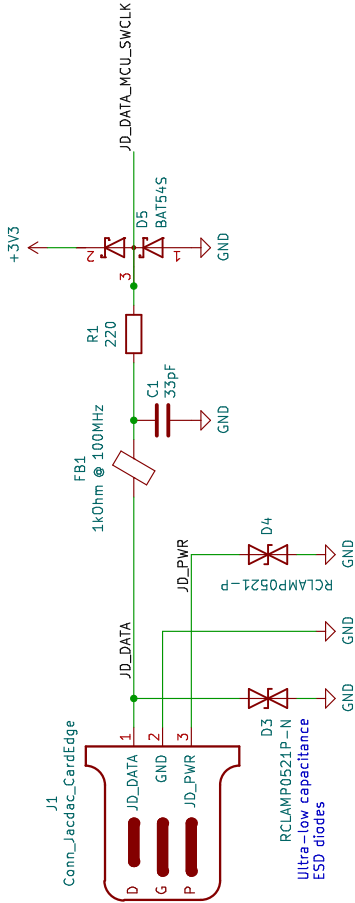


Power

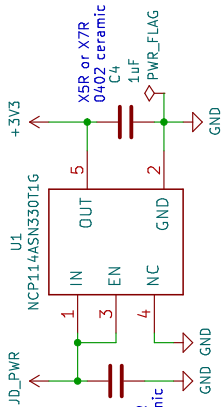


Programming/debug connector

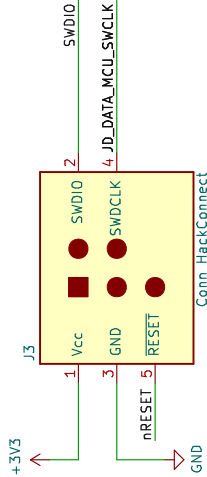


Status LED




Optoisolated relay

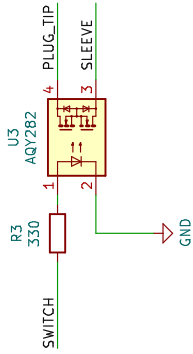

MCU

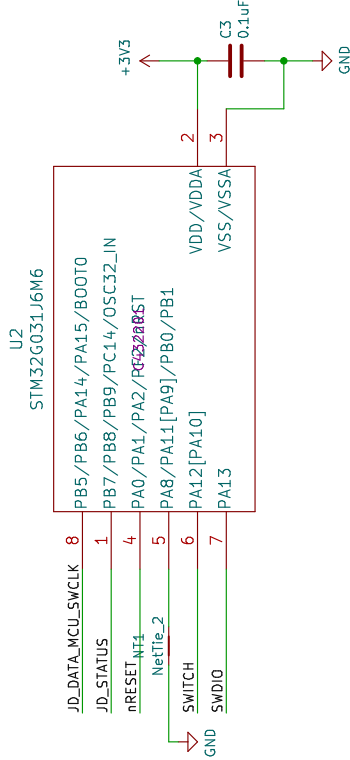

Mounting holes



JACDAC mounting holes are plated through hole.
Finished diameter 2.1mm.
Annular ring 3.0mm.
Copper/component keepout 5.0mm.

3.5mm audio plug



3-pole socket wired to be a 2-pole socket.
Accessibility switch is a 2 pole 3.5mm plug.