Composite Chest:
-70H X 42W X 32D
-Left Swing
-TL-30

Color:
-Black

Lock(s):
-1: Prep for and Install Dealer Supplied LaGard 39E

Alarm Options:
-Alarm Holes
- Timelock
  - 3 Movement - 144 HR UL Listed
- Heat Sensor and Door Contact
- Seismic Detector

Safe Options:
- DoorStop
  - Internal Hinge Stop
- Anchor Holes
  - 2 in the Front

Depository Head:
- Oakley UL Listed Night Depository Head
- Secure Housing (Bolt On)
- 24 Additional Head Keys
- Electronic Fire Chute Closure Device
- Chute Closure Retainer Kit (HS-SCD-CCR)
- Covert Camera Kit

Est. Weight of Unit: 4404 LBS

**LaGard 39E lock(s) warranty is the customer's responsibility

**Tech support of the LaGard 39E lock(s) is the customer's responsibility

**Installation of the LaGard 39E lock(s) does not void the warranty
on the safe or locker

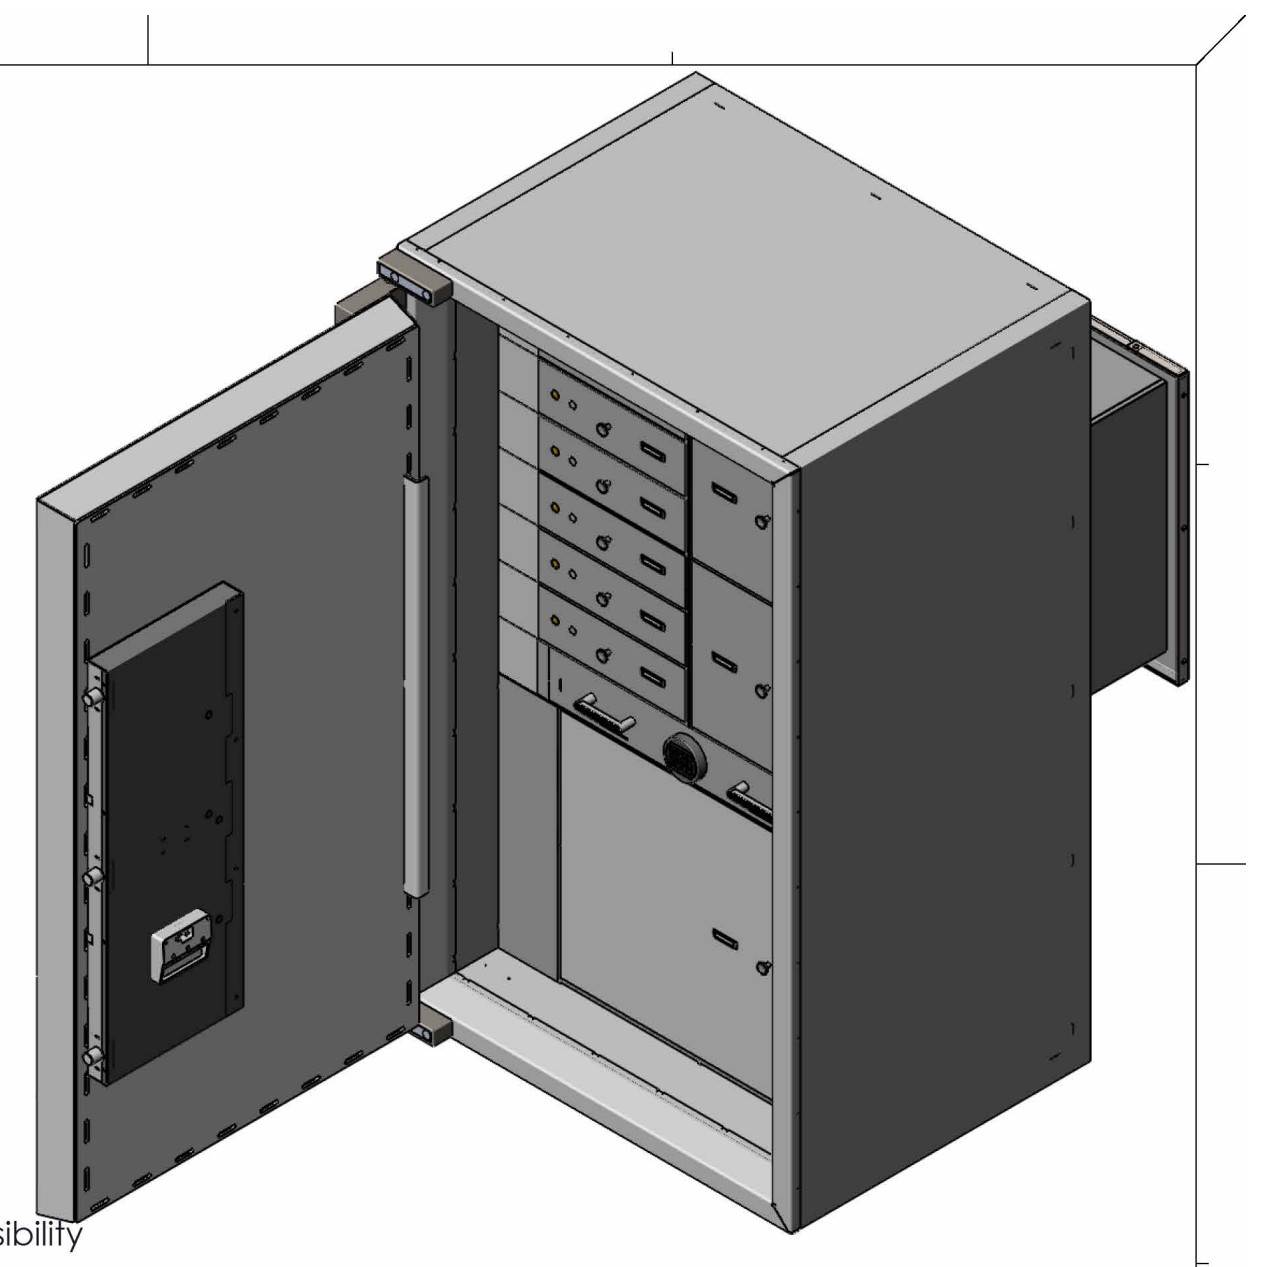

REV.	DESCRIPTION	DATE	APPROVED
A	Corrected Camera Kit	3/25/2021	JM
B	Replaced LaGards with Hamilton/NL Locks	5/6/2021	TD
C	Added chute closure retainer kit	5/12/2022	JM
D	Changed to Oakley head	6/12/2023	JM

est. 1967
HAMILTON
CUSTOM MADE SECURITY

PROPRIETARY AND CONFIDENTIAL
THESE DRAWINGS ARE THE PROPERTY OF HAMILTON SAFE CO. AND SHALL NOT BE REPRODUCED,COPIED,USED AS THE BASIS FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT PERMISSION

Customer:	
Dealer: Premier	P.O. Number:
Date: 7/11/2024	Quote Number: 20-132L
Drawn By: Katie Morris	Sales Order Number: 523750B

---

9 - Decorative Number Plate(s)

9 - Chrome Pull Knob(s)

1 - B5709 Currency Drawer(s)

6 - Single Nose Lock(s)
-1A 2A 3A 4A 5A 6A

4 - Prep for and Install Dealer Supplied LaGard 39E
-7A 1B 2B BL

1 - Adjustable Shelf in 1B
1 - Adjustable Shelf in 2B

If Utilizing Adjustable Shelves Weight Limit Should Not Exceed 60LBS

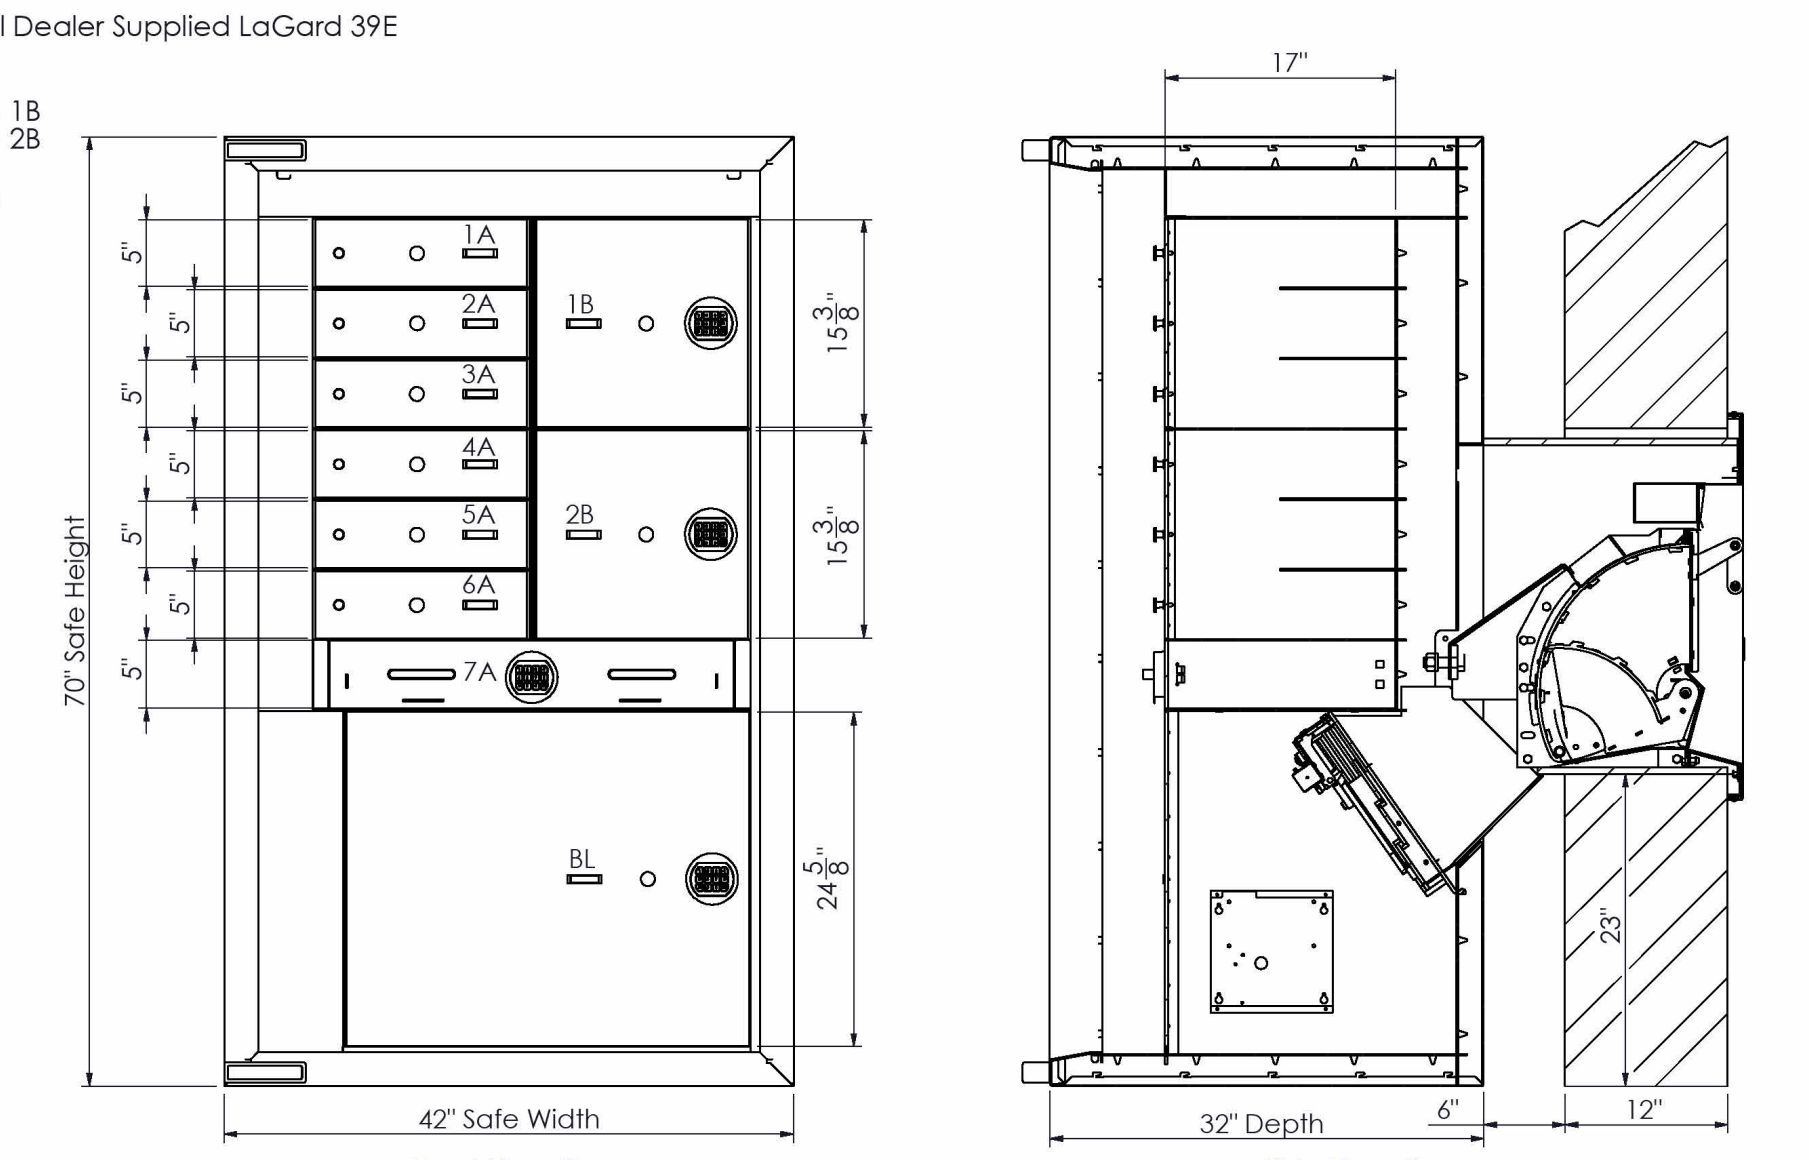

Front Elevation
(Safe Shown With No Door)

Side Elevation
(Safe Shown With No Door)

REV.	DESCRIPTION	DATE	APPROVED
-	See Cover Sheet	-	-

est. 1967
HAMILTON
CUSTOM MADE SECURITY
PROPRIETARY AND CONFIDENTIAL
THESE DRAWINGS ARE THE PROPERTY OF HAMILTON SAFE CO. AND SHALL NOT BE REPRODUCED,COPIED,USED AS THE BASIS FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT PERMISSION
Customer:
Dealer: Premier
P.O. Number:
Date: 7/11/2024
Quote Number: 20-132L
Drawn By: Katie Morris
Sales Order Number: 523750B

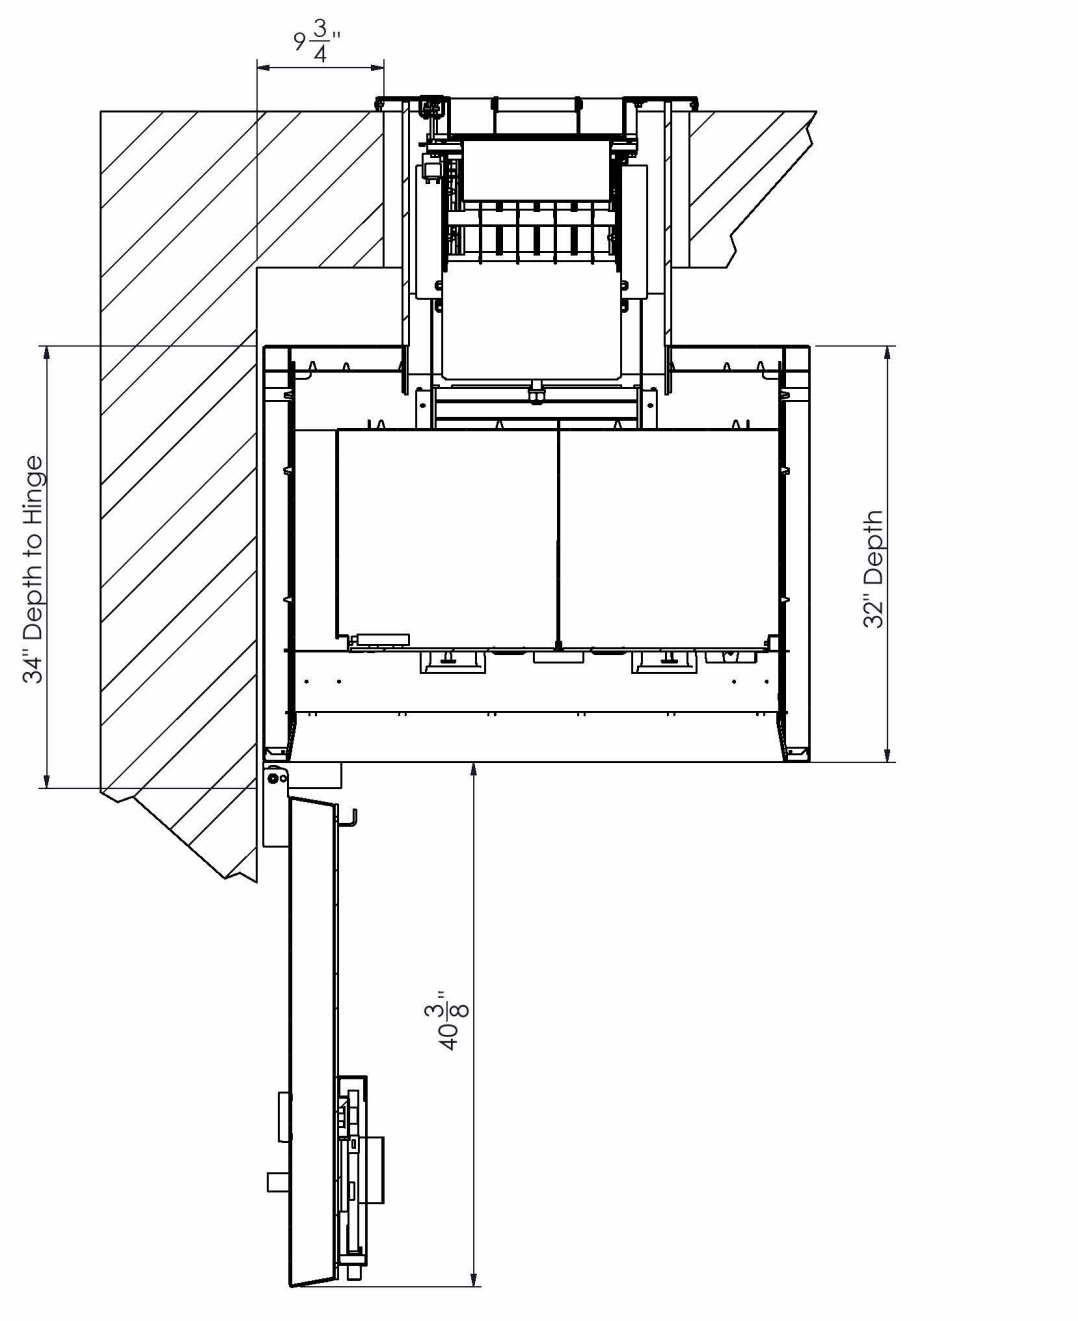

Plan View

Note:
- If safe is placed against the wall on the hinge side space safe 1/2" off the wall for clearance

REV.	DESCRIPTION	DATE	APPROVED
-	See Cover Sheet	-	-

est. 1967
HAMILTON
CUSTOM MADE SECURITY
PROPRIETARY AND CONFIDENTIAL
THESE DRAWINGS ARE THE PROPERTY OF HAMILTON SAFE CO. AND SHALL NOT BE REPRODUCED,COPIED,USED AS THE BASIS FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT PERMISSION
Customer:
Dealer: Premier
P.O. Number:
Date: 7/11/2024
Quote Number: 20-132L
Drawn By: Katie Morris
Sales Order Number: 523750B

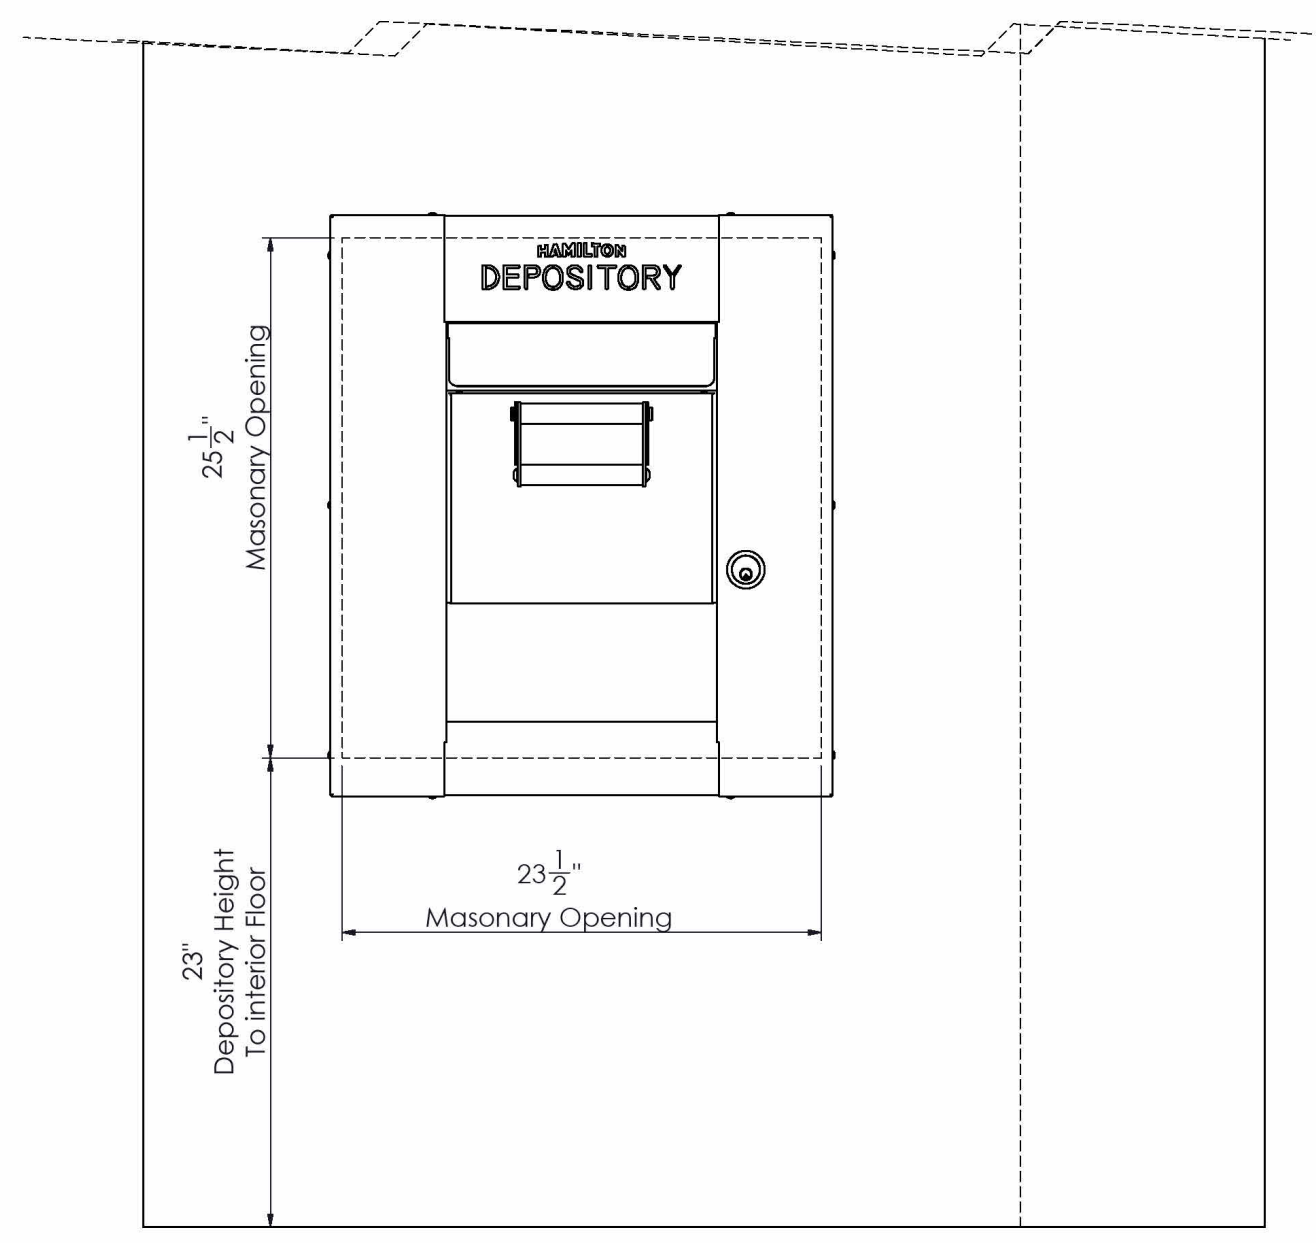

Exterior Elevation

REV.	DESCRIPTION	DATE	APPROVED
-	See Cover Sheet	-	-

est. 1967
HAMILTON
CUSTOM MADE SECURITY
PROPRIETARY AND CONFIDENTIAL
THESE DRAWINGS ARE THE PROPERTY OF HAMILTON SAFE CO. AND SHALL NOT BE REPRODUCED,COPIED,USED AS THE BASIS FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT PERMISSION
Customer:
Dealer: Premier
P.O. Number:
Date: 7/11/2024
Quote Number: 20-132L
Drawn By: Katie Morris
Sales Order Number: 523750B

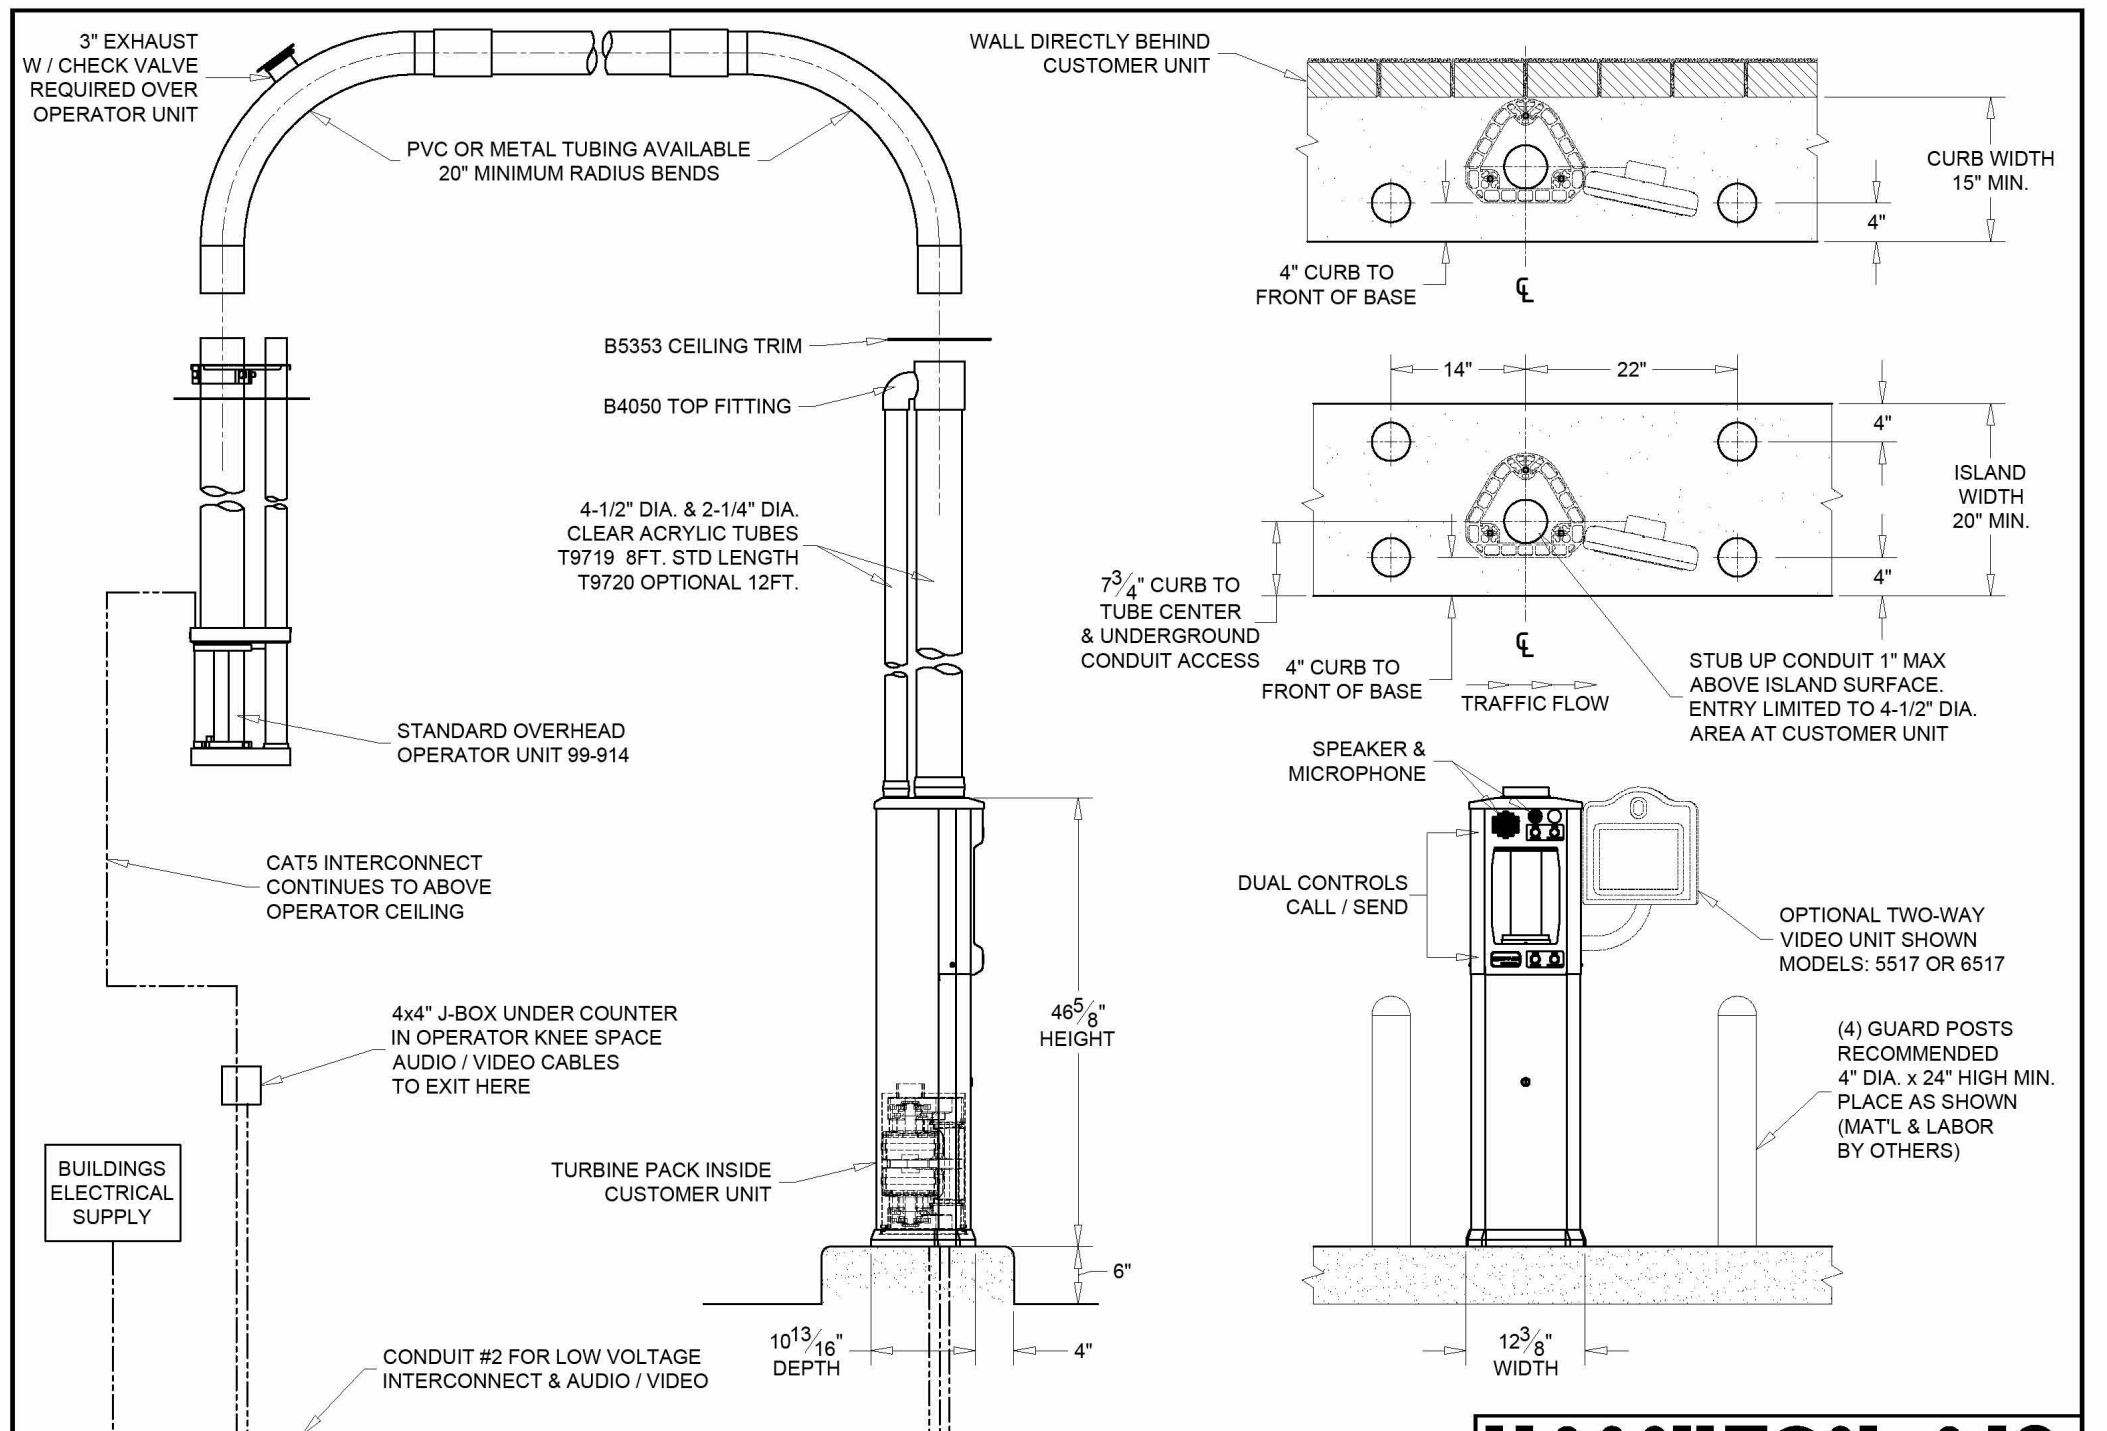

THESE DRAWINGS ARE THE PROPERTY OF HAMILTON SAFE CO. AND SHALL NOT BE REPRODUCED OR COPIED OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT PERMISSION

HAMILTON AIR®
PNEUMATIC TUBE SYSTEMS
MODEL HA1000-XLR
CUSTOMER UNIT DETAILS

DATE:	DRAWING NUMBER:	REVISION
11/26/2014	99-1140	--

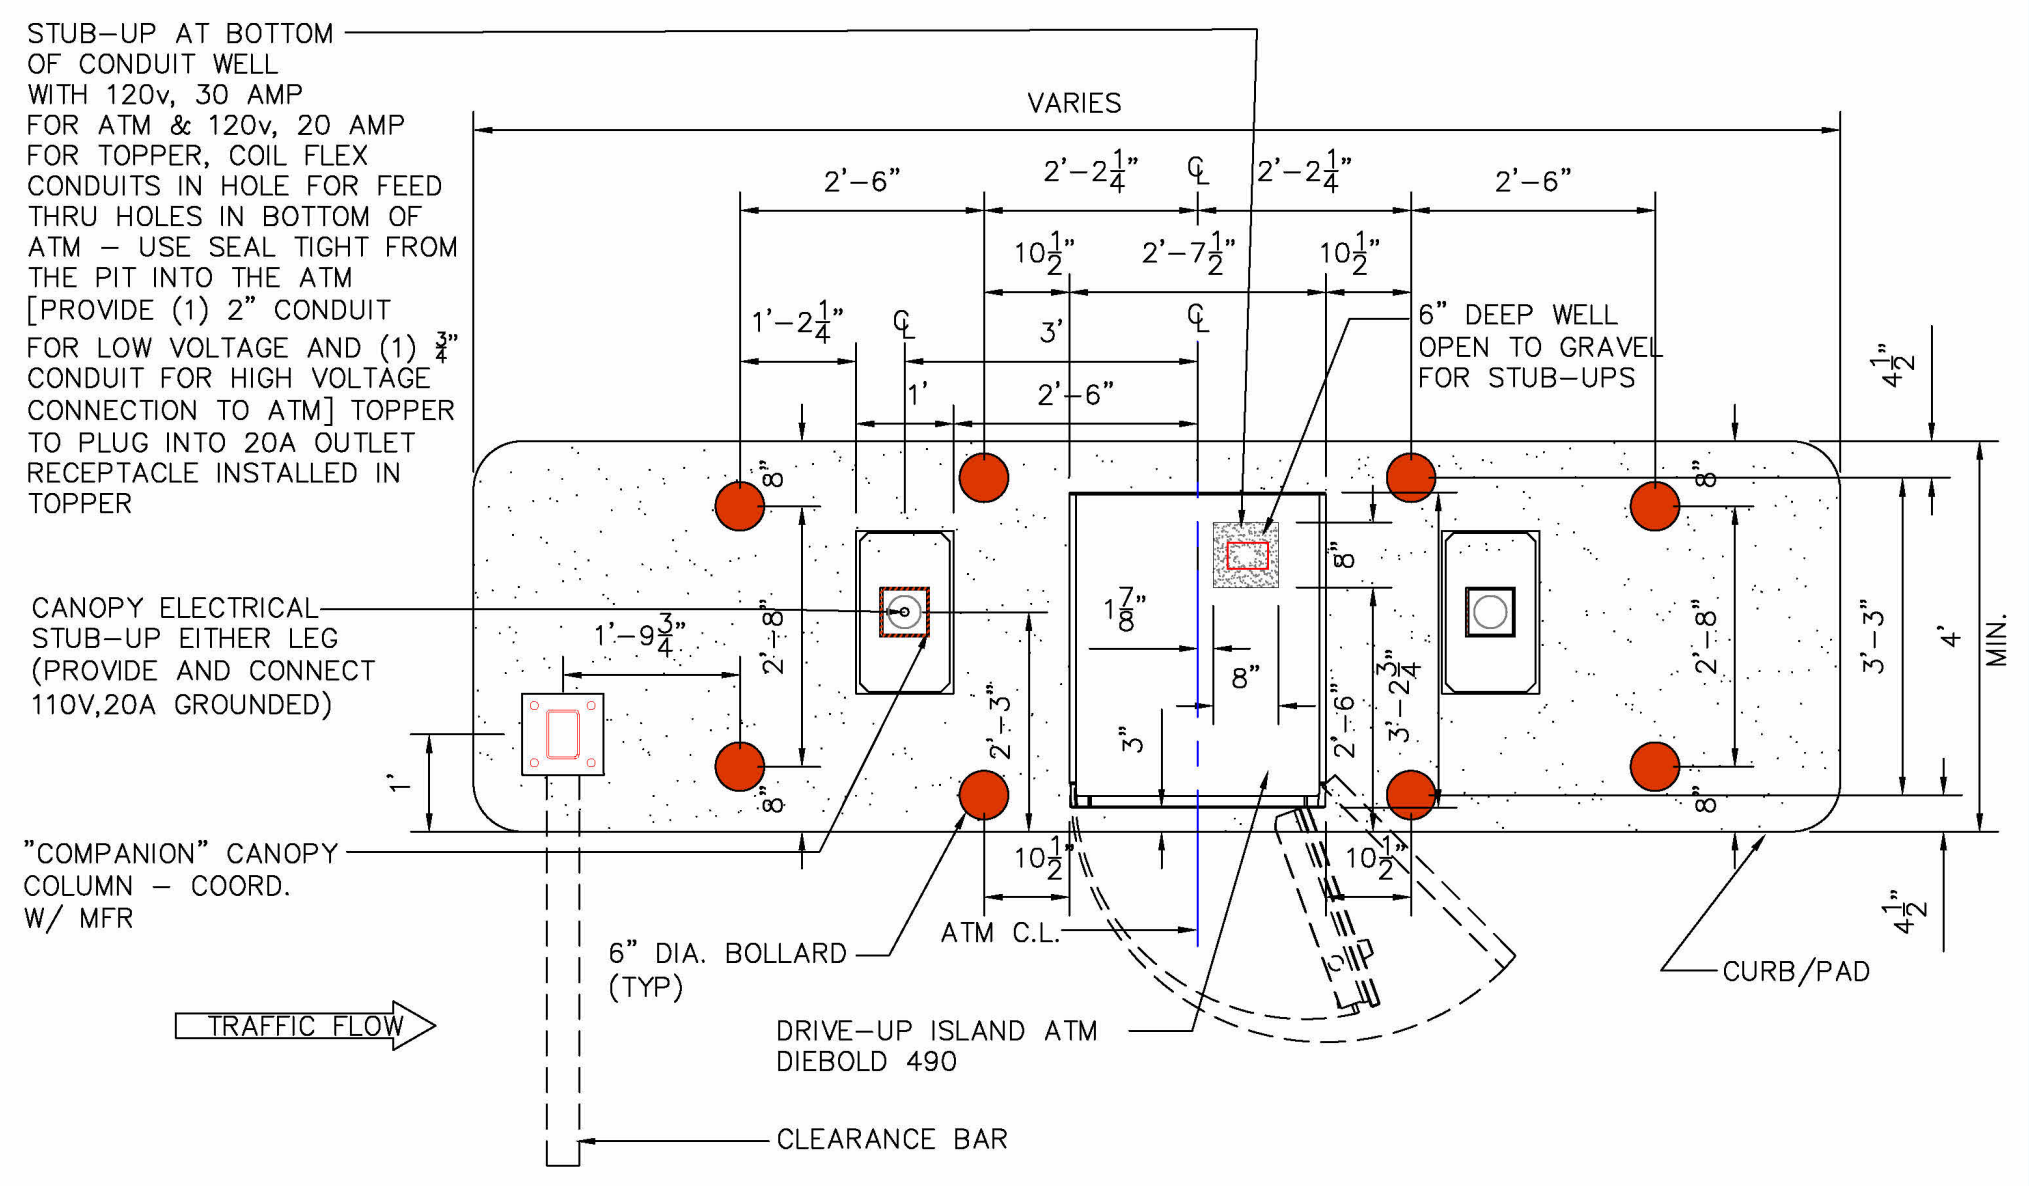

STUB–UP AT BOTTOM OF CONDUIT WELL WITH 120v, 30 AMP FOR ATM & 120v, 20 AMP FOR TOPPER, COIL FLEX CONDUITS IN HOLE FOR FEED THRU HOLES IN BOTTOM OF ATM – USE SEAL TIGHT FROM THE PIT INTO THE ATM [PROVIDE (1) 2" CONDUIT FOR LOW VOLTAGE AND (1) 3/4" CONDUIT FOR HIGH VOLTAGE CONNECTION TO ATM] TOPPER TO PLUG INTO 20A OUTLET RECEPTACLE INSTALLED IN TOPPER
VARIES
2'–6"
2'–2 1/4"
℄
2'–2 1/4"
2'–6"
10 1/2"
2'–7 1/2"
10 1/2"
1'–2 1/4"
℄
3'
℄
2'–6"
1'
6" DEEP WELL OPEN TO GRAVEL FOR STUB–UPS
4 1/2"
8"
8"
CANOPY ELECTRICAL STUB–UP EITHER LEG (PROVIDE AND CONNECT 110V,20A GROUNDED)
1'–9 3/4"
2'–8"
1 7/8"
8"
3"
2'–3"
2'–6"
3'–2 3/4"
2'–8"
3'–3"
4'
MIN.
1'
8"
8"
"COMPANION" CANOPY COLUMN – COORD. W/ MFR
10 1/2"
10 1/2"
4 1/2"
ATM C.L.
6" DIA. BOLLARD (TYP)
CURB/PAD
TRAFFIC FLOW
DRIVE–UP ISLAND ATM DIEBOLD 490
CLEARANCE BAR

FIFTH THIRD BANK

OptiVia

Companion Canopy Layout Revised 01/08/2026

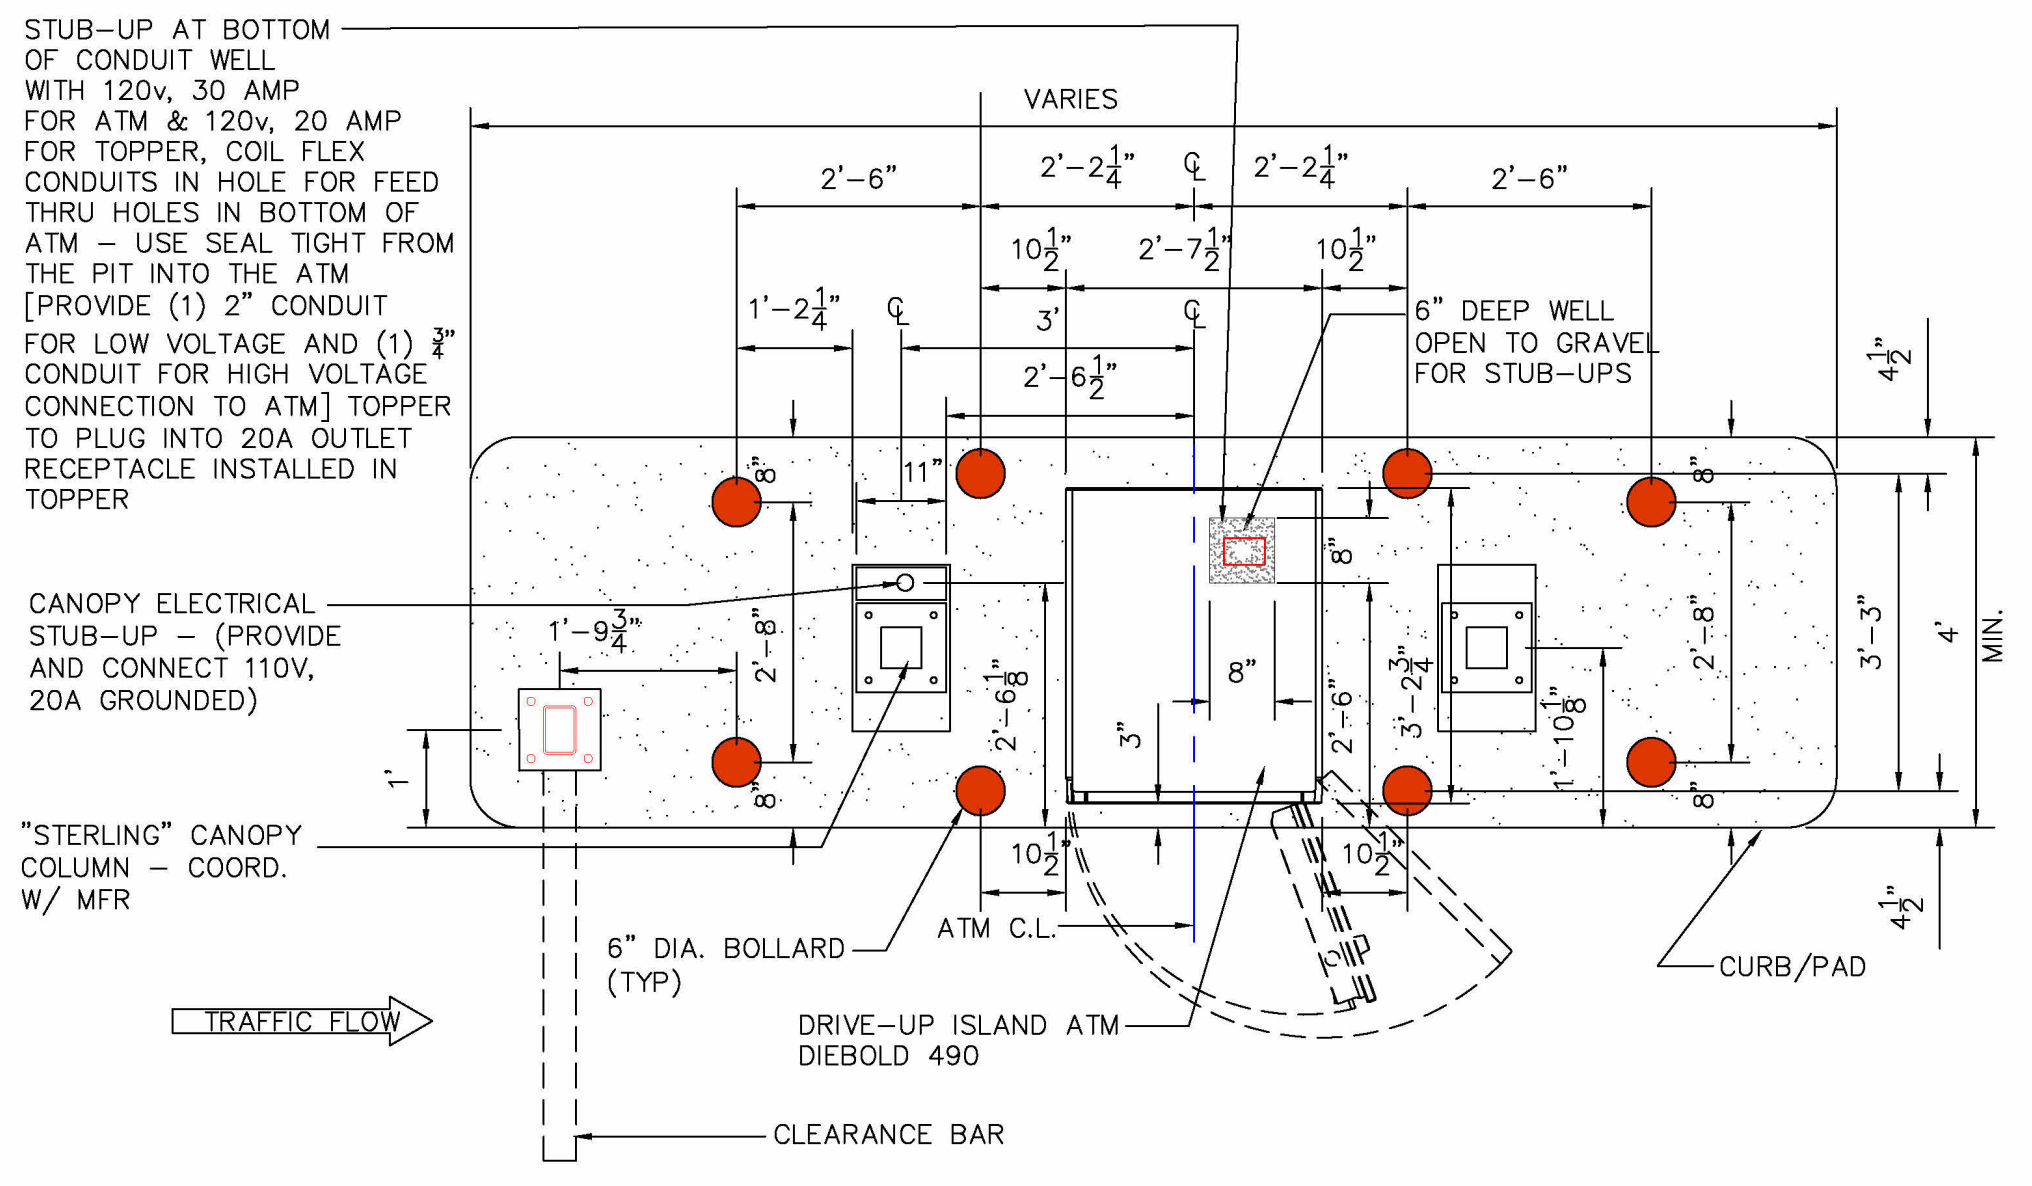

STUB–UP AT BOTTOM OF CONDUIT WELL WITH 120v, 30 AMP FOR ATM & 120v, 20 AMP FOR TOPPER, COIL FLEX CONDUITS IN HOLE FOR FEED THRU HOLES IN BOTTOM OF ATM – USE SEAL TIGHT FROM THE PIT INTO THE ATM [PROVIDE (1) 2" CONDUIT FOR LOW VOLTAGE AND (1) 3/4" CONDUIT FOR HIGH VOLTAGE CONNECTION TO ATM] TOPPER TO PLUG INTO 20A OUTLET RECEPTACLE INSTALLED IN TOPPER
VARIES
2'–6"
2'–2 1/4"
℄
2'–2 1/4"
2'–6"
10 1/2"
2'–7 1/2"
10 1/2"
1'–2 1/4"
℄
3'
℄
2'–6 1/2"
11"
6" DEEP WELL OPEN TO GRAVEL FOR STUB–UPS
4 1/2"
8"
8"
CANOPY ELECTRICAL STUB–UP – (PROVIDE AND CONNECT 110V, 20A GROUNDED)
1'–9 3/4"
2'–8"
2'–6 1/8"
8"
3"
2'–6"
3'–2 3/4"
1'–10 1/8"
2'–8"
3'–3"
4'
MIN.
1'
8"
8"
"STERLING" CANOPY COLUMN – COORD. W/ MFR
10 1/2"
10 1/2"
4 1/2"
ATM C.L.
6" DIA. BOLLARD (TYP)
CURB/PAD
TRAFFIC FLOW
DRIVE–UP ISLAND ATM DIEBOLD 490
CLEARANCE BAR

FIFTH THIRD BANK

OptiVia

Srerling Canopy Layout 11/3/25

PRAXIS3

100 Peachtree St NW
Suite 1450
Atlanta, GA 30303

404-875-4500 tel
www.praxis3.com

STATE OF GEORGIA
STUART M. ROMM
07/02/26
CERTIFICATE NO. 3452
REGISTERED ARCHITECT

Copyright (c) 2026 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26302
Project Name:
WATSON BLVD.

2711 WATSON BOULEVARD
WARNER ROBINS, GA 31093

Key Plan:

Sheet Title:
BANK EQUIPMENT CUT SHEETS

Sheet Number:
A-402

7/8/2026 2:38:35 PM