## **Progress Seminar**

An automated triple modular redundancy EDA flow for Yosys

Matt Young

10 October 2024

University of Queensland School of Electrical Engineering and Computer Science Supervisor: Assoc. Prof. John Williams

### Table of contents

- 1. Background
- 2. TaMaRa
- 3. Current status & future
- 4. Conclusion

### Table of contents


# Background

Background


\_\_\_

#### Motivation

Application Specific Integrated Circuits (ASICs) and Field Programmable Gate Arrays (FPGAs) commonly deployed in space (and on Earth)...

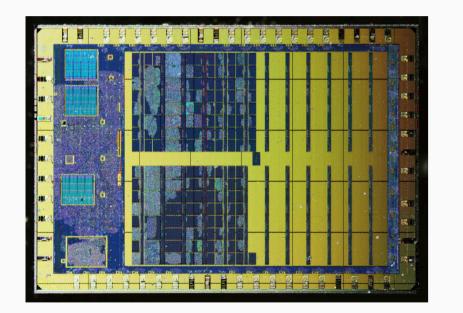

Source: https://zeptobars.com/en/read/tt04-tinytapeout-silicon-inside-gds-sky

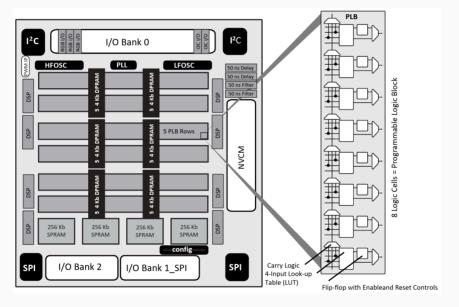


Source: Lattice iCE40 UltraPlus Family Data Sheet. © 2021 Lattice Semiconductor Corp.

### Background

Motivation

ASICs and FPGAs deployed in space/Earth for high reliability applications

## Single Event Upsets

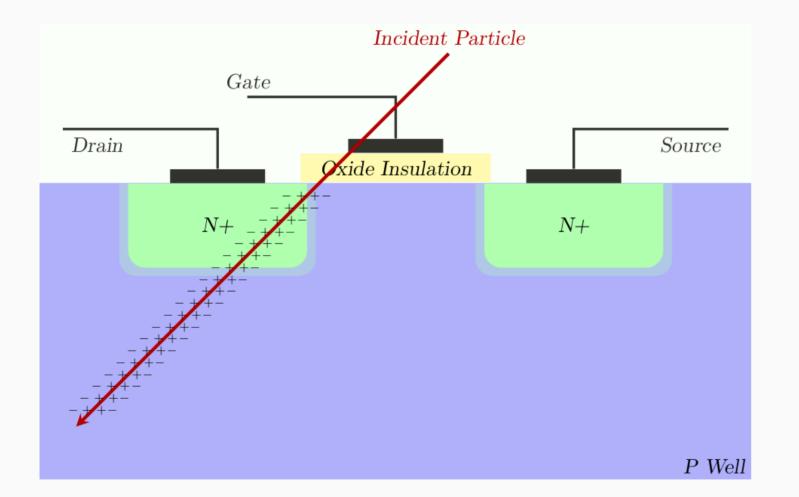

Source: https://www.cogenda.com/article/SEE


### Background

- Single Event Upsets
  - Suffer from SEUs caused by ionising radiation striking transistors and causing bit flips
  - Particularly common for space-based applications
  - Must be mitigated to prevent catastrophic failures
  - Even terrestrial applications, where the Earth's magnetosphere protects chips from the majority of ionising radiation, mitigatiOg SEUs still important for high reliability applications

## SEU protection

Protection from SEUs remains expensive!

RAD750 CPU [1] (James Webb Space Telescope, Curiosity rover, + many more) is commonly used, but costs >\$200,000 USD [2]!

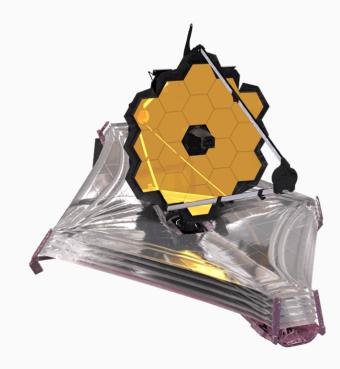


Source: https://commons.wikimedia.org/wiki/File:JWST\_spacecraft\_model\_3.png

Background

SEU protection

## Triple Modular Redundancy

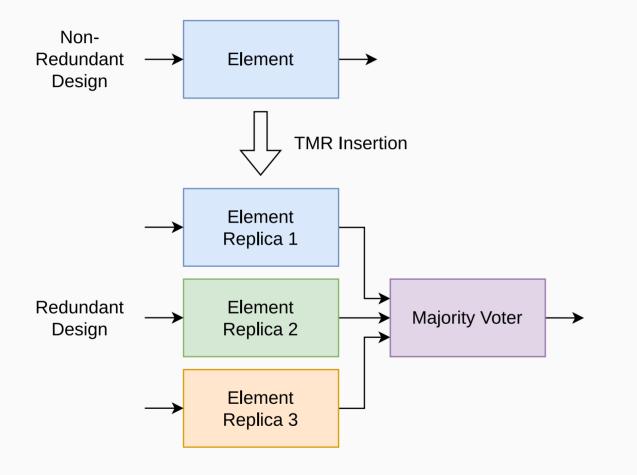

## Background

- Triple Modular Redundancy

## Triple Modular Redundancy

TMR can be added manually...

but this is **time consuming** and **error prone**.

Can we automate it?

## Background

— Triple Modular Redundancy

# TaMaRa

TaMaRa

\_\_

Implement TMR as a pass in an EDA synthesis tool.

- Integrated with the rest of the flow
- Easy to use
- Fully automated

### TaMaRa

Implement TMR as a pass in an EDA synthesis tool.

- Integrated with the rest of the flow
- Easy to use
- Fully automated

Goal: Pick any design, of any complexity, "press a button" and have it be rad-hardened.

### TaMaRa

Implement TMR as a pass in an EDA synthesis tool.

- Integrated with the rest of the flow
- Easy to use
- Fully automated

Goal: Pick any design, of any complexity, "press a button" and have it be rad-hardened.

Yosys [3] is the best (and the only) open-source, research grade EDA synthesis tool.

#### TaMaRa

Implement TMR as a pass in an EDA synthesis tool.

- Integrated with the rest of the flow
- Easy to use
- Fully automated

**Goal**: Pick any design, of any complexity, "press a button" and have it be rad-hardened.

Yosys [3] is the best (and the only) open-source, research grade EDA synthesis tool.

- Proprietary vendor tools (Synopsys, Cadence, Xilinx, etc) immediately discarded
- Can't be extended to add custom passes

#### TaMaRa

## Existing works

### Two main paradigms:

- Design-level approaches ("thinking in terms of HDL")
  - Kulis [4], Lee [5]
- Netlist-level approaches ("thinking in terms of circuits")
  - Johnson [6], Benites [7], Skouson [8]

#### TaMaRa


Existing works

### The TaMaRa algorithm

TaMaRa is mainly netlist-driven.
Voter insertion is inspired by
Benites [7] "logic cones"
concept, and parts of Johnson
[6].

Also propagate a Verilog annotation to select TMR granularity (like Kulis [4]).

Runs after techmapping (i.e. after abc in Yosys)

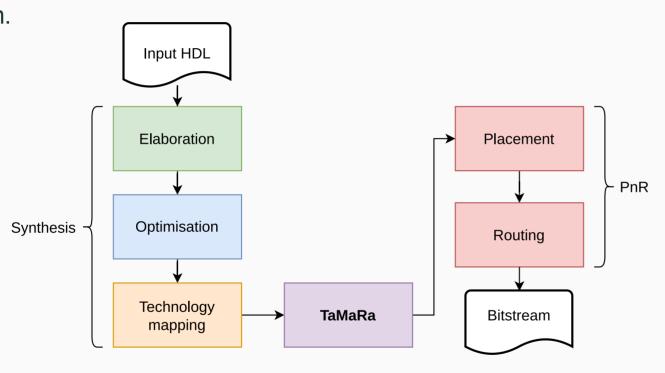

#### TaMaRa

The TaMaRa algorithm

### TaMaRa algorithm: Logic cones




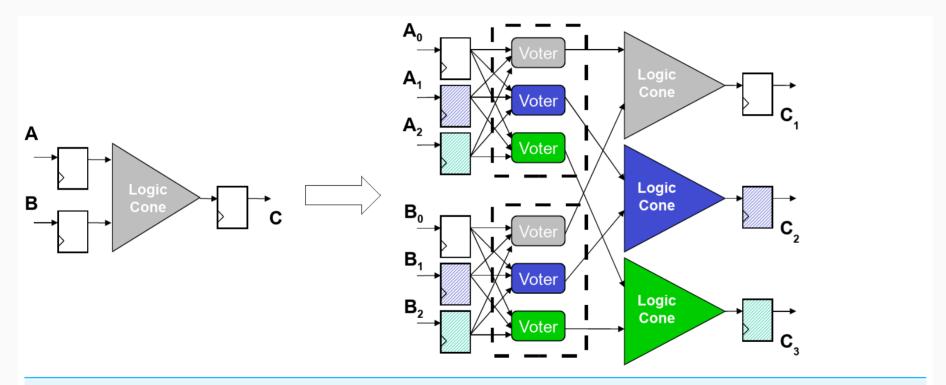


Figure 1 A logic cone is a set of logic bounded by FFs and I/O. When TMR is applied, each logic cone contains part of the voting logic.

### TaMaRa

— TaMaRa algorithm: Logic cones

### TaMaRa algorithm: In depth

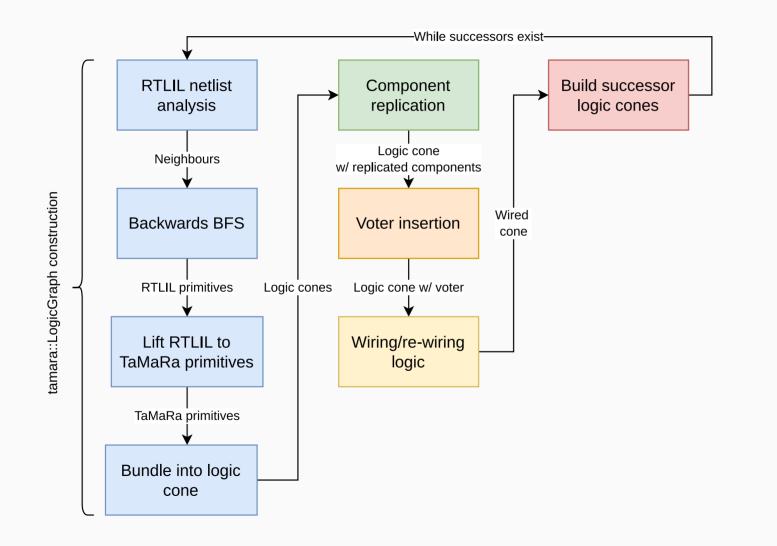

#### TaMaRa

- TaMaRa algorithm: In depth
  - Construct TaMaRa logic graph and logic cones
    - Analyse Yosys RTLIL netlist
    - Perform backwards BFS from IOs to FFs (or other IOs) to collect combinatorial RTLIL primitives
    - Convert RTLIL primitives into TaMaRa primitives
    - ► Bundle into logic cone
  - Replicate RTLIL primitives inside logic cones
  - Insert voters into logic cones
  - Wiring
    - Wire voter up to replicated primitives
    - Wire replicated primitive IOs to the rest of the circuit
    - Factor in feedback loop circuits
  - · Build successor logic cones
  - · Repeat until no more successors

## Verification

Comprehensive verification procedure using formal methods, simulation and fuzzing.

Driven by SymbiYosys tools eqy and mcy

In turn driven by Satisfiability Modulo Theorem (SMT) solvers (Yices [10], Boolector [11], etc)

### TaMaRa

Verification

### Verification

Comprehensive verification procedure using formal methods, simulation and fuzzing.

Driven by SymbiYosys tools *eqy* and *mcy* 

In turn driven by Satisfiability Modulo Theorem (SMT) solvers (Yices [10], Boolector [11], etc)

Equivalence checking: Formally verify that the circuit is functionally equivalent before and after the TaMaRa pass.

Ensures TaMaRa does not change the underlying behaviour of the circuit.

### TaMaRa

Verification

### Verification

Comprehensive verification procedure using formal methods, simulation and fuzzing.

Driven by SymbiYosys tools eqy and mcy

In turn driven by Satisfiability Modulo Theorem (SMT) solvers (Yices [10], Boolector [11], etc)

Equivalence checking: Formally verify that the circuit is functionally equivalent before and after the TaMaRa pass.

• Ensures TaMaRa does not change the underlying behaviour of the circuit.

Mutation: Formally verify that TaMaRa-processed circuits correct injected faults in a testbench

Ensures TaMaRa does its job!

#### TaMaRa

Verification

TaMaRa must work for *all* input circuits, so we need to test at scale.

## Fuzzing

TaMaRa must work for all input circuits, so we need to test at scale.

#### Idea:

- 1. Use Verismith [12] to generate random Verilog RTL.
- 2. Run TaMaRa synthesis end-to-end.
- 3. Use formal equivalence checking to verify the random circuits behave the same before/after TMR.

### TaMaRa

Fuzzing

## Fuzzing

TaMaRa must work for *all* input circuits, so we need to test at scale.

#### Idea:

- 1. Use Verismith [12] to generate random Verilog RTL.
- 2. Run TaMaRa synthesis end-to-end.
- 3. Use formal equivalence checking to verify the random circuits behave the same before/after TMR.

#### Problem: Mutation

- Need valid testbenches for these random circuits
- · Requires automatic test pattern generation (ATPG), highly non-trivial
- Future topic of further research

### TaMaRa

## Fuzzing

### Simulation

I want to simulate an SEU environment.

- · UQ doesn't have the capability to expose FPGAs to real radiation
- Physical verification is challenging (particularly measurement)

TaMaRa

Simulation

### Simulation

I want to simulate an SEU environment.

- UQ doesn't have the capability to expose FPGAs to real radiation
- Physical verification is challenging (particularly measurement)

Use one of Verilator or Yosys' own cxxrtl to simulate a full design.

- Each simulator has different trade-offs
- Currently considering picorv32 RISC-V CPU as the Device Under Test (DUT)
- Simpler DUTs will be tested as well

#### TaMaRa

Simulation

### Simulation

#### I want to simulate an SEU environment.

- UQ doesn't have the capability to expose FPGAs to real radiation
- Physical verification is challenging (particularly measurement)

Use one of Verilator or Yosys' own cxxrtl to simulate a full design.

- · Each simulator has different trade-offs
- Currently considering picorv32 RISC-V CPU as the Device Under Test (DUT)
- Simpler DUTs will be tested as well

#### Concept:

- · Iterate over the netlist, randomly consider flipping a bit every cycle
  - May be non-trivial depending on simulator
- Self-checking testbench that ensures the DUT responds correctly (e.g. RISC-V CoreMark)

#### TaMaRa

Simulation

## Current status & future

Current status & future

\_

Algorithm design and planning essentially complete. Yosys internals (particularly RTLIL) understood to a satisfactory level (still learning as I go).

- Current status & future
- Current status

Algorithm design and planning essentially complete. Yosys internals (particularly RTLIL) understood to a satisfactory level (still learning as I go).

C++ development well under way, approaching 1000 lines across 8 files. Using C++20.

Current status & future

Algorithm design and planning essentially complete. Yosys internals (particularly RTLIL) understood to a satisfactory level (still learning as I go).

C++ development well under way, approaching 1000 lines across 8 files. Using C++20.

Designed majority voters and other simple circuits in Logisim and translated to SystemVerilog HDL.

Current status & future

Algorithm design and planning essentially complete. Yosys internals (particularly RTLIL) understood to a satisfactory level (still learning as I go).

C++ development well under way, approaching 1000 lines across 8 files. Using C++20.

Designed majority voters and other simple circuits in Logisim and translated to SystemVerilog HDL.

Started on formal equivalence checking for TaMaRa voters and simple manually-designed combinatorial circuits.

### Current status & future

Algorithm design and planning essentially complete. Yosys internals (particularly RTLIL) understood to a satisfactory level (still learning as I go).

C++ development well under way, approaching 1000 lines across 8 files. Using C++20.

Designed majority voters and other simple circuits in Logisim and translated to SystemVerilog HDL.


Started on formal equivalence checking for TaMaRa voters and simple manually-designed combinatorial circuits.

Programming hopefully finished around February 2025, verification by April 2025.

### Current status & future

### Progress: Automatically triplicating a NOT gate and inserting a voter

#### Original circuit:

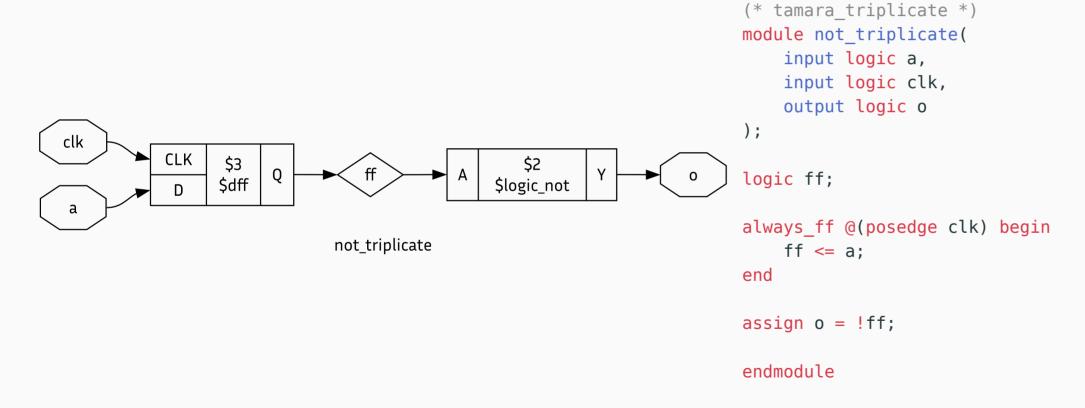


#### Current status & future

— Progress: Automatically triplicating a NOT gate and inserting a voter

### Progress: Automatically triplicating a NOT gate and inserting a voter

After tamara\_debug replicateNot:

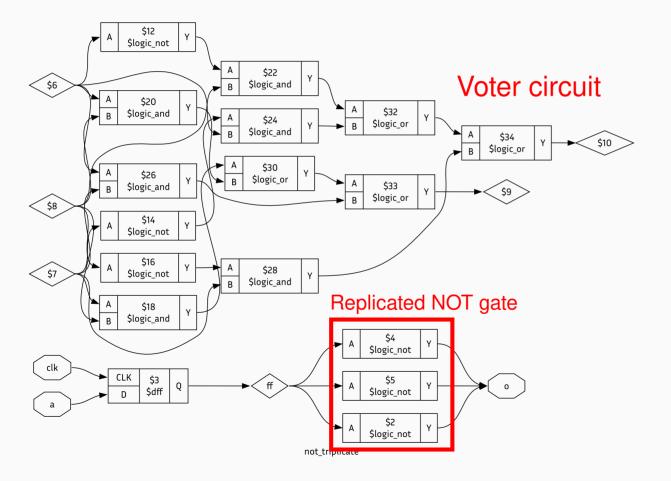

#### Current status & future

- Progress: Automatically triplicating a NOT gate and inserting a voter

## Progress: Equivalence checking

#### Voter circuit:

a	b	С	out	err
0	0	0	0	0
0	0	1	0	1
0	1	0	0	1
0	1	1	1	1
1	0	0	0	1
1	0	1	1	1
1	1	0	1	1
1	1	1	1	0


```
module voter(
    input logic a,
    input logic b,
    input logic c,
    output logic out,
    output logic err
);
    assign out = (a && b) || (b && c) || (a && c);
    assign err = (!a && c) || (a && !b) || (b && !c);
endmodule
```

#### Current status & future

Progress: Equivalence checking

## Progress: Equivalence checking

Manual design in Logisim:

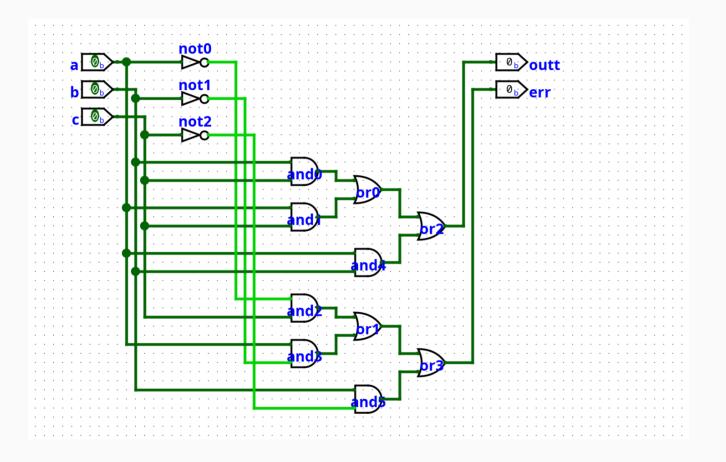

Current status & future

Progress: Equivalence checking

# Progress: Equivalence checking

```
Voter
tamara::VoterBuilder::build(RTLIL::Module
*module) {
        // NOT
        // a -> not0 -> and2
        WIRE(not0, and2);
        NOT(0, a, not0_and2_wire);
        0.00
        // AND
        // b, c -> and0 -> or0
                                                                       A $26
B $logic_or
                                                                                    A $29
B $logic_or
        WIRE(and0, or0);
        AND(0, b, c, and0_or0_wire);
        . . .
        // OR
        // and0, and1 -> or0 -> or2
        WIRE(or0, or2);
        OR(0, and0_or0_wire,
                                                                           $auto$tamara_debug.cpp:57:execute$1
and1_or0_wire, or0_or2_wire);
        return ...;
```

#### Current status & future

Progress: Equivalence checking

### Progress: Equivalence checking


Marked equivalent by eqy in conjunction with Yices!

```
/w/t/build (master) [n] >> eqy -f ../tests/formal/equivalence/voter.eqy
EQY 22:47:32 [voter] read gold: starting process "yosys -ql voter/gold.log voter/gold.ys"
EQY 22:47:32 [voter] read gold: finished (returncode=0)
EQY 22:47:32 [voter] read_gate: starting process "yosys -ql voter/gate.log voter/gate.ys"
EQY 22:47:32 [voter] read gate: finished (returncode=0)
EQY 22:47:32 [voter] combine: starting process "yosys -ql voter/combine.log voter/combine.ys"
EOY 22:47:32 [voter] combine: finished (returncode=0)
EQY 22:47:32 [voter] partition: starting process "cd voter; yosys -ql partition.log partition.ys"
EQY 22:47:32 [voter] partition: finished (returncode=0)
EQY 22:47:32 [voter] run: starting process "make -C voter -f strategies.mk"
EQY 22:47:32 [voter] run: make: Entering directory '/home/matt/workspace/tamara/build/voter'
EQY 22:47:32 [voter] run: Running strategy 'sby' on 'voter.err'...
EQY 22:47:32 [voter] run: Proved equivalence of partition 'voter.err' using strategy 'sby'
EQY 22:47:32 [voter] run: Running strategy 'sby' on 'voter.out'...
EQY 22:47:32 [voter] run: Proved equivalence of partition 'voter.out' using strategy 'sby'
EQY 22:47:32 [voter] run: make -f strategies.mk summary
EQY 22:47:32 [voter] run: make[1]: Entering directory '/home/matt/workspace/tamara/build/voter'
EQY 22:47:32 [voter] run: make[1]: Leaving directory '/home/matt/workspace/tamara/build/voter'
EQY 22:47:32 [voter] run: make: Leaving directory '/home/matt/workspace/tamara/build/voter'
EQY 22:47:32 [voter] run: finished (returncode=0)
EQY 22:47:32 [voter] Successfully proved equivalence of partition voter.out
EQY 22:47:32 [voter] Successfully proved equivalence of partition voter.err
EQY 22:47:32 [voter] Successfully proved designs equivalent
EQY 22:47:33 [voter] summary: Elapsed clock time [H:MM:SS (secs)]: 0:00:00 (0)
EQY 22:47:33 [voter] summary: Elapsed process time [H:MM:SS (secs)]: 0:00:00 (0)
EQY 22:47:33 [voter] DONE (PASS, rc=0)
```

#### Current status & future


Progress: Equivalence checking

Original, very simple circuit:

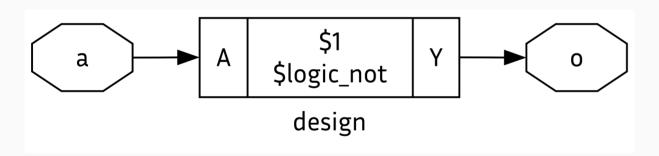

### Current status & future

#### After manual voter insertion (using SystemVerilog):

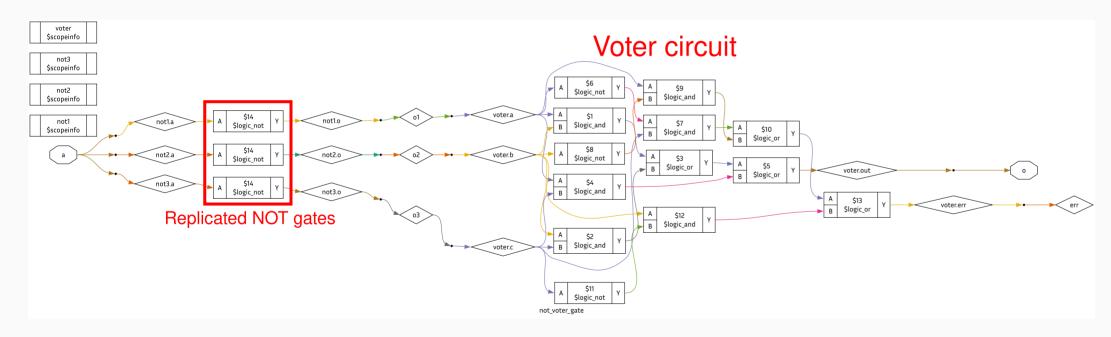

#### Current status & future

Are they equivalent? Yes! (Thankfully)

```
-/w/t/build (master) [n] ≫ eqy -f ../tests/formal/equivalence/not voter.eqy
EQY 22:10:20 [not_voter] read_gold: starting process "yosys -ql not voter/gold.log not voter/gold.ys"
EQY 22:10:20 [not voter] read gold: finished (returncode=0)
EQY 22:10:20 [not_voter] read_gate: starting process "yosys -ql not voter/gate.log not voter/gate.ys"
EQY 22:10:20 [not voter] read gate: finished (returncode=0)
EQY 22:10:20 [not voter] combine: starting process "yosys -ql not voter/combine.log not voter/combine.ys"
 EQY 22:10:20 [not voter] combine: finished (returncode=0)
 EQY 22:10:20 [not voter] partition: starting process "cd not voter; yosys -ql partition.log partition.ys"
EQY 22:10:20 [not voter] partition: finished (returncode=0)
EQY 22:10:20 [not voter] run: starting process "make -C not voter -f strategies.mk"
EQY 22:10:20 [not_voter] run: make: Entering directory '/home/matt/workspace/tamara/build/not voter'
EQY 22:10:20 [not voter] run: Running strategy 'sby' on 'design.o'...
EQY 22:10:20 [not voter] run: Proved equivalence of partition 'design.o' using strategy 'sby'
 EQY 22:10:20 [not voter] run: make -f strategies.mk summary
EQY 22:10:20 [not voter] run: make[1]: Entering directory /home/matt/workspace/tamara/build/not voter
EQY 22:10:20 [not voter] run: make[1]: Leaving directory '/home/matt/workspace/tamara/build/not voter'
EQY 22:10:20 [not voter] run: make: Leaving directory '/home/matt/workspace/tamara/build/not voter'
EQY 22:10:20 [not voter] run: finished (returncode=0)
EQY 22:10:20 [not voter] Successfully proved equivalence of partition design.o
EQY 22:10:20 [not voter] Successfully proved designs equivalent
 EQY 22:10:20 [not voter] summary: Elapsed clock time [H:MM:SS (secs)]: 0:00:00 (0)
EQY 22:10:20 [not voter] summary: Elapsed process time [H:MM:SS (secs)]: 0:00:00 (0)
EQY 22:10:20 [not voter] DONE (PASS, rc=0)
```

Current status & future


Are they equivalent? Yes! (Thankfully)

```
-/w/t/build (master) [n] >> eqy -f ../tests/formal/equivalence/not voter.eqy
EQY 22:10:20 [not voter] read gold: starting process "yosys -ql not voter/gold.log not voter/gold.ys"
EQY 22:10:20 [not voter] read gold: finished (returncode=0)
EQY 22:10:20 [not_voter] read_gate: starting process "yosys -ql not voter/gate.log not voter/gate.ys"
EQY 22:10:20 [not voter] read gate: finished (returncode=0)
EQY 22:10:20 [not voter] combine: starting process "yosys -ql not voter/combine.log not voter/combine.ys"
 EQY 22:10:20 [not voter] combine: finished (returncode=0)
 EQY 22:10:20 [not_voter] partition: starting process "cd not voter; yosys -ql partition.log partition.ys"
EQY 22:10:20 [not voter] partition: finished (returncode=0)
EQY 22:10:20 [not voter] run: starting process "make -C not voter -f strategies.mk"
EQY 22:10:20 [not voter] run: make: Entering directory '/home/matt/workspace/tamara/build/not voter'
EQY 22:10:20 [not voter] run: Running strategy 'sby' on 'design.o'...
EQY 22:10:20 [not voter] run: Proved equivalence of partition 'design.o' using strategy 'sby'
 EQY 22:10:20 [not voter] run: make -f strategies.mk summary
 EQY 22:10:20 [not voter] run: make[1]: Entering directory '/home/matt/workspace/tamara/build/not voter
EQY 22:10:20 [not voter] run: make[1]: Leaving directory '/home/matt/workspace/tamara/build/not voter'
EQY 22:10:20 [not voter] run: make: Leaving directory '/home/matt/workspace/tamara/build/not voter'
EQY 22:10:20 [not voter] run: finished (returncode=0)
EQY 22:10:20 [not voter] Successfully proved equivalence of partition design.o
EQY 22:10:20 [not voter] Successfully proved designs equivalent
 EQY 22:10:20 [not voter] summary: Elapsed clock time [H:MM:SS (secs)]: 0:00:00 (0)
EQY 22:10:20 [not voter] summary: Elapsed process time [H:MM:SS (secs)]: 0:00:00 (0)
EQY 22:10:20 [not voter] DONE (PASS, rc=0)
```

Caveat: Still need to verify circuits with more complex logic (i.e. DFFs).

Current status & future

### Current problem: Duplicate DFFs

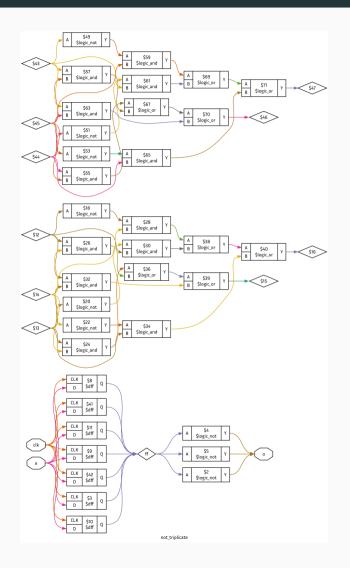

```
7.2. Computing logic graph
Module has 1 output ports, 2 selected cells
Searching from output port o
Starting search for cone 0
    ... [snip] ...
Search complete for cone 0, have 3 items
Replicating 3 collected items for logic cone 0
    Replicating ElementCellNode $logic_not$../tests/verilog/
not triplicate.sv:16$2
    Replicating ElementWireNode ff
    Replicating FFNode $procdff$3
Checking terminals
Input node $procdff$3 is not IONode, replicating it
    Replicating FFNode $procdff$3
Warning: When replicating FFNode $procdff$3 in cone 0: Already
replicated in logic cone 0
Input node o is IONode, it will NOT be replicated
Inserting voter into logic cone 0
... [snip] ...
```

#### Current status & future

Current problem: Duplicate DFFs

## The future

#### Tasks that remain (more or less):

- Fixing duplicate logic elements when replicating RTLIL primitives
- · Wiring voter to logic elements, and wiring replicated logic elements to the rest of the circuit
- Considering wiring for feedback circuits (expected to be complex/massive time sink!)
- Global routing of error signal to a net
- Processing complex circuits like picorv32
- · Writing a cycle-accurate fault-injection simulator, and associated testbenches
- Formal equivalence checking for complex circuits
- Formal mutation coverage
- Fuzzing (if time permits)

### Current status & future

— The future

# The future

I'm aiming to produce at least one academic publication from this thesis.

- If TaMaRa works, its hybrid algorithm addresses a number of limitations in previous literature
- May be useful for research labs (CubeSats) and industry

### Current status & future

— The future

# The future

I'm aiming to produce at least one academic publication from this thesis.

- If TaMaRa works, its hybrid algorithm addresses a number of limitations in previous literature
- May be useful for research labs (CubeSats) and industry

TaMaRa plugin code and tests will be released open-source under the MPL 2.0 (used by Firefox, Eigen, etc). Papers will hopefully be available under CC-BY.

TaMaRa will be freely available for anyone to use and build on. Combination of academic publication + open source for widest possible reach.

### Current status & future

— The future

I'm aiming to produce at least one academic publication from this thesis.

- · If TaMaRa works, its hybrid algorithm addresses a number of limitations in previous literature
- May be useful for research labs (CubeSats) and industry

TaMaRa plugin code and tests will be released open-source under the MPL 2.0 (used by Firefox, Eigen, etc). Papers will hopefully be available under CC-BY.

TaMaRa will be freely available for anyone to use and build on. Combination of academic publication + open source for widest possible reach.

I have also spoken with the team at YosysHQ GmbH and Sandia National Laboratories, who are very interested in the results of this project and its applications.

# Conclusion

## Conclusion

\_\_\_

# Summary

- TaMaRa: Automated triple modular redundancy EDA flow for Yosys
- Fully integrated into Yosys suite
- Takes any circuit, helps to prevent it from experiencing SEUs by adding TMR
- Synthesises netlist-driven approaches [9], [6] with design-level approaches [4]
- **Key goal:** "Click a button" and have any circuit run in space/in high reliability environments!

I'd like to extend my gratitude to N. Engelhardt of YosysHQ, the team at Sandia National Laboratories, and my supervisor Assoc. Prof. John Williams for their support and interest during this thesis so far.

### Conclusion

Summary

#### References

- R. Berger et al., "The RAD750™ a radiation hardened PowerPC™ processor for high performance spaceborne applications," in 2001 IEEE Aerospace Conference Proceedings (Cat. No.01TH8542), 2001, pp. 2263–2272. doi: 10.1109/AER0.2001.931184.
- [2] H. Hagedoorn, "NASA Perseverance rover 200 MHZ CPU costs \$200K." Accessed: Aug. 20, 2024. [Online]. Available: https://www.guru3d.com/story/nasa-perseverance-rover-200-mhz-cpu-costs-200k/
- [3] C. Wolf and J. Glaser, "Yosys A Free Verilog Synthesis Suite," in *Proceedings of Austrochip 2013*, 2013. [Online]. Available: http://yosyshq.net/yosys/files/yosys-austrochip 2013.pdf
- [4] S. Kulis, "Single Event Effects mitigation with TMRG tool," Journal of Instrumentation, vol. 12, no. 1, p. C01082–C01082, Jan. 2017, doi: 10.1088/1748-0221/12/01/c01082.
- [5] G. Lee, D. Agiakatsikas, T. Wu, E. Cetin, and O. Diessel, "TLegUp: A TMR Code Generation Tool for SRAM-Based FPGA Applications Using HLS," in 2017 IEEE 25th Annual International Symposium on Field-Programmable Custom Computing Machines (FCCM), 2017, pp. 129–132. doi: 10.1109/FCCM.2017.57.
- J. M. Johnson and M. J. Wirthlin, "Voter insertion algorithms for FPGA designs using triple modular redundancy," in *Proceedings of the 18th annual ACM/SIGDA international symposium on Field programmable gate arrays*, in FPGA '10. ACM, Feb. 2010. doi: 10.1145/1723112.1723154.
- L. A. C. Benites and F. L. Kastensmidt, "Automated design flow for applying Triple Modular Redundancy (TMR) in complex digital circuits," in 2018 IEEE 19th Latin-American Test Symposium (LATS), 2018, pp. 1–4. doi: 10.1109/LATW.2018.8349668.
- D. Skouson, A. Keller, and M. Wirthlin, "Netlist Analysis and Transformations Using SpyDrNet," in *Proceedings of the 19th Python in Science Conference*, M. Agarwal, C. Calloway, D. Niederhut, and D. Shupe, Eds., 2020, pp. 40–47. doi: 10.25080/Majora-342d178e-006.
- [9] G. Beltrame, "Triple Modular Redundancy verification via heuristic netlist analysis," *PeerJ Computer Science*, vol. 1, p. e21, Aug. 2015, doi: 10.7717/peerj-cs.21.
- [10] B. Dutertre, "Yices 2.2," in International Conference on Computer Aided Verification, 2014, pp. 737–744.
- [11] A. Niemetz, M. Preiner, and A. Biere, "Boolector 2.0," Journal on Satisfiability, Boolean Modeling and Computation, vol. 9, no. 1, pp. 53–58, 2014.
- Y. Herklotz and J. Wickerson, "Finding and Understanding Bugs in FPGA Synthesis Tools," in ACM/SIGDA Int. Symp. on Field-Programmable Gate Arrays, in FPGA '20. Seaside, CA, USA: ACM, 2020. doi: 10.1145/3373087.3375310.

#### Conclusion

References

