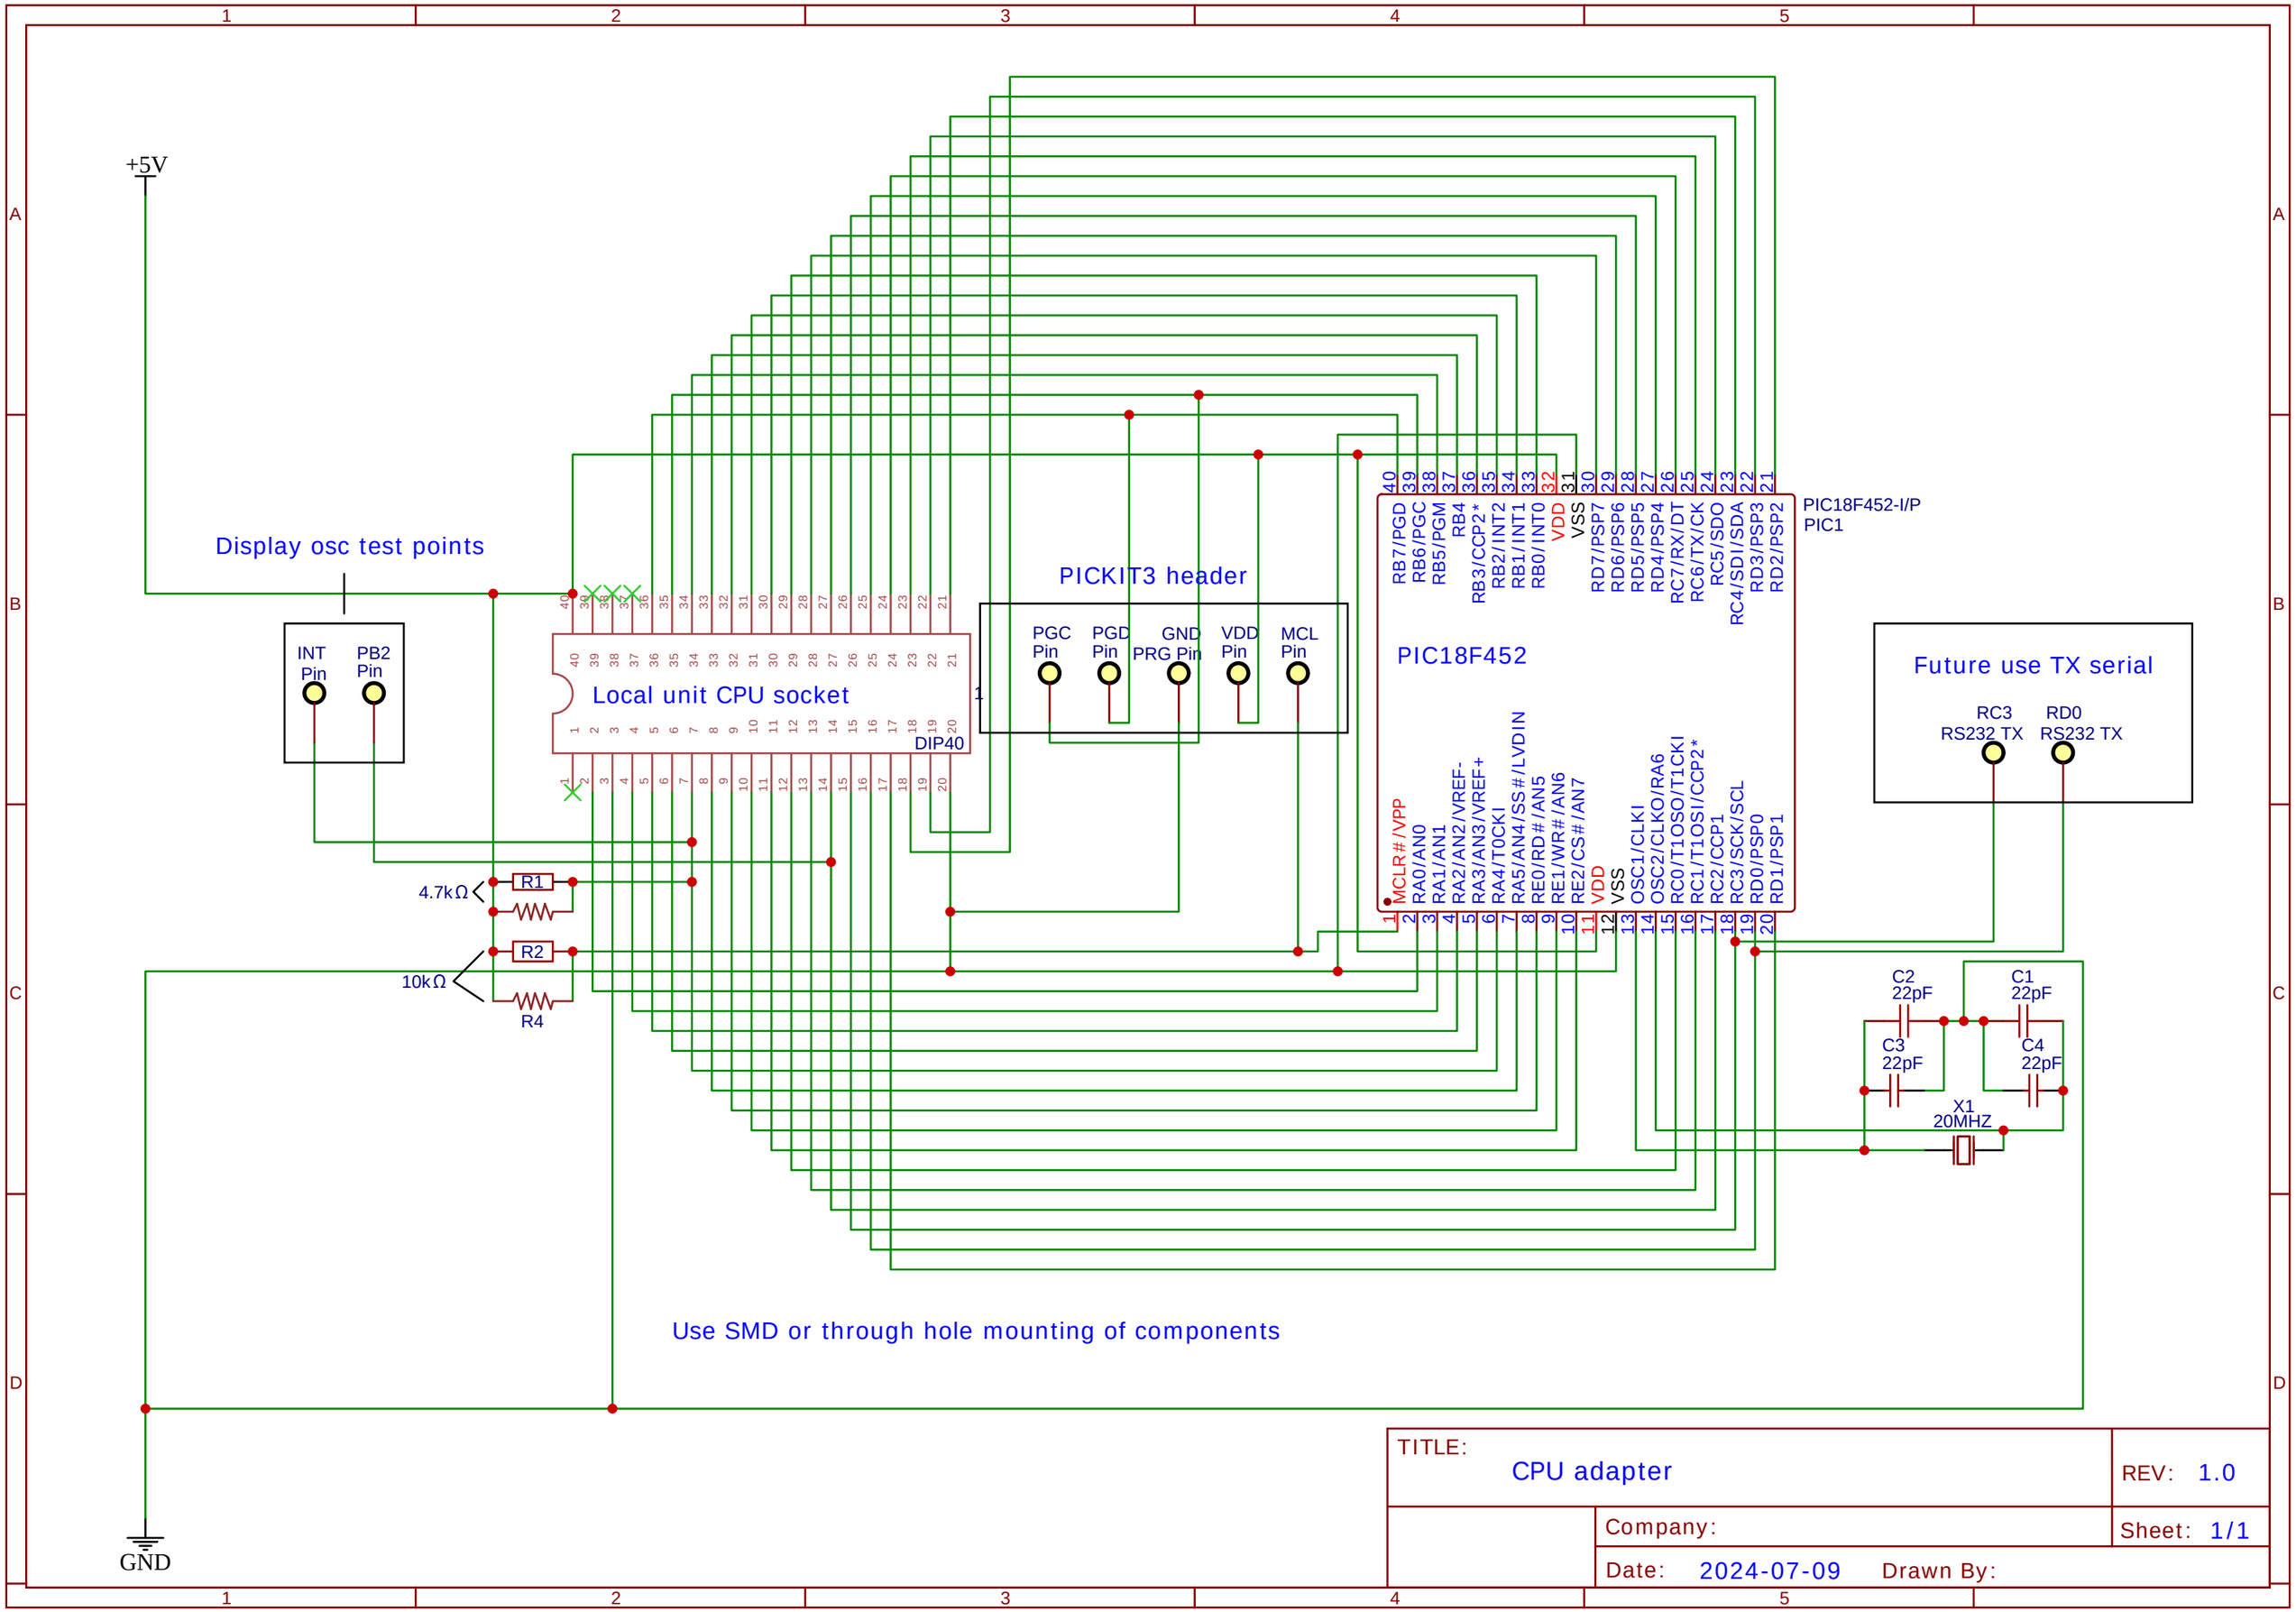
+5V
Display osc test points
INT Pin
PB2 Pin
Local unit CPU socket
DIP40
PICKIT3 header
PGC Pin
PGD Pin
GND PRG Pin
VDD Pin
MCL Pin
PIC18F452
PIC18F452-I/P
PIC1
Future use TX serial
RC3 RS232 TX
RD0 RS232 TX
4.7kΩ
R1
10kΩ
R2
R4
C2 22pF
C1 22pF
C3 22pF
C4 22pF
X1 20MHZ
GND
Use SMD or through hole mounting of components
TITLE:
CPU adapter
REV: 1.0
Company:
Sheet: 1/1
Date: 2024-07-09
Drawn By: