
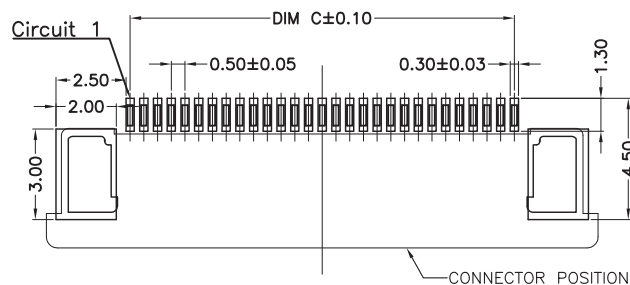


Specifications:
Current Rating:0.5A AC/DC
Voltage Rating:50V AC/DC
Contact Resistance:20m ohm. Max.
Insulation Resistance:50M ohm. Min.
Withstanding Voltage:500V AC For One Minute
Operating Temperature Range:-25°C~+85°C
Material and Finish
Insulator:High Temp. Plastic (LCP UL94V-0)
Insulator Color:Natural.
Latch:High Temp. Plastic (LCP UL94V-0)
Latch Color:Black
Contact:Copper Alloy
Plating:Matte Tin Plated

How To Order
1226-XX-02-TR
Tape&Reel
Bottom Contact Type
No Of Positions

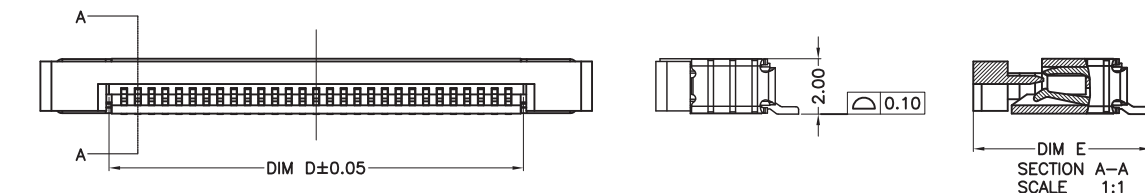


RECOMMENDED P.C.B PATTERN LAYOUT

Contacts Dimension:

PIN NO	A	B	C	D	PIN NO	A	B	C	D	PIN NO	A	B	C	D	PIN NO	A	B	C	D	PIN NO	E
4	7.60	6.50	1.50	2.60	19	15.10	14.00	9.00	10.10	34	22.60	21.50	16.50	17.60	49	30.10	29.00	24.00	25.10	4-34	5.20
5	8.10	7.00	2.00	3.10	20	15.60	14.50	9.50	10.60	35	23.10	22.00	17.00	18.10	50	30.60	29.50	24.50	25.60	35-60	5.70
6	8.60	7.50	2.50	3.60	21	16.10	15.00	10.00	11.10	36	23.60	22.50	17.50	18.60	51	31.10	30.00	25.00	26.10		
7	9.10	8.00	3.00	4.10	22	16.60	15.50	10.50	11.60	37	24.10	23.00	18.00	19.10	52	31.60	30.50	25.50	26.60		
8	9.60	8.50	3.50	4.60	23	17.10	16.00	11.00	12.10	38	24.60	23.50	18.50	19.60	53	32.10	31.00	26.00	27.10		
9	10.10	9.00	4.00	5.10	24	17.60	16.50	11.50	12.60	39	25.10	24.00	19.00	20.10	54	32.60	31.50	26.50	27.60		
10	10.60	9.50	4.50	5.60	25	18.10	17.00	12.00	13.10	40	25.60	24.50	19.50	20.60	55	33.10	32.00	27.00	28.10		
11	11.10	10.00	5.00	6.10	26	18.60	17.50	12.50	13.60	41	26.10	25.00	20.00	21.10	56	33.60	32.50	27.50	28.60		
12	11.60	10.50	5.50	6.60	27	19.10	18.00	13.00	14.10	42	26.60	25.50	20.50	21.60	57	34.10	33.00	28.00	29.10		
13	12.10	11.00	6.00	7.10	28	19.60	18.50	13.50	14.60	43	27.10	26.00	21.00	22.10	58	34.60	33.50	28.50	29.60		
14	12.60	11.50	6.50	7.60	29	20.10	19.00	14.00	15.10	44	27.60	26.50	21.50	22.60	59	35.10	34.00	29.00	30.10		
15	13.10	12.00	7.00	8.10	30	20.60	19.50	14.50	15.60	45	28.10	27.00	22.00	23.10	60	35.60	34.50	29.50	30.60		
16	13.60	12.50	7.50	8.60	31	21.10	20.00	15.00	16.10	46	28.60	27.50	22.50	23.60							
17	14.10	13.00	8.00	9.10	32	21.60	20.50	15.50	16.60	47	29.10	28.00	23.00	24.10							
18	14.60	13.50	8.50	9.60	33	22.10	21.00	16.00	17.10	48	29.60	28.50	23.50	24.60							

RoHS Compliant

F				DRAWN: Jerry Chen	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15	<div><div></div><div>寬德股份有限公司 <i>Neltron Industrial Co., Ltd.</i></div></div>		
E								
D				CHECKED:	UNIT: MM	DESCRIPTION: 0.5mm FPC Connector Bottom Contact Type		SIZE A4
C					SCALE: 1 : 1			
B	03-Jan-2017	圖面更新	Jamie Wang	APPROVAL: Mike Wu	SHEET: 1 / 1	PART NO: 1226-XX-02-TR		
A	07-Dec-2016		Jerry Chen					
REV	DATE	FILE	BY		PROJECTION: 