




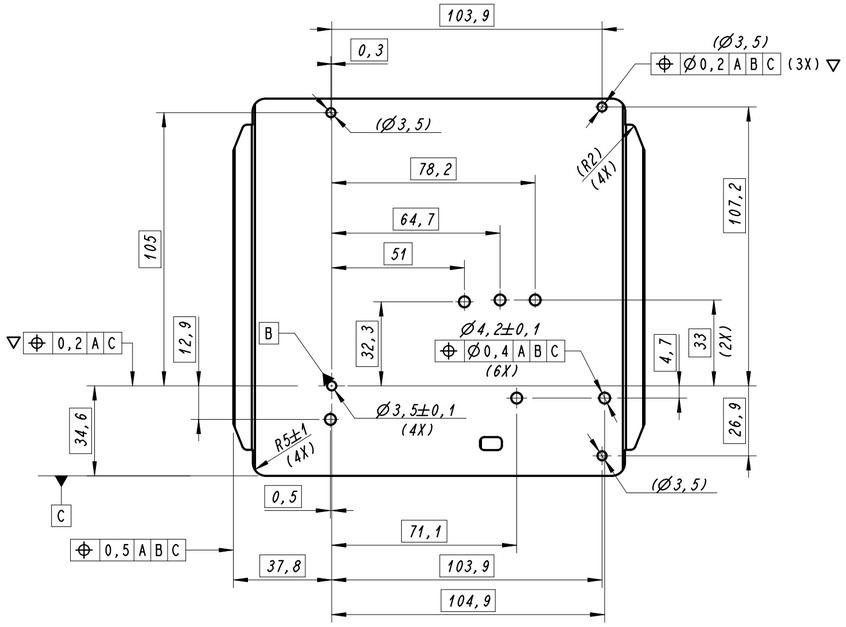


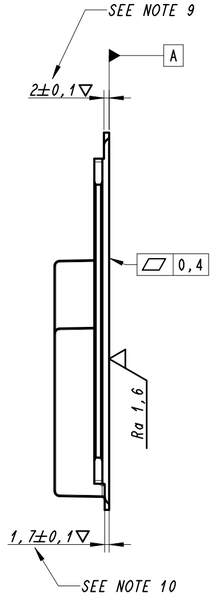


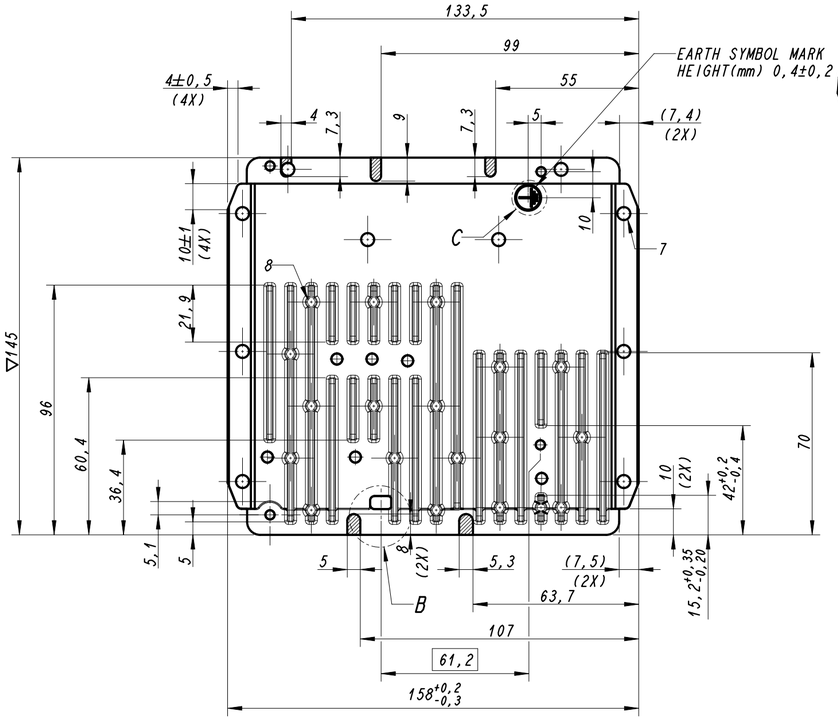

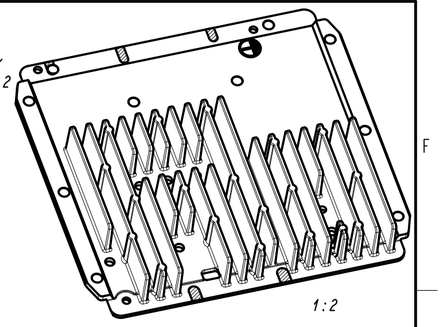

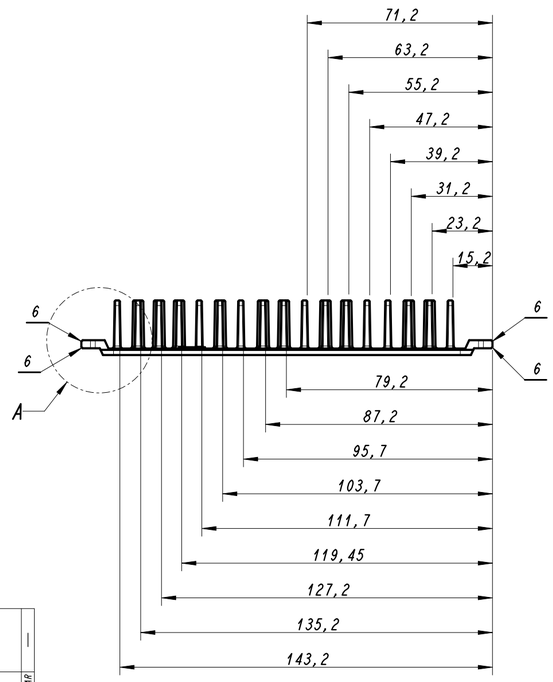



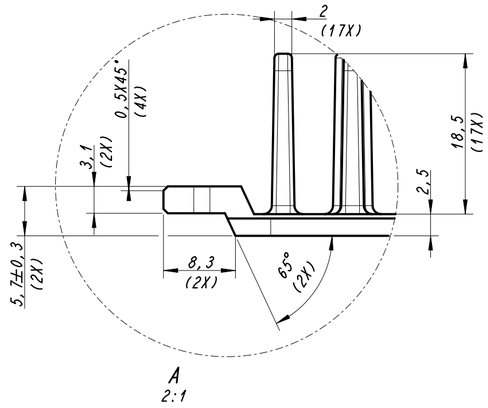

NOTES:
1 - DRAWING ACCORDING TO ISO STANDARDS, SEE TSS 002513.
2 - DIMENSIONS AND SPECIFICATIONS SIGNED WITH ▽▼⊕, SEE TSS 002470.
3 - REQUIREMENTS ABOUT HAZARDOUS SUBSTANCES ACCORDING TO TSS 002420.⊕
4 - OIL FREE.
5 - ALL PART MUST BE FREE OF BURRS AND SHARP EDGES.
6 - EDGE: ROUND OR CHANFER (RECOMMENDED 0,5mm).
7 - EXTRACTOR PIN MARKS (10X) Ø5X0,2mm (POSITION ACCORDING 3D MODEL)
8 - EXTRACTOR PINS TOWERS (19X) Ø4,6mm (POSITION ACCORDING 3D MODEL)
9 - TOLERANCE APPLIED ONLY FOR 3 HATCHED REGIONS IN FRONTAL VIEW
10 - TOLERANCE APPLIED ONLY FOR 2 HATCHED REGIONS IN FRONTAL VIEW

ECM		REVISION	LO	BY	DATE
CR22348	A	ADDED NOTE 7	A3		
		ADDED NOTE 8	A3	RBR	2024.DEC.13
		ADDED DRAFT ANGLES	-		
		ADDED RADIUS ON EDGES	-		
CR22348	B	ADDED NOTES 9 AND 10	A3	RBR	2025.JAN.10
		ADDED SURFACE ROUGHNESS	E6		
CR22348	C	0,5 WAS 0,4	D9		
		0,4 WAS 0,2	E8		
		0,6 WAS 0,2	C6		
		+0,17-0,4 WAS ±0,1	C5	RBR	2025.MAR.19
		ADDED +0,35-0,2	E2		
		ADDED +0,2-0,4	E2		
		EARTH SYM. DEPTH CHANGED	F2		
CR23455	1	INCL. EJECTOR PIN	E3	BAR	—

MATERIAL :	ALUMINUM ALLOY ADC12
CODE :	
DRAWN :	RAFAEL RECH
APP.:	CONRADO KOPPEN
ECM :	CR22348
DATE :	2024.OCT.30

embraco Nidec

TITLE, DOCUMENT TYPE: HEAT SINK

THIS MATERIAL IS CONFIDENTIAL AND PROPRIETARY TO EMBRACO, AND MAY NOT BE REPRODUCED, DISCLOSED, DISTRIBUTED OR USED WITHOUT PERMISSION

GEN. TOL. :	±0.2
ANG. TOL. :	±2°
SCALE :	3:5
UNIT: mm	A2
REPLACE:	
No.	19308765
SHEET NUMBER:	1 OF 1