

COMPONENT	DIMENSIONS	QTY
A	1150x60x22	1
B	1150x95x22	7
C	835x95x22	5
D	835x60x22	6
E	95x95x75	9
F	ANNULAR RING NAIL Ø2,1-35	66
G	ANNULAR RING NAIL Ø2,5-70	78
H	CLIP BK S25 (25x25x1,4)	16
2.998.269 ALTER. 2.206.030	ANNULAR RING NAIL Ø3-28 SCREW FOR WOOD Ø4x25	40
2.037.146	PIN FOR WOODEN PACKING	40

ON THIS AND DIAGONAL BLOCK PRINT
PRODUCTION DATE IN FORMAT MM/YY
USE INDELIBLE PAINT

NA TENTO A DIAGONALNY HRANOL POZNACIT
DATUM VYROBY VO FORMATE MM/RR
POUZIT NEZMAZATELNU FARBU

FOR ALL PLASTIC PIN 2.037.146
USE 2.998.269 ANNULAR RING FLATHEAD NAIL Ø3-28,
IN ALTERNATIVE SCREWS 2.206.030

PRE VSETKY PLASTOVE KOLIKY 2.037.146 POUZIT
2.998.269 KONVEXNY PRSTENCOVY KLINEC Ø3-28 S PLOCHOU HLAVOU,
ALTERNATIVA SKRUTKY 2.206.030

ON THIS AND DIAGONAL BLOCK PRINT
READABLE MARK IPPC
USE HEAT PRINTING

NA TENTO A DIAGONALNY HRANOL
CITATELNE UMIESTNIT ZNACKU IPPC
POUZIT TEPELNU TLAC

MIDDLE LINE BLOCKS (MAX. 5 PCS) CAN BE COMPOUNDED FROM 2 PARTS
WITH DIMENSIONS 95x95x60 AND 95x95x15 SPLICED TOGETHER
WITH 2 PCS ANNULAR RING NAILS Ø2,1-40;
SMALLER PART MUST BE WITHOUT KNOTS IN NAILED AREA,
DIMENSIONS TOLERANCE OF SPLICED BLOCKS: 95±5x95±5x75±3

HRANOLY STREDNYCH RADOV (MAX. 5 KUSOV) SA MOZU SKLADAT Z 2 CASTI
S ROZMERMY 95x95x60 A 95x95x15 SPOJENYCH
DVOMI KONVEXNYMI PRSTENCOVYMI KLINCAMI Ø2,1-40;
MENSIA CAST HRANOLU MUSI BYT BEZ UZLOV V MIESTE KLINCOVANIA,
TOLERANCIA ROZMEROV SPAJANYCH HRANOLOV: 95±5x95±5x75±3

F-66 PCS OF NAILS
POSITION AS SPECIFIED

G-24 PCS OF NAILS
POSITION AS SPECIFIED

F-66 KUŠOV KLINCŮV
AKO JE OZNACENE NA VYKRESE

G-24 KUŠOV KLINCŮV
AKO JE OZNACENE NA VYKRESE

H
ON MARKED AND ALSO
OPPOSITE SIDES (OPTIONAL)

G-27 PCS OF NAILS
POSITION AS SPECIFIED

NA VYZNACENÝCH A PROTIHLÝCH
STRANÁCH (VOLITEĽNE)

G-27 KUŠOV KLINCŮV
AKO JE OZNACENE NA VYKRESE

G-27 PCS OF NAILS
POSITION AS SPECIFIED

G-27 KUŠOV KLINCŮV
AKO JE OZNACENE NA VYKRESE

REVISION	LOG BY APP	DATE
1	17	02.10.2008
2	18	04.04.2011
3	19	06.06.2011
4	20	04.08.2014
5	21	27.10.2014

1	22	02.10.2008
2	23	04.04.2011
3	24	06.06.2011
4	25	04.08.2014
5	26	27.10.2014

Ok
New
Updated
Removed

NOTES:

- 1- PALLET MUST BE DRY (MAX. ALLOWED INTERNAL MOISTURE 23%), WITHOUT ALTERATIONS DANGEROUS FOR THE RESISTANCE/STRENGTH
- 2- THE LARGE USE OF STRIPES NOT ACCORDING TO THE DRAWING OR BARK AND CRACKS ATTENDANCE WILL ALLOW THE REJECTION OF THE ENTIRE BATCH SUPPLIED
- 3- FIXATION OF TRAVERSE ONLY WITH NAILS APPROVED BY EMBRACO TECHNICAL DEPARTMENT
- 4- SEE TSS 00PS06, TSS 002100 FOR FURTHER REQUIREMENTS
- 5- FOR MARK IPPC LOOK AT THE INTERNATIONAL STANDARD ISPM 15
- 6- REQUIREMENTS ABOUT HAZARDOUS SUBSTANCES MUST BE IN ACCORDANCE WITH THE TSS 002420
- 7- DIMENSIONS AND SPECIFICATIONS SIGNED WITH , SEE TSS 002470
- 8- ASSEMBLY JIG FOR PLASTIC PINS FIXATION MUST BE IN TOLERANCE ±1 mm
- 9- DIMENSIONS TOLERANCE OF COMPONENTS A-E: ±2 mm

POZNAMKY:

- 1- PALETA MUSI BYT SUCHA (MAX. POVOLENA VNUTORNÁ VLHKOSŤ 23%), BEZ ODCHÝLOK, KTORE SU NEBEZPEČNÉ PRE JEJ ODOLNOSŤ ALEBO PEVNOSŤ
- 2- VACSI VYSKYT DOSIEK NEZODPOVEDAJÚCICH VÝKRESU, ALEBO DOSKY S KOROU, PRÁSKLINAMI SPOSOBIA VÝRADENIE CELEJ DOBAVKY
- 3- UPEVNENIE TRAVERZ LEN POMOCOU KLINCŮV SCHVALENÝCH TECHNICKÝM ODDELENÍM EMBRACO
- 4- PRE ĎALŠIE POŽIADAVKY POZRI NORMY TSS 00PS06, TSS 002100
- 5- PRE ZNACIKU IPPC POZRI MEDZINÁRODNÝ STANDARD ISPM 15
- 6- MUSI ZODPOVEDAŤ POŽIADAVKAM O NEBEZPEČNÝCH LÁTKACH PODĽA NORMY TSS 002420
- 7- KOTÝ A SPECIFIKÁCIE OZNACENE TAKTO , POZRI TSS 002470
- 8- MONTÁŽNY PRÍPRAVOK PRE FIXACIU PLASTOVÝCH KOLÍKOV MUSI BYT V TOLERANCII ±1 mm
- 9- TOLERANCIA ROZMERŮV KOMPONENTOV A-E: ±2 mm

MATERIAL : ABETE SPRUCE SMREK	embraco	GEN. TOL. : ±4 ANG. TOL. : -- SCALE : 1:5 REPLACE 1.754.062 REV.2
CODE : DRAWN : <i>Pavol BEZILA</i> 29/10/2007 APP. : <i>Dalla VECCHIA</i> 29/10/2007 ECN : 510636	NAME BASE PALETTE FOR NEW WOODEN PACKAGING MID1 ZÁKLADNÁ PALETA PRE NOVE DREVENE BALENIE MID1	R. 1.754.062 --



COMPONENT	DIMENSIONS	QTY
A	1150x60x22	1
B	1150x95x22	7
C	835x95x22	5
D	835x60x22	6
E	95x95x75	9
F	ANNULAR RING NAIL Ø2,1-35	66
G	ANNULAR RING NAIL Ø2,5-70	78
H	CLIP BK S25 (25x25x1,4)	16
2998269 ALTER. 2206030	ANNULAR RING NAIL Ø3-28 SCREW FOR WOOD Ø4x25	40
2037146	PIN FOR WOODEN PACKING	40
F	835x95x22	2
GLUE	APPLY EVENLY	

ON THIS AND DIAGONAL BLOCK PRINT
PRODUCTION DATE IN FORMAT MM/YY
USE INDELIBLE PAINT

FOR ALL PLASTIC PIN 2037146
USE 2998269 ANNULAR RING FLATHEAD NAIL Ø3-28,
IN ALTERNATIVE SCREWS 2206030

ON THIS AND DIAGONAL BLOCK PRINT
READABLE MARK IPPC
USE HEAT PRINTING

MIDDLE LINE BLOCKS (MAX. 5 PCS) CAN BE COMPOUNDED FROM 2 PARTS
WITH DIMENSIONS 95x95x60 AND 95x95x15 SPLICED TOGETHER
WITH 2 PCS ANNULAR RING NAILS Ø2,1-40;
SMALLER PART MUST BE WITHOUT KNOTS IN NAILED AREA,
DIMENSIONS TOLERANCE OF SPLICED BLOCKS: 95±5x95±5x75±3

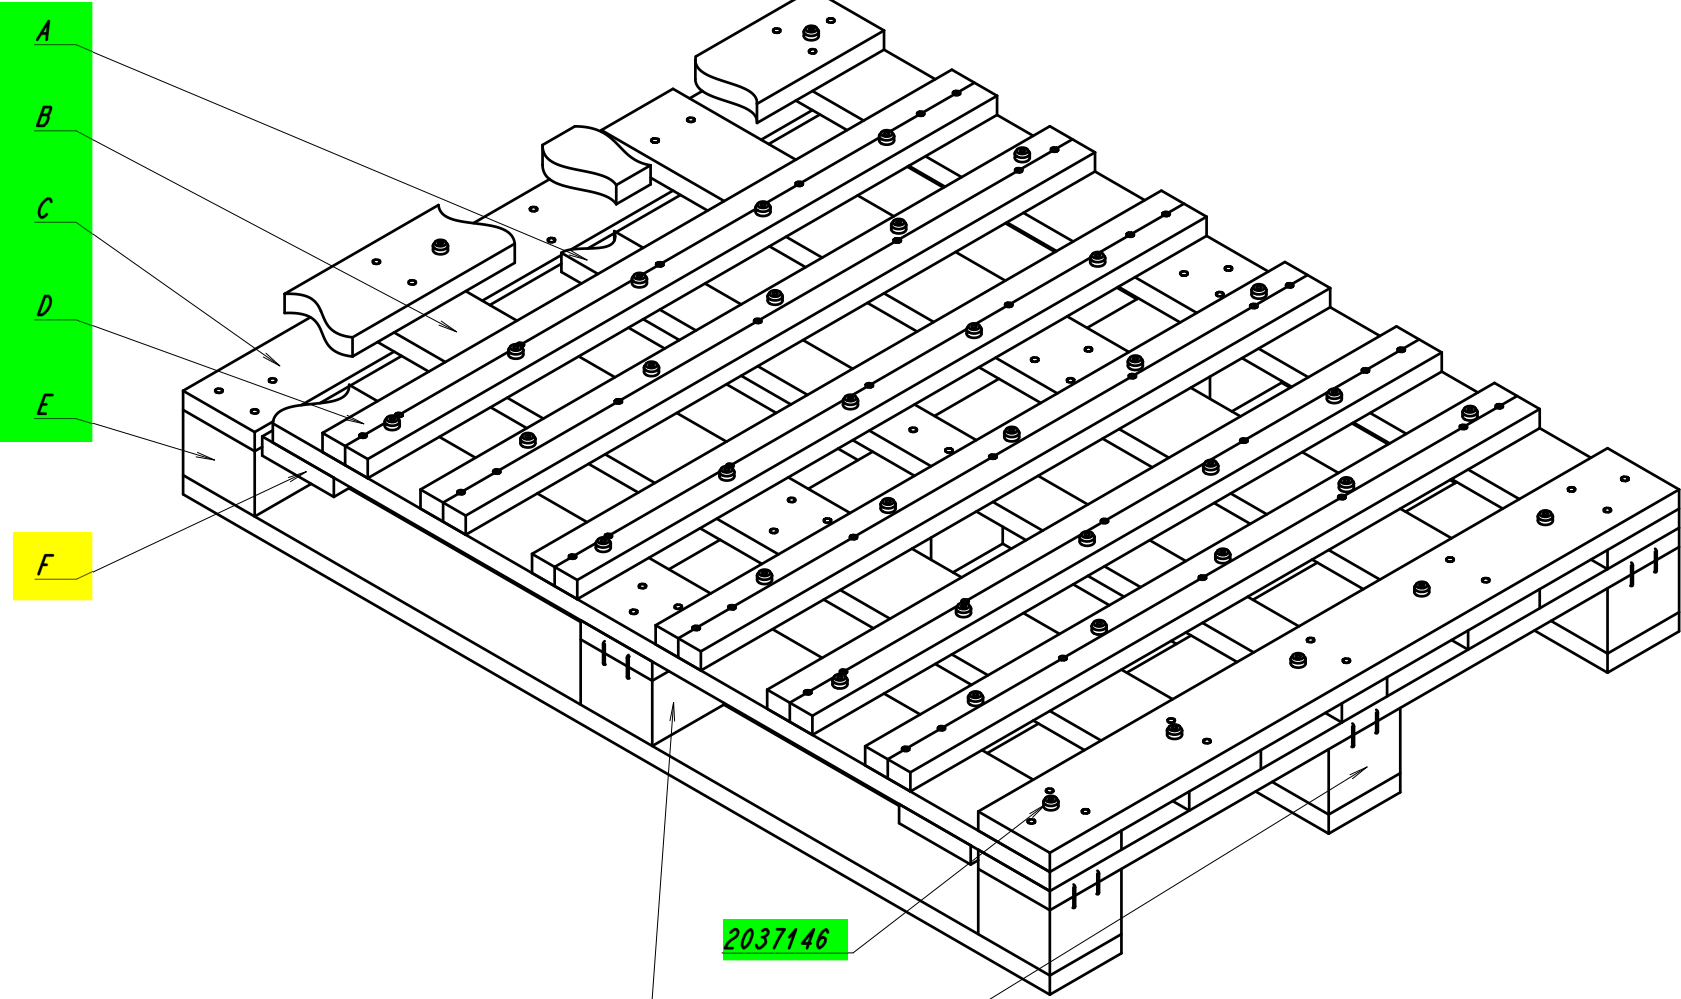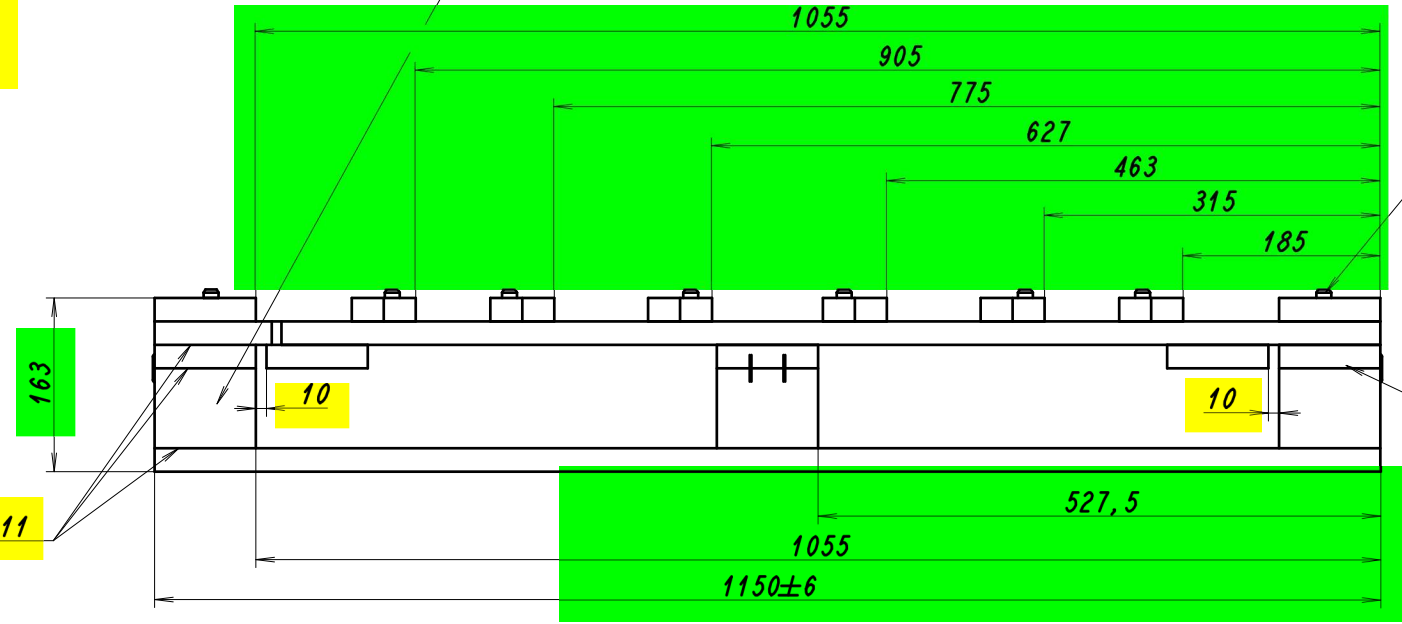


F-66 PCS OF NAILS
POSITION AS SPECIFIED




G-24 PCS OF NAILS
POSITION AS SPECIFIED

H
ON MARKED AND ALSO
OPPOSITE SIDES (OPTIONAL)

G-27 PCS OF NAILS
POSITION AS SPECIFIED

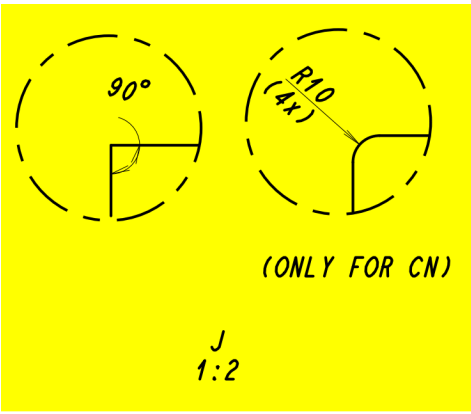

G-27 PCS OF NAILS
POSITION AS SPECIFIED

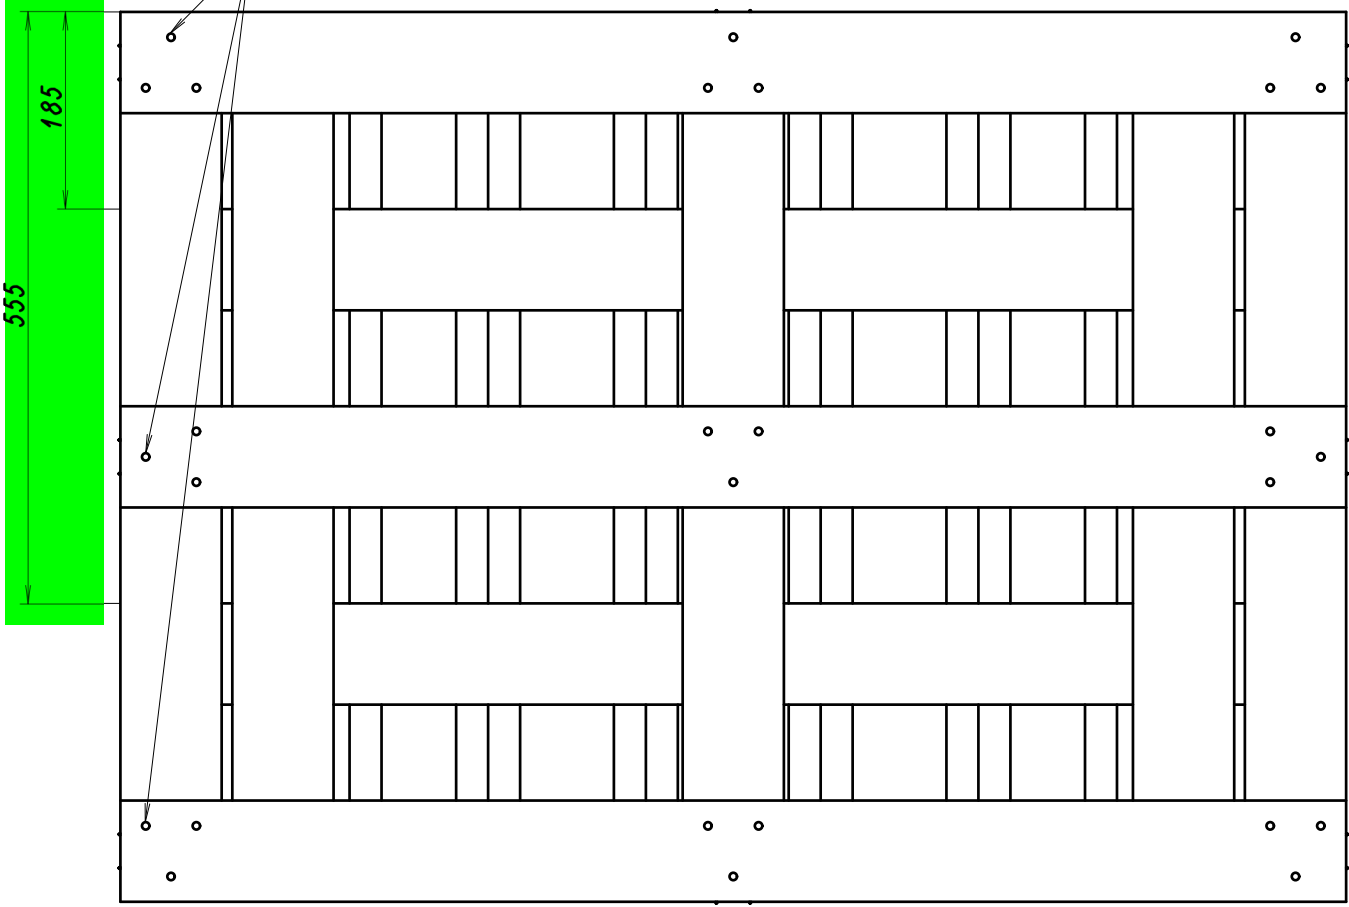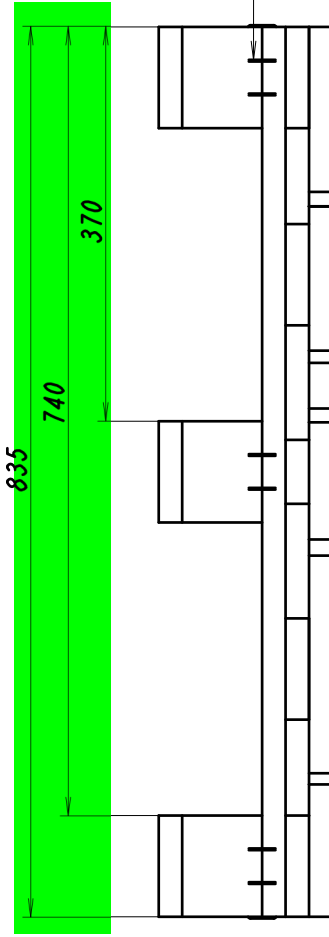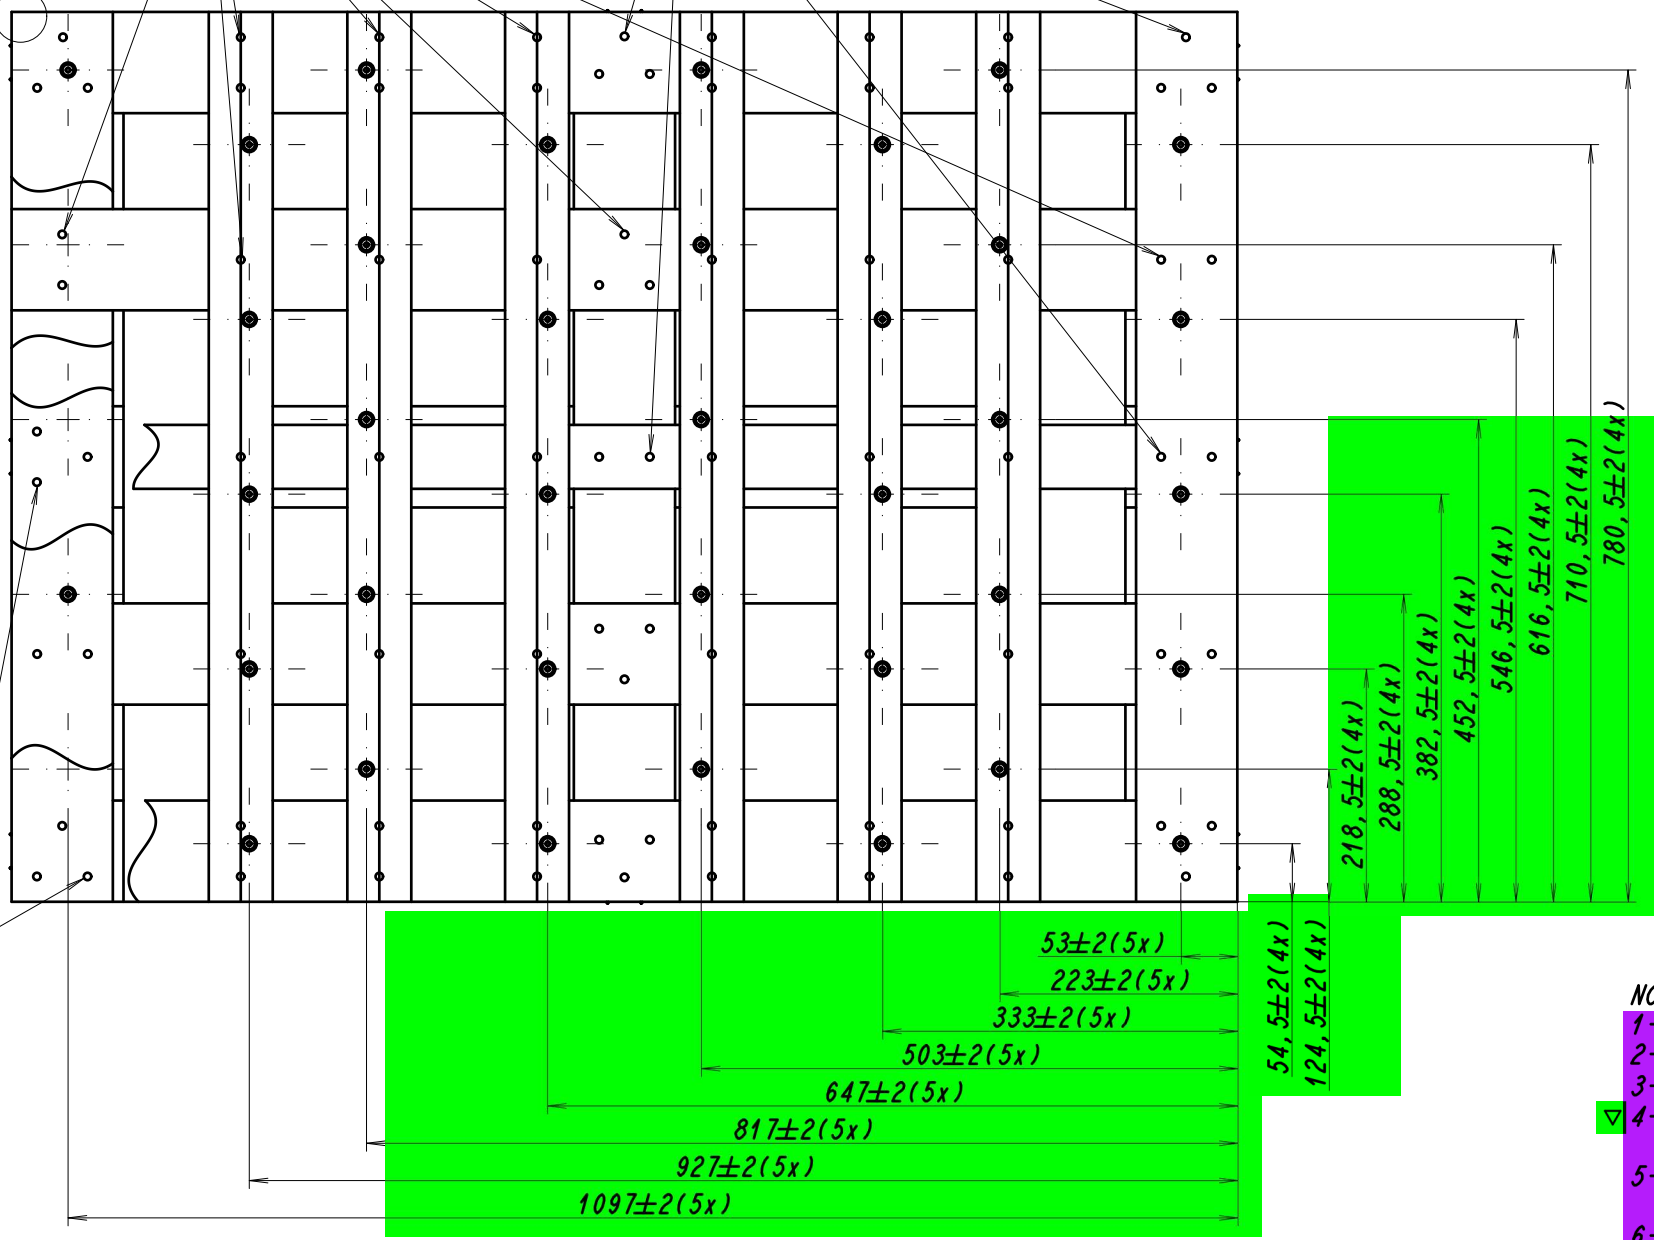

- NOTES:
- 1-DRAWING ACCORDING TO ISO STANDARDS, SEE TSS 002513.
 - 2-DIMENSIONS AND SPECIFICATIONS SIGNED WITH SEE TSS 002470.
 - 3-REQUIREMENTS ABOUT HAZARDOUS SUBSTANCES ACCORDING TO TSS 02420.
 - 4-PALLET MUST BE DRY (MAX. ALLOWED INTERNAL MOISTURE 23%), WITHOUT ALTERATIONS DANGEROUS FOR THE RESISTANCE/STRENGTH
 - 5-THE LARGE USE OF STRIPES NOT ACCORDING TO THE DRAWING OR BARK AND CRACKS ATTENDANCE WILL ALLOW THE REJECTION OF THE ENTIRE BATCH SUPPLIED
 - 6-FIXATION OF TRAVERSE ONLY WITH NAILS APPROVED BY EMBRACO TECHNICAL DEPARTMENT
 - 7-SEE TSS 00PS06, TSS 002100 FOR FURTHER REQUIREMENTS
 - 8-FOR MARK IPPC LOOK AT THE INTERNATIONAL STANDARD ISPM 15
 - 9-ASSEMBLY JIG FOR PLASTIC PINS FIXATION MUST BE IN TOLERANCE ±1 mm
 - 10-DIMENSIONS TOLERANCE OF COMPONENTS A-E: ±2 mm
 - 11-EVERY WOODEN PIER NEED GLUED.
 - 12-COMPONENT F AND GLUE ONLY USED IN CN PLANT.

REVISION	LO	BY	DATE
01	1	1	15.08.2007
02	1	1	27.08.2014
03	1	1	15.08.2007
04	1	1	27.08.2014
05	1	1	15.08.2007
06	1	1	27.08.2014
07	1	1	15.08.2007
08	1	1	27.08.2014
09	1	1	15.08.2007
10	1	1	27.08.2014
11	1	1	15.08.2007
12	1	1	27.08.2014

- Ok
- New
- Updated
- Removed

PART NO.	PROCESS
1754062	NORMAL
14051282	FUMIGATION

MATERIAL : SPRUCE	embraco Nidec	GEN. TOL. : ±4
CODE :	TITLE, DOCUMENT TYPE BASE PALLETTE FOR NEW WOODEN PACKAGING MID1	ANG. TOL. : --
DRAWN : PAVOL BEZILA		SCALE : 1:5
APP. : DALLA VECCHIA		UNIT: mm
ECN : 510636	DATE : 29.OCT.2007	REPLACE: 1754062 REV.5
THIS MATERIAL IS CONFIDENTIAL AND PROPRIETARY TO EMBRACO. IT MAY NOT BE REPRODUCED, DISCLOSED, DISTRIBUTED OR USED WITHOUT PERMISSION.		No. 1754062
		SHEET NUMBER: 1 OF 1