


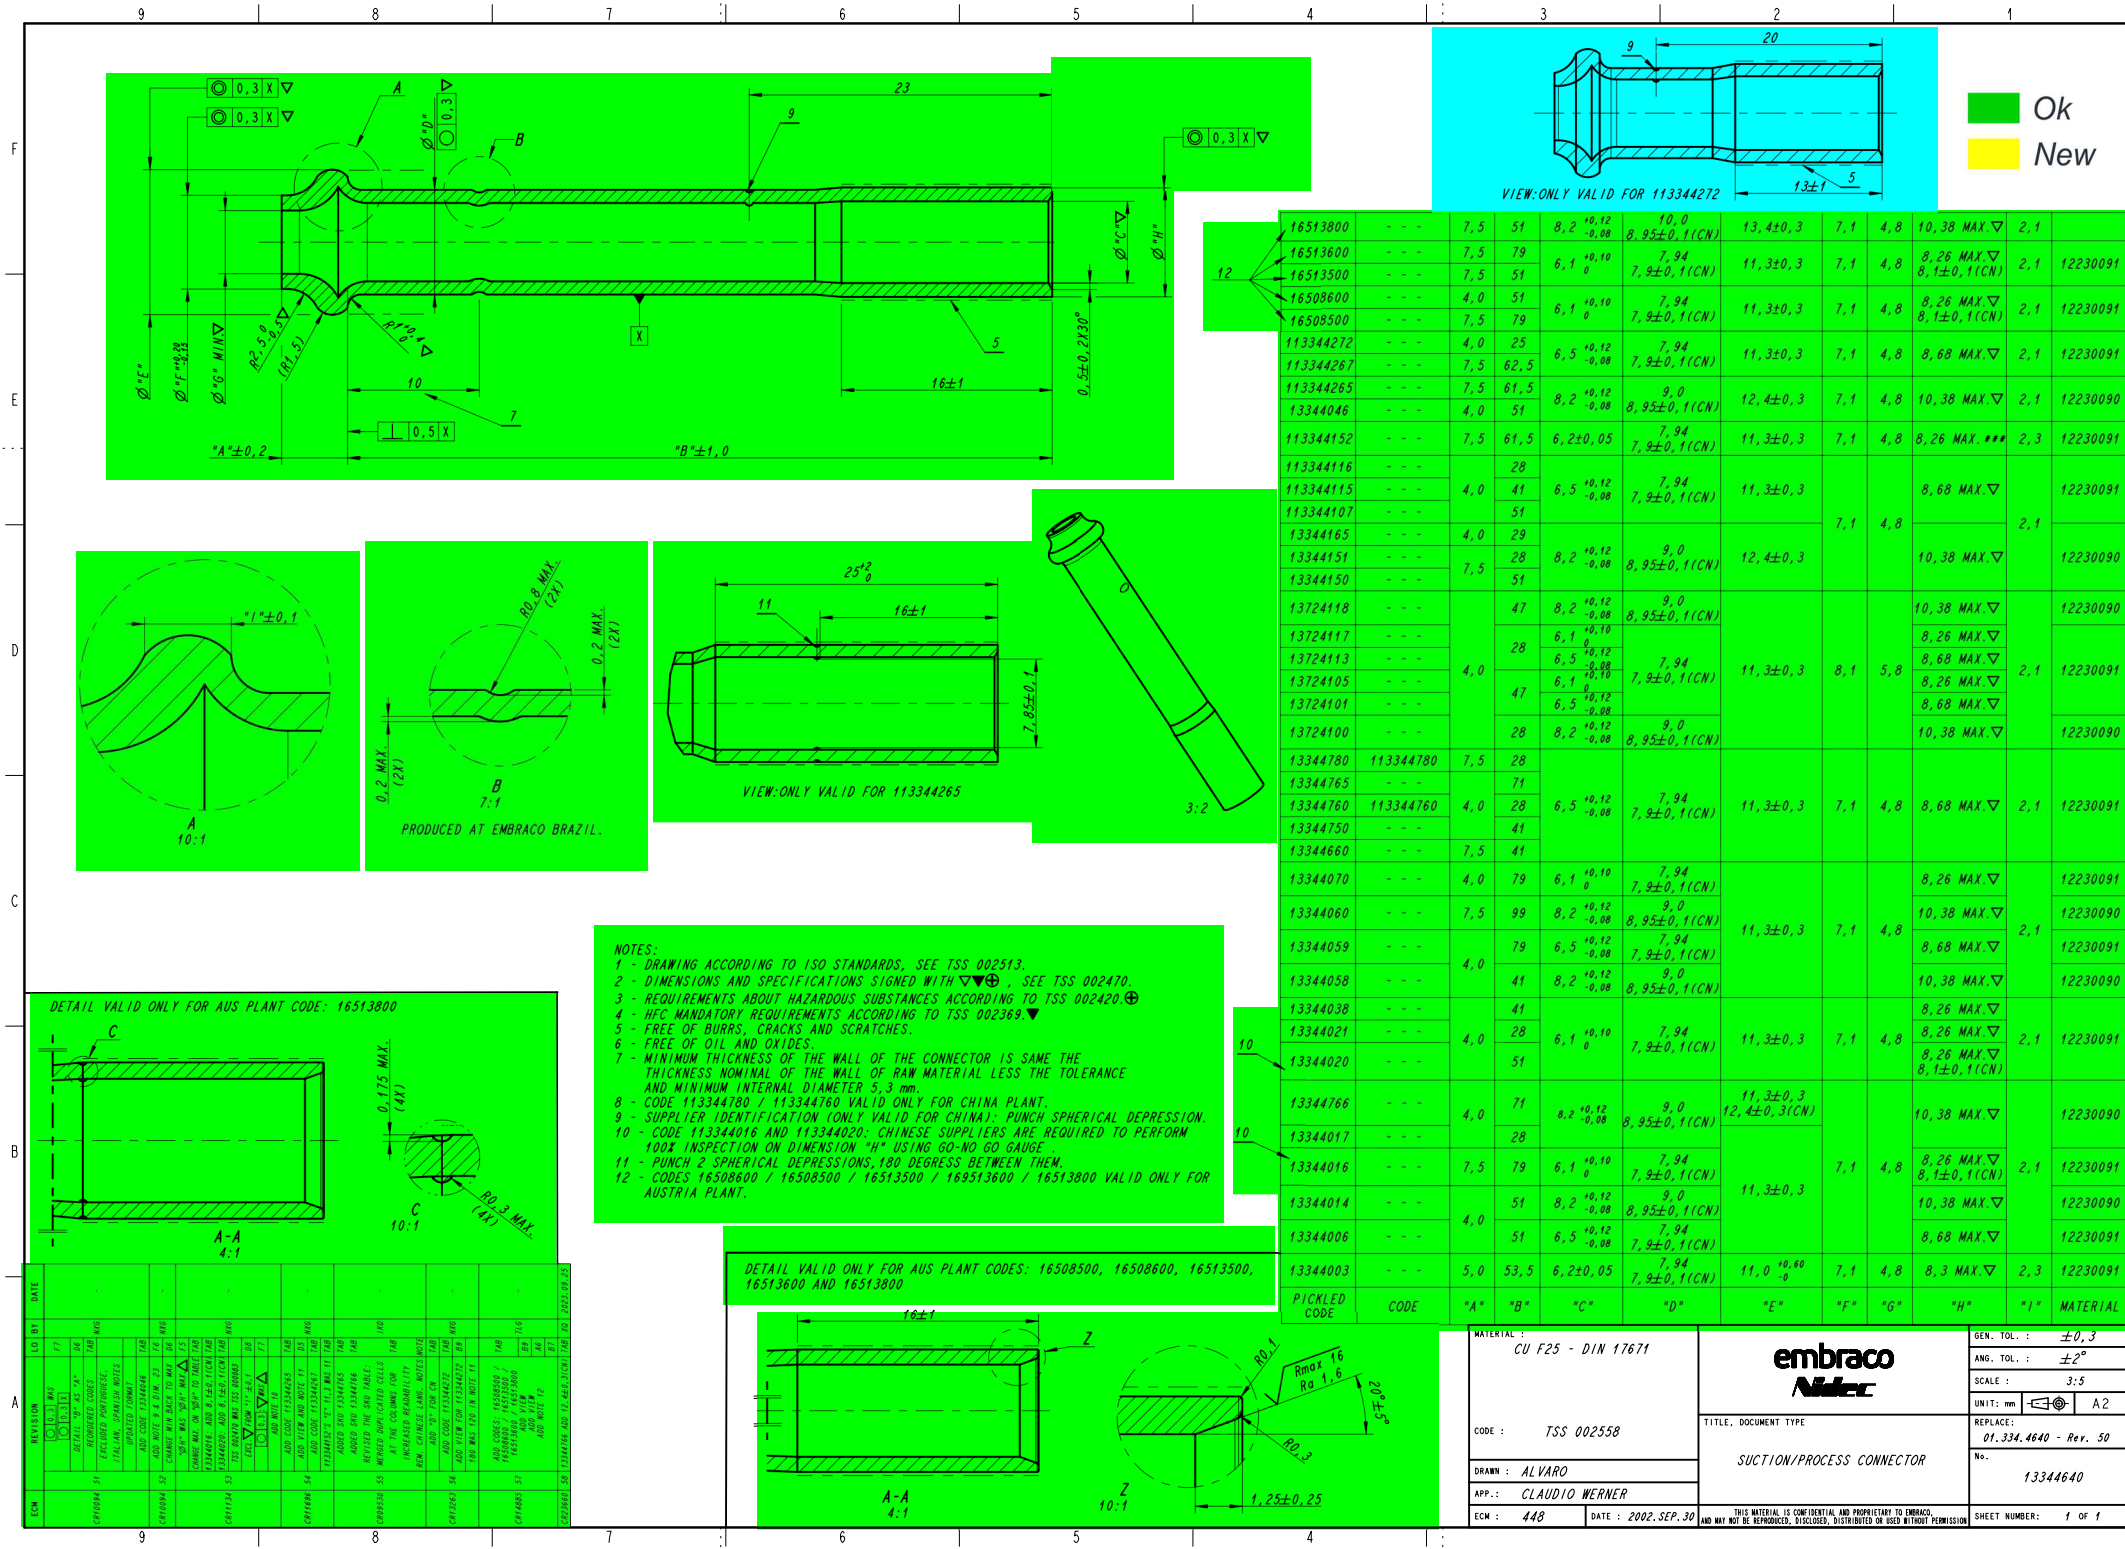
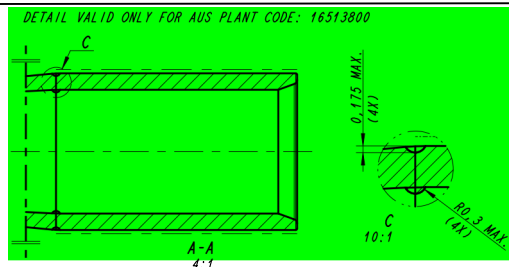
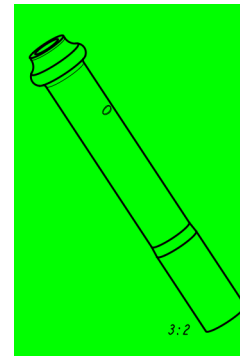
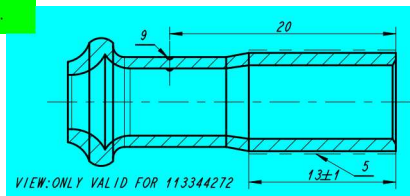
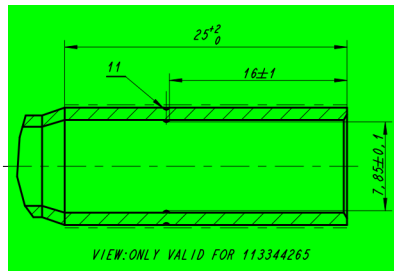





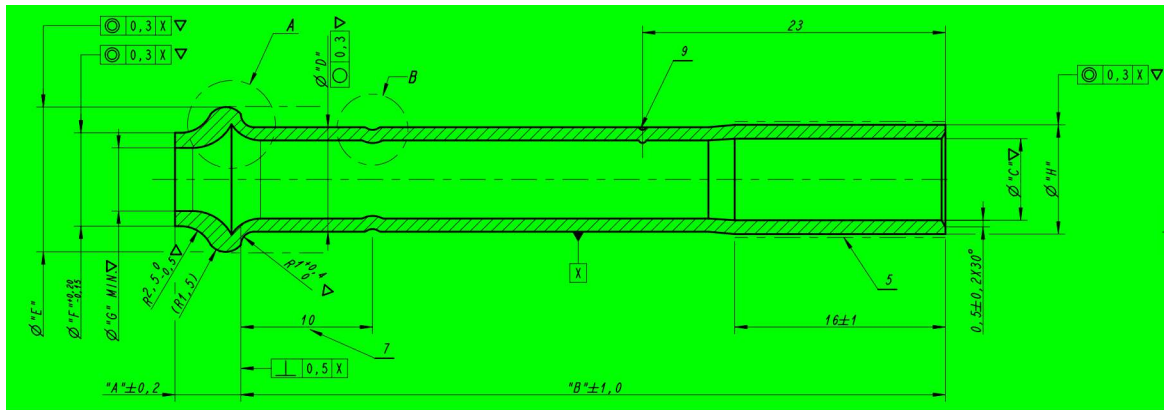

NOTES:
 1 - DRAWING ACCORDING TO ISO STANDARDS, SEE TSS 002513.
 2 - DIMENSIONS AND SPECIFICATIONS SIGNED WITH ∇ AND $\oplus$, SEE TSS 002470.
 3 - REQUIREMENTS ABOUT HAZARDOUS SUBSTANCES ACCORDING TO TSS 002420 $\oplus$.
 4 - HFC MANDATORY REQUIREMENTS ACCORDING TO TSS 002369. ∇
 5 - FREE OF BURRS, CRACKS AND SCRATCHES.
 6 - FREE OF OIL AND OXIDES.
 7 - MINIMUM THICKNESS OF THE WALL OF THE CONNECTOR IS SAME THE THICKNESS NOMINAL OF THE WALL OF RAW MATERIAL LESS THE TOLERANCE AND MINIMUM INTERNAL DIAMETER 5.3 mm.
 8 - CODE 113344780 / 113344760 VALID ONLY FOR CHINA PLANT.
 9 - SUPPLIER IDENTIFICATION (ONLY VALID FOR CHINA): PUNCH SPHERICAL DEPRESSION.
 10 - CODE 113344016 AND 113344020: CHINESE SUPPLIERS ARE REQUIRED TO PERFORM 100% INSPECTION ON DIMENSION "H" USING GO-NO GO GAUGE.
 11 - PUNCH 2 SPHERICAL DEPRESSIONS, 180 DEGREES BETWEEN THEM.
 12 - CODES 16508600 / 16508500 / 16513500 / 16513600 / 16513800 VALID ONLY FOR AUSTRIA PLANT.

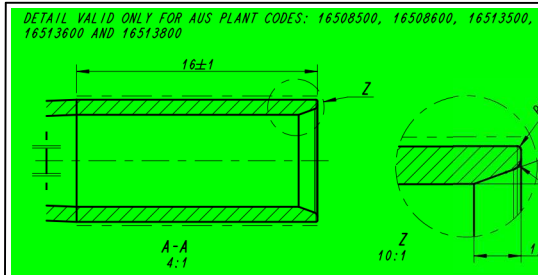

Ok
 New
 Updated

13344155	- - -	4,0	55	6,5 ±0,05	7,94 7,9 ±0,1 (CN)	11,3 ±0,3	8,1	5,8	8,66 MAX.	2,1	12230091
16513800	- - -	7,5	51	8,2 ±0,12 -0,08	10,0 8,95 ±0,1 (CN)	13,4 ±0,3	7,1	4,8	10,38 MAX. ∇	2,1	
16513600	- - -	7,5	79	6,1 ±0,10 0	7,94 7,9 ±0,1 (CN)	11,3 ±0,3	7,1	4,8	8,26 MAX. ∇ 8,1 ±0,1 (CN)	2,1	12230091
16513500	- - -	7,5	51	6,1 ±0,10 0	7,94 7,9 ±0,1 (CN)	11,3 ±0,3	7,1	4,8	8,26 MAX. ∇ 8,1 ±0,1 (CN)	2,1	12230091
16508600	- - -	4,0	51	6,1 ±0,10 0	7,94 7,9 ±0,1 (CN)	11,3 ±0,3	7,1	4,8	8,26 MAX. ∇ 8,1 ±0,1 (CN)	2,1	12230091
16508500	- - -	7,5	79	6,1 ±0,10 0	7,94 7,9 ±0,1 (CN)	11,3 ±0,3	7,1	4,8	8,26 MAX. ∇ 8,1 ±0,1 (CN)	2,1	12230091
113344272	- - -	4,0	25	6,5 ±0,12 -0,08	7,94 7,9 ±0,1 (CN)	11,3 ±0,3	7,1	4,8	8,68 MAX. ∇	2,1	12230091
113344267	- - -	7,5	62,5	6,5 ±0,12 -0,08	7,94 7,9 ±0,1 (CN)	11,3 ±0,3	7,1	4,8	8,68 MAX. ∇	2,1	12230091
113344265	- - -	7,5	61,5	8,2 ±0,12 -0,08	9,0 8,95 ±0,1 (CN)	12,4 ±0,3	7,1	4,8	10,38 MAX. ∇	2,1	12230090
13344046	- - -	4,0	51	8,2 ±0,12 -0,08	8,95 ±0,1 (CN)	12,4 ±0,3	7,1	4,8	10,38 MAX. ∇	2,1	12230090
113344152	- - -	7,5	61,5	6,2 ±0,05	7,94 7,9 ±0,1 (CN)	11,3 ±0,3	7,1	4,8	8,26 MAX. ∇	2,3	12230091
113344116	- - -	- - -	28	- - -	- - -	- - -	- - -	- - -	- - -	- - -	- - -
113344115	- - -	4,0	41	6,5 ±0,12 -0,08	7,94 7,9 ±0,1 (CN)	11,3 ±0,3	- - -	- - -	8,68 MAX. ∇	- - -	12230091
113344107	- - -	- - -	51	- - -	- - -	- - -	- - -	- - -	- - -	2,1	- - -
13344165	- - -	4,0	29	- - -	- - -	- - -	7,1	4,8	- - -	- - -	- - -
13344151	- - -	- - -	28	8,2 ±0,12 -0,08	9,0 8,95 ±0,1 (CN)	12,4 ±0,3	- - -	- - -	10,38 MAX. ∇	- - -	12230090
13344150	- - -	7,5	51	- - -	- - -	- - -	- - -	- - -	- - -	- - -	- - -
13724118	- - -	- - -	47	8,2 ±0,12 -0,08	9,0 8,95 ±0,1 (CN)	- - -	- - -	- - -	10,38 MAX. ∇	- - -	12230090
13724117	- - -	- - -	- - -	6,1 ±0,10 0	- - -	- - -	- - -	- - -	8,26 MAX. ∇	- - -	- - -
13724113	- - -	- - -	28	6,5 ±0,12 -0,08	7,94 7,9 ±0,1 (CN)	11,3 ±0,3	8,1	5,8	8,68 MAX. ∇	2,1	12230091
13724105	- - -	- - -	47	6,1 ±0,12 -0,08	7,94 7,9 ±0,1 (CN)	- - -	- - -	- - -	8,26 MAX. ∇	- - -	- - -
13724101	- - -	- - -	- - -	6,5 ±0,12 -0,08	- - -	- - -	- - -	- - -	8,68 MAX. ∇	- - -	- - -
13724100	- - -	- - -	28	8,2 ±0,12 -0,08	9,0 8,95 ±0,1 (CN)	- - -	- - -	- - -	10,38 MAX. ∇	- - -	12230090
13344780	113344780	7,5	28	- - -	- - -	- - -	- - -	- - -	- - -	- - -	- - -
13344765	- - -	- - -	71	- - -	- - -	- - -	- - -	- - -	- - -	- - -	- - -
13344760	113344760	4,0	28	6,5 ±0,12 -0,08	7,94 7,9 ±0,1 (CN)	11,3 ±0,3	7,1	4,8	8,68 MAX. ∇	2,1	12230091
13344750	- - -	- - -	41	- - -	- - -	- - -	- - -	- - -	- - -	- - -	- - -
13344660	- - -	7,5	41	- - -	- - -	- - -	- - -	- - -	- - -	- - -	- - -
13344070	- - -	4,0	79	6,1 ±0,10 0	7,94 7,9 ±0,1 (CN)	- - -	- - -	- - -	8,26 MAX. ∇	- - -	12230091
13344060	- - -	7,5	99	8,2 ±0,12 -0,08	9,0 8,95 ±0,1 (CN)	11,3 ±0,3	7,1	4,8	10,38 MAX. ∇	2,1	12230090
13344059	- - -	- - -	79	6,5 ±0,12 -0,08	7,94 7,9 ±0,1 (CN)	- - -	- - -	- - -	8,68 MAX. ∇	- - -	12230091
13344058	- - -	4,0	41	8,2 ±0,12 -0,08	9,0 8,95 ±0,1 (CN)	- - -	- - -	- - -	10,38 MAX. ∇	- - -	12230090
13344038	- - -	- - -	41	- - -	- - -	- - -	- - -	- - -	8,26 MAX. ∇	- - -	- - -
13344021	- - -	4,0	28	6,1 ±0,10 0	7,94 7,9 ±0,1 (CN)	11,3 ±0,3	7,1	4,8	8,26 MAX. ∇ 8,1 ±0,1 (CN)	2,1	12230091
13344020	- - -	- - -	51	- - -	- - -	- - -	- - -	- - -	- - -	- - -	- - -
13344766	- - -	4,0	71	8,2 ±0,12 -0,08	9,0 8,95 ±0,1 (CN)	11,3 ±0,3 12,4 ±0,3 (CN)	- - -	- - -	10,38 MAX. ∇	- - -	12230090
13344017	- - -	- - -	28	- - -	- - -	- - -	- - -	- - -	- - -	- - -	- - -
13344016	- - -	7,5	79	6,1 ±0,10 0	7,94 7,9 ±0,1 (CN)	- - -	7,1	4,8	8,26 MAX. ∇ 8,1 ±0,1 (CN)	2,1	12230091
13344014	- - -	- - -	51	8,2 ±0,12 -0,08	9,0 8,95 ±0,1 (CN)	11,3 ±0,3	- - -	- - -	10,38 MAX. ∇	- - -	12230090
13344006	- - -	4,0	51	6,5 ±0,12 -0,08	7,94 7,9 ±0,1 (CN)	- - -	- - -	- - -	8,68 MAX. ∇	- - -	12230091
13344003	- - -	5,0	53,5	6,2 ±0,05	7,94 7,9 ±0,1 (CN)	11,0 ±0,60 -0	7,1	4,8	8,3 MAX. ∇	2,3	12230091
PICKLED CODE	CODE	"A"	"B"	"C"	"D"	"E"	"F"	"G"	"H"	"I"	MATERIAL

MATERIAL : CU F25 - DIN 17671		embraco Nidtec		GEN. TOL. : ±0,3
CODE : TSS 002558		TITLE, DOCUMENT TYPE SUCTION/PROCESS CONNECTOR		ANG. TOL. : ±2°
DRAWN : ALVARO		REPLACE : 01.334.4640 - Rev. 50		SCALE : 3:5
APP. : CLAUDIO WERNER		No. 13344640		UNIT: mm A2
ECN : 448	DATE : 2002.SEP.30	THIS MATERIAL IS CONFIDENTIAL AND PROPRIETARY TO EMBRACO, AND MAY NOT BE REPRODUCED, DISCLOSED, DISTRIBUTED OR USED WITHOUT PERMISSION		SHEET NUMBER: 1 of 1