

E

D

C

B

A


E

D


C

B

A

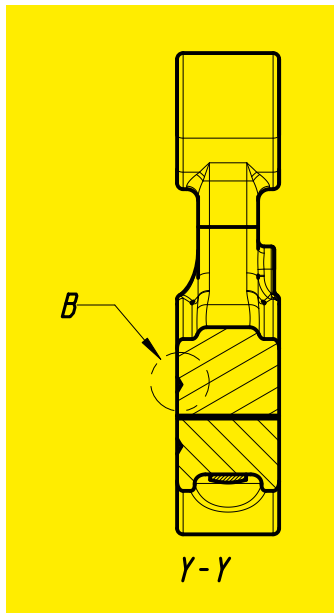

Y-Y

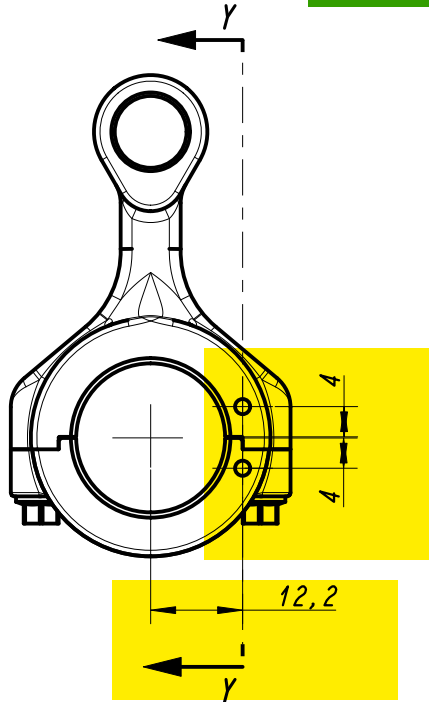

SEE NOTE 6

CHECK IN HORIZONTAL AND VERTICAL POSITION

0,05/127 X

0,0025

10

45°

0,7±0,5



20

X

0,0025


DIAMONDING ON 20 MICROINCHES BEFORE ROLLING

SEE NOTE 10

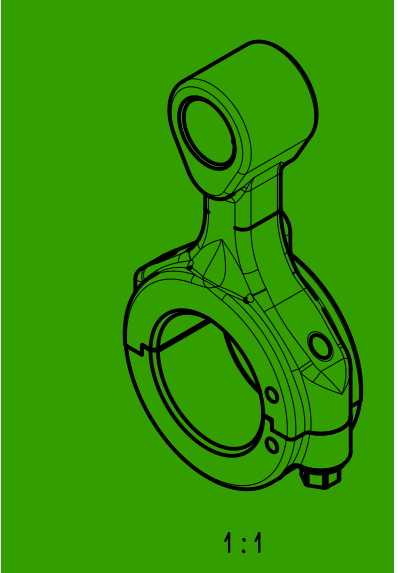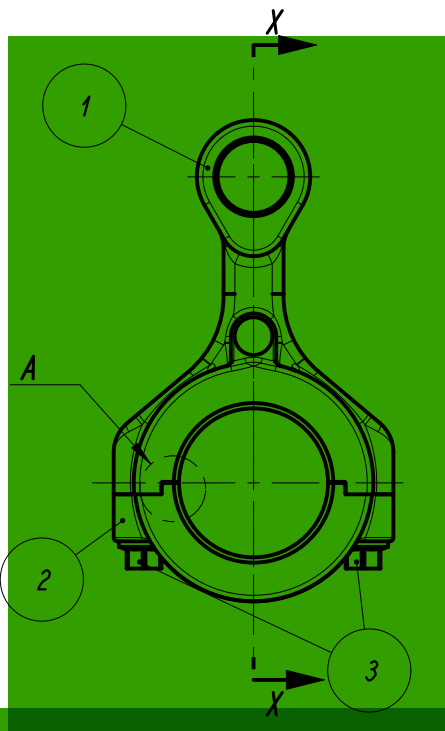


1:1

- NOTES:
- 1 - DRAWING ACCORDING TO ISO STANDARDS, SEE TSS 002513.
 - 2 - DIMENSIONS AND SPECIFICATIONS SIGNED WITH $\nabla\nabla\oplus$, SEE TSS 002470.
 - 3 - REQUIREMENTS ABOUT HAZARDOUS SUBSTANCES ACCORDING TO TSS 002420. $\oplus$
 - 4 - HFC MANDATORY REQUIREMENTS ACCORDING TO TSS 002369. ∇
 - 5 - MUST BE CLEAN AND WITHOUT BURRS. ∇
 - 6 - BEFORE MACHINING TIGHT SCREWS BY TORQUE DEFINED IN TSS 00AA04 STANDARD. ∇
 - 7 - MUST FULL FILL REQUIREMENTS OF STANDARD TSS 000E66.
 - 8 - ROUGHNESS IN MICROINCHES.
 - 9 - MACHINED CONNECTING ROD AFTER OPENING AND CLOSING BOTTOM REAR; MUST NOT TO HAVE ERROR OF CYLINDRICITY MORE THAN 0.0035.
 - 10 - APPLY STANDARD TSS 0AFA03 FOR SELECTIVE ASSEMBLY; APPLY STANDARD TSS 00AA02 FOR COUPLING IN TOLERANCE LIMITS; ∇ APPLY STANDARD TSS 00H210 FOR POROSITY.
 - 11 - CLEARANCE BETWEEN CAP AND BODY AFTER ITS ASSEMBLY AND SCREWS TIGHTENED BY DEFINED TORQUE.

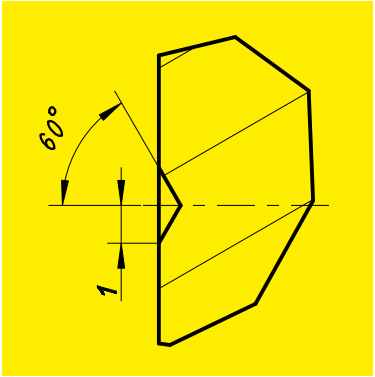

B
5:1

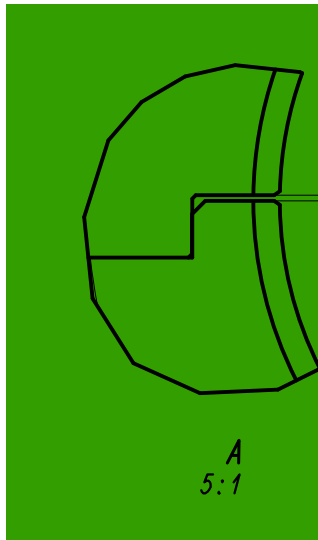

A
5:1

0,05 - 0,15

SEE NOTE 11

1005012	CN	213336912	3	2201086
			2	2009012
			1	2008012
	SK	--	3	2201086
			2	2009012
			1	2008012
CODE	PLANT	PRE MACHINED	RAW MATERIAL	

MATERIAL : SEE TABLE		embraco Nidec	GEN. TOL. : ±0.25	
			ANG. TOL. : ±1/2°	
			SCALE : 1:1	
			UNIT: mm	 A3
CODE :		TITLE, DOCUMENT TYPE CONNECTING ROD ASSEMBLY	REPLACE: 1005045	
DRAWN : MILOS CAJA			No. 1005012	
APP.: ROBERT REICH				
ECM : CR18170	DATE : 31.03.2023		THIS MATERIAL IS CONFIDENTIAL AND PROPRIETARY TO EMBRACO, AND MAY NOT BE REPRODUCED, DISCLOSED, DISTRIBUTED OR USED WITHOUT PERMISSION	
		SHEET NUMBER: 1 OF 1		

OLD
NEW

ECM	REVISION	LO	BY	DATE
CR30011	1	213336912	WAS	213336908
CR33568	2	ADD TWO MARKING HOLES	D5	LIV