


COMPONENTS	DIMENSIONS	QTY
A	835x60x25	6
B	835x95x25	2
C	1150x20x15	2
D	1150x30x15	4
E	835x20x15	2
G	ANNULAR RING NAIL Ø2,1-30	104
2.998.269 ALTER. 2.206.030	ANNULAR RING NAIL Ø3-28 SCREW FOR WOOD Ø4x25	40
2.037.146	PIN FOR WOODEN PACKING	40

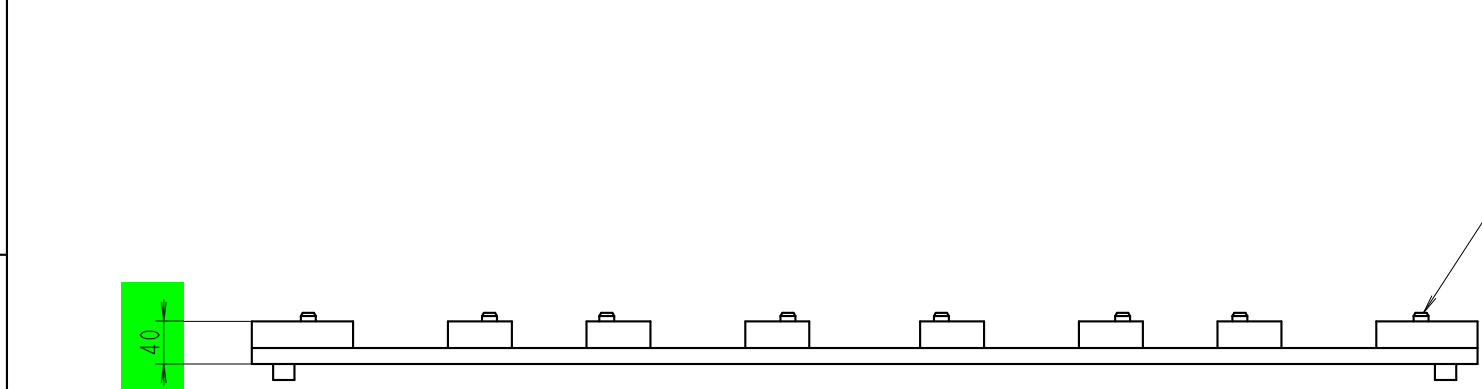

FOR ALL PLASTIC PIN 2.037.146 USE
2.998.269 ANNULAR RING FLATHEAD NAILS Ø3-28,
IN ALTERNATIVE SCREWS 2.206.030

PRE VSETKY PLASTOVE KOLIKY 2.037.146 POUZIT
2.998.269 KONVEXNE PRSTENCOVE KLINCE Ø3-28
S PLOCHOU HLAVOU, ALTERNATIVA SKRUTKY 2.206.030





G-96 PCS OF NAILS
POSITION AS SPECIFIED

G-96 KUSOV KLINCOV
AKO JE OZNACENE NA VYKRESE

ON TOP SIDE OF ONE OF THIS SLATS PRINT MARK IPPC
USE HEAT PRINTING
AND PRINT PRODUCTION DATE IN FORMAT MM/YY
USE INDELIBLE PAINT

NA HORNU STRANU JEDNEJ Z TYCHTO DOSAK
POUZIT TEPELNU TLAC
A POZNACIT DATUM VYROBY VO FORMATE MM/RR
POUZIT NEZMAZATELNU FARBU

2.037.146

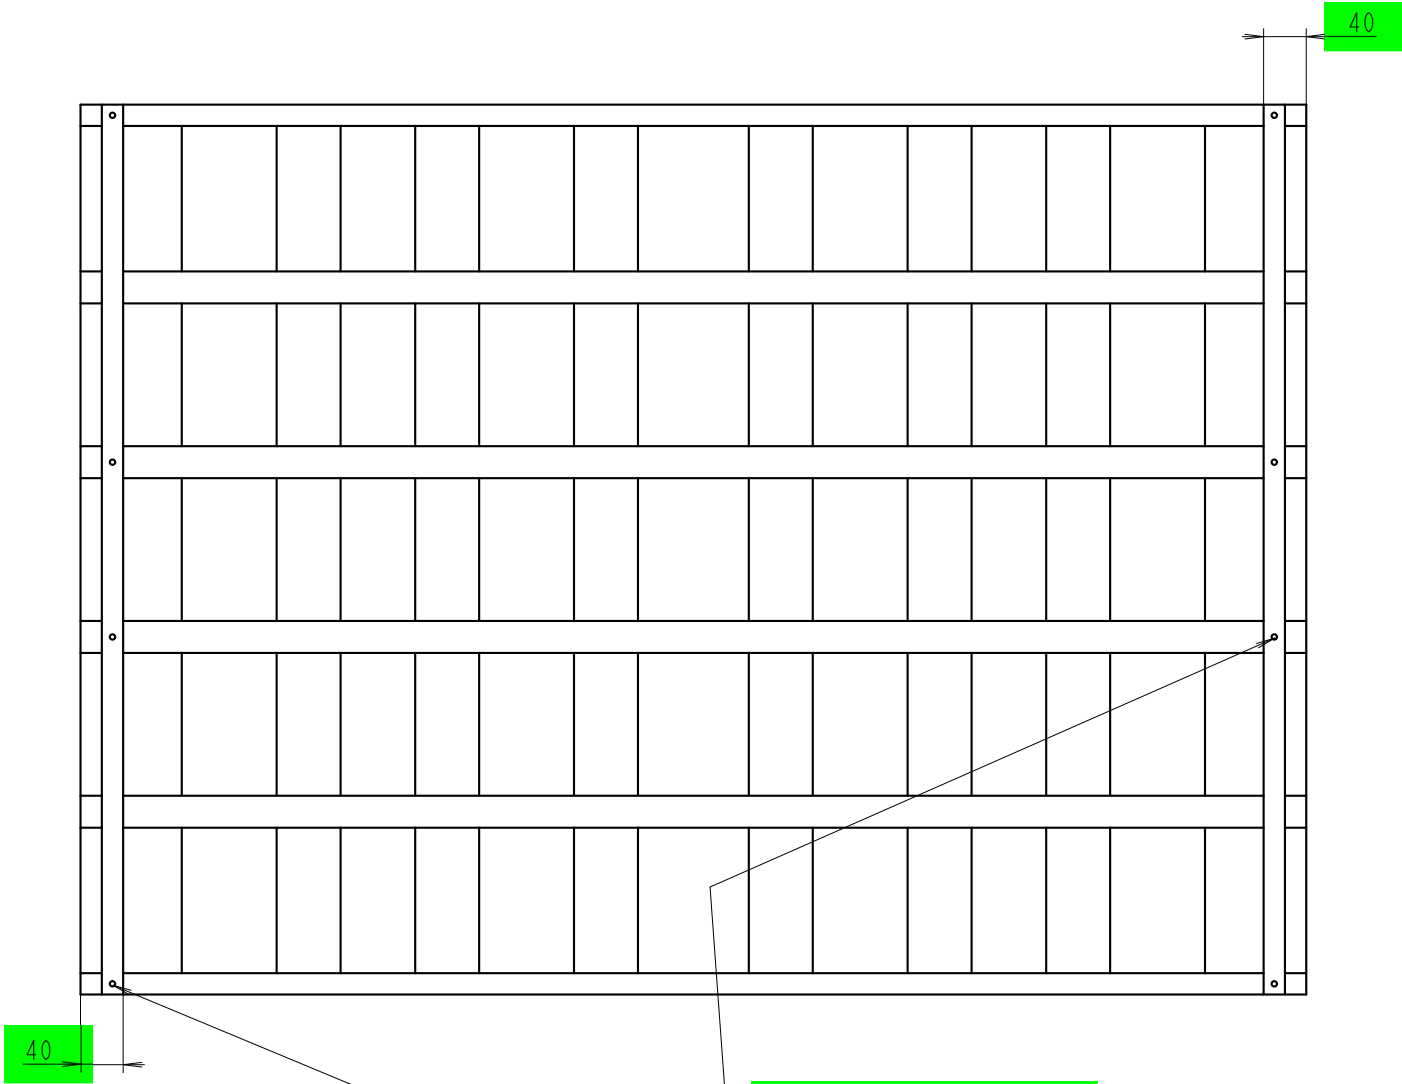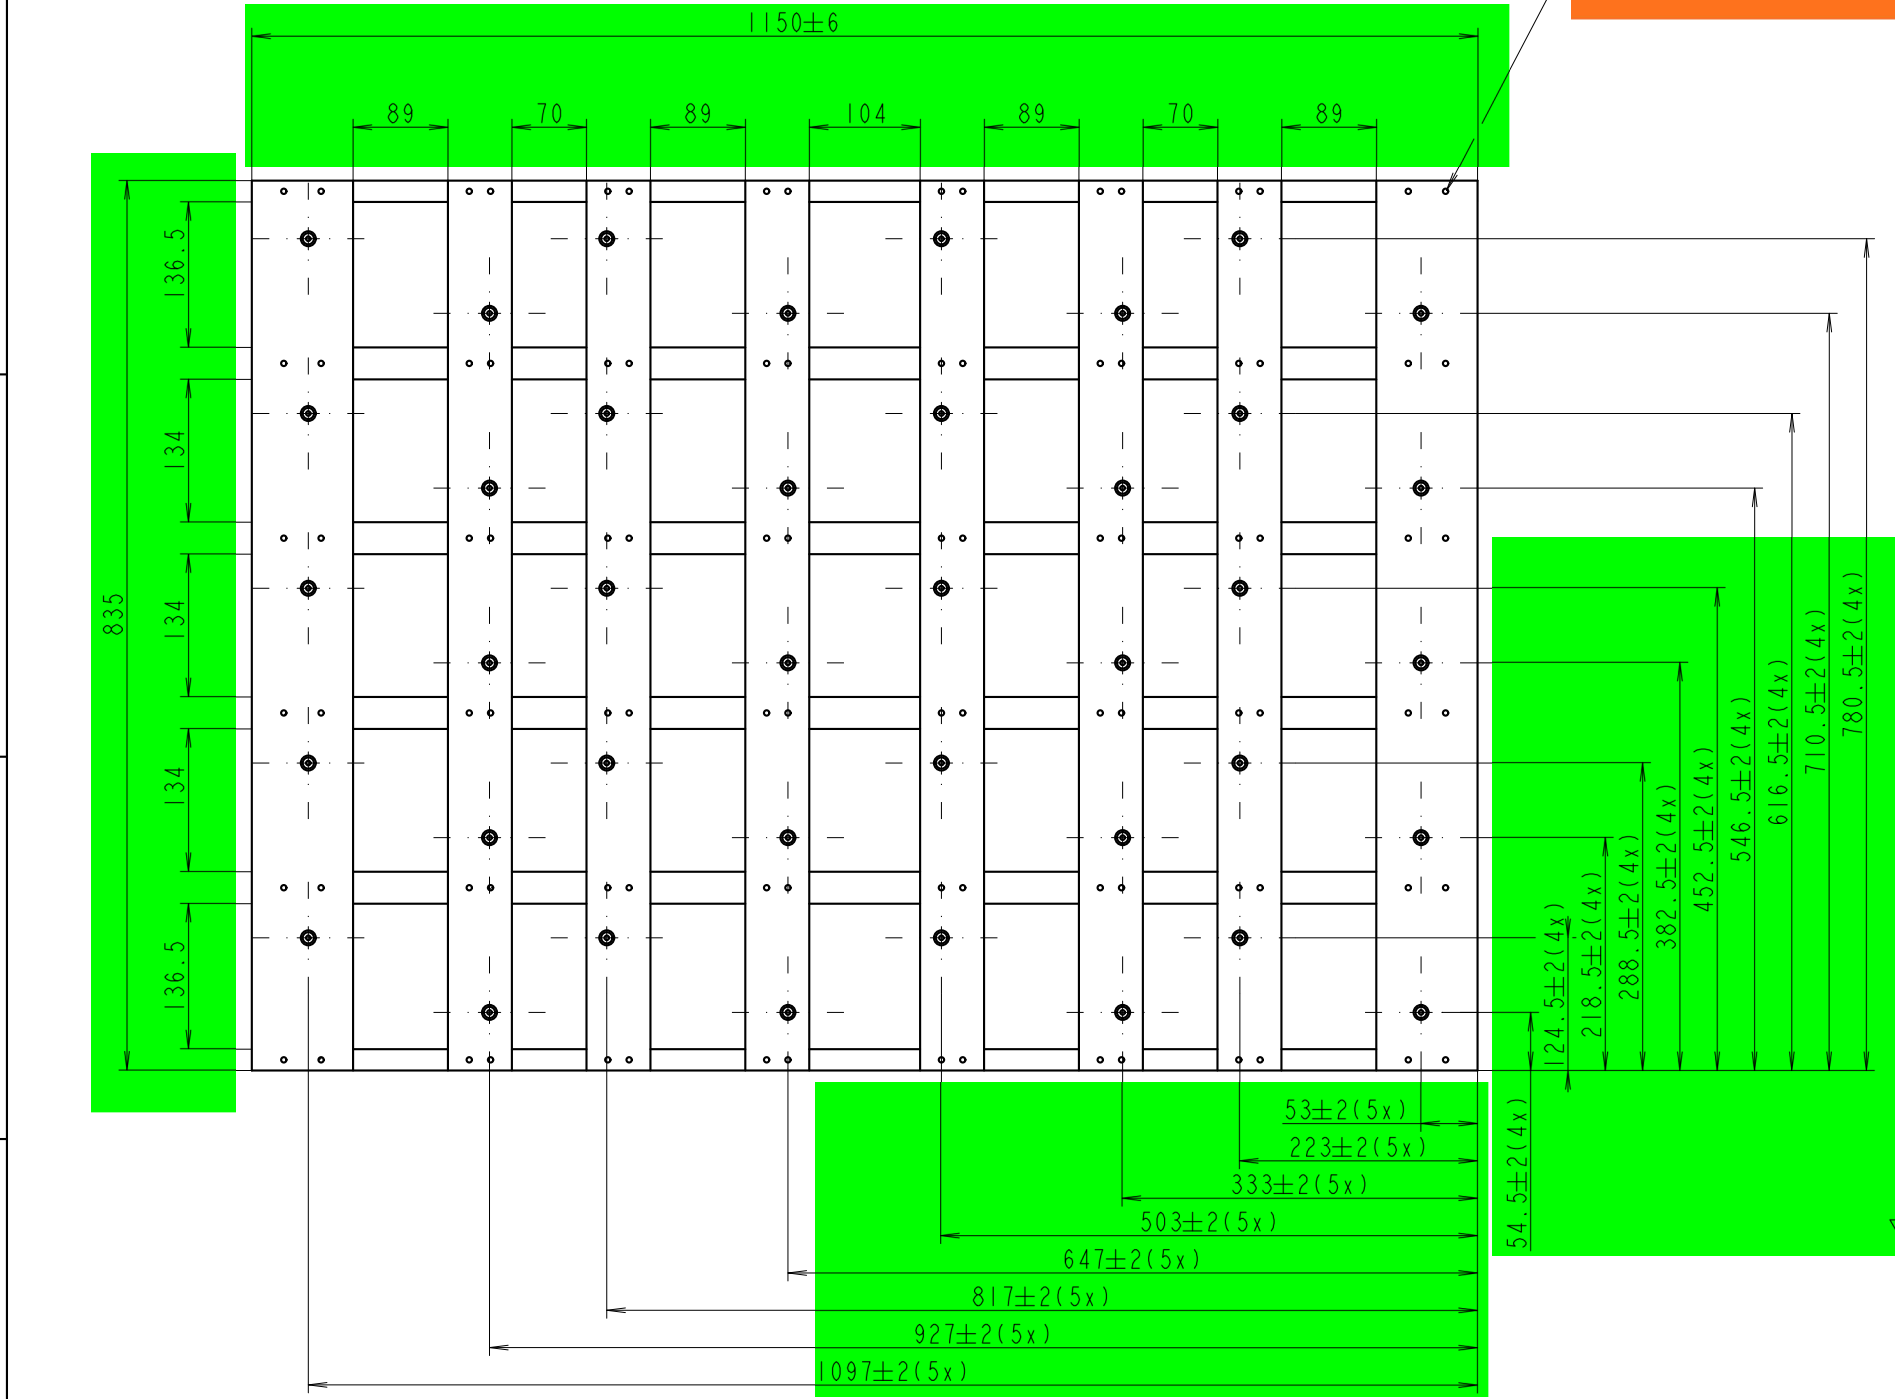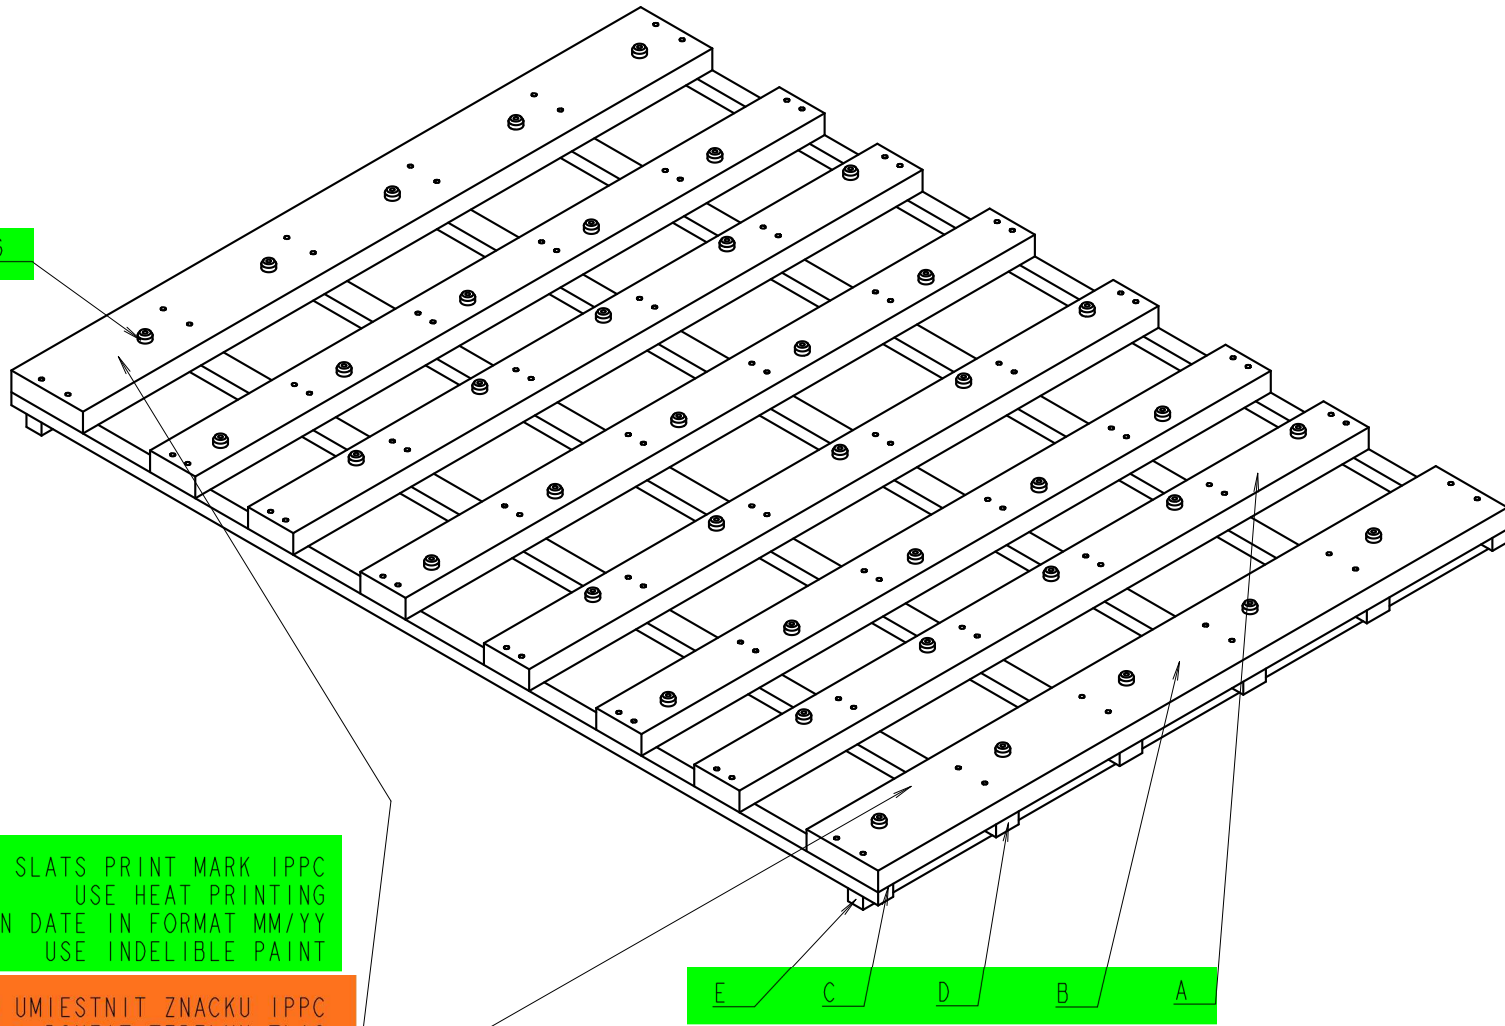

G-8 PCS OF NAILS
POSITION AS SPECIFIED

G-8 KUSOV KLINCOV
AKO JE OZNACENE NA VYKRESE

REV	REVISION	LOG	BY	DATE
01	INITIAL DESIGN	1	MB	01.01.2010
02	DESIGN CHANGES	2	MB	01.01.2010
03	DESIGN CHANGES	3	MB	01.01.2010
04	DESIGN CHANGES	4	MB	01.01.2010
05	DESIGN CHANGES	5	MB	01.01.2010
06	DESIGN CHANGES	6	MB	01.01.2010
07	DESIGN CHANGES	7	MB	01.01.2010
08	DESIGN CHANGES	8	MB	01.01.2010
09	DESIGN CHANGES	9	MB	01.01.2010
10	DESIGN CHANGES	10	MB	01.01.2010
11	DESIGN CHANGES	11	MB	01.01.2010
12	DESIGN CHANGES	12	MB	01.01.2010

Ok
New
Updated
Removed


NOTES:
1- PALLET MUST BE DRY (MAX. ALLOWED INTERNAL MOISTURE 23%), WITHOUT ALTERATIONS
DANGEROUS FOR THE RESISTANCE/STRENGTH
2- THE LARGE USE OF STRIPES NOT ACCORDING TO THE DRAWING OR BARK AND CRACKS ATTENDANCE
WILL ALLOW THE REJECTION OF THE ENTIRE BATCH SUPPLIED
3- FIXATION OF TRAVERSE ONLY WITH NAILS APPROVED BY EMBRACO TECHNICAL DEPARTMENT
4- SEE TSS 00PS06, TSS 002100 FOR FURTHER REQUIREMENTS
5- FOR MARK IPPC LOOK AT THE INTERNATIONAL STANDARD ISPM 15
6- REQUIREMENTS ABOUT HAZARDOUS SUBSTANCES MUST BE IN ACCORDANCE WITH THE TSS 002420
7- DIMENSIONS AND SPECIFICATIONS SIGNED WITH $\nabla\oplus$, SEE TSS 002470
8- ASSEMBLY JIG FOR PLASTIC PINS FIXATION MUST BE IN TOLERANCE ± 1 mm
9- DIMENSIONS TOLERANCE OF COMPONENTS A-E: ± 2 mm

POZNAMKY:
1- PALETA MUSI BYT SUCHA (MAX. POVOLENA VNUTORNA VLNKOST 23%), BEZ ODCHYLOK, KTORE
SU NEBEZPECNE PRE JEJ ODOLNOST ALEBO PEVNOST
2- VACSI VYSKYT DOSIEK NEZODPOVEDAJUCICH VYKRESU, ALEBO DOSKY S KOROU,
PRASKLINAMI SPOSOBIA VYRADENIE CELEJ DODAVKY
3- UPEVNVENIE TRAVERZ LEN POMOCOU KLINCOV SCHVALENYCH TECHNICKYM ODDELENIM EMBRACO
4- PRE DALSIE POZIADAVKY POZRI NORMY TSS 00PS06, TSS 002100
5- PRE ZNACUKU IPPC POZRI MEDZINARODNY STANDARD ISPM 15
6- MUSI ZODPOVEDAT POZIADAVKAM O NEBEZPECNYCH LAKACH PODLA NORMY TSS 002420
7- KOTY A SPECIFIKACIE OZNACENE TAKTO $\nabla\oplus$, POZRI TSS 002470
8- MONTAZNY PRIPRAVOK PRE FIXACIU PLASTOVYCH KOLIKOV MUSI BYT V TOLERANCII ± 1 mm
9- TOLERANCIA ROZMEROV KOMPONENTOV A-E: ± 2 mm


MATERIAL : ABETE SPRUCE SMREK	embraco	GEN. TOL. : ± 4 ANG. TOL. : -- SCALE : 1:5 REPLACE
CODE : DRAWN : Pavel BEZILA APP. : Della VECCHIA ECN : 508946	NAME INTERMEDIATE SEPARATOR FOR NEW WOODEN PACKAGING MIDI MEDZIVRSTVA PRE NOVE DREVENE BALENIE MIDI	No. 1.754.063 --

COMPONENTS	DIMENSIONS	QTY
A	835x60x25	6
B	835x95x25	2
C	1150x20x15	2
D	1150x30x15	4
E	835x20x15	2
G	ANNULAR RING NAIL Ø2,1-30	104
2998269 ALTER. 2206030	ANNULAR RING NAIL Ø3-28 SCREW FOR WOOD Ø4x25	40
2037146	PIN FOR WOODEN PACKING	40
GLUE	APPLY EVENLY	

FOR ALL PLASTIC PIN 2037146 USE
2998269 ANNULAR RING FLATHEAD NAILS Ø3-28,
IN ALTERNATIVE SCREWS 2206030




6-96 PCS OF NAILS
POSITION AS SPECIFIED

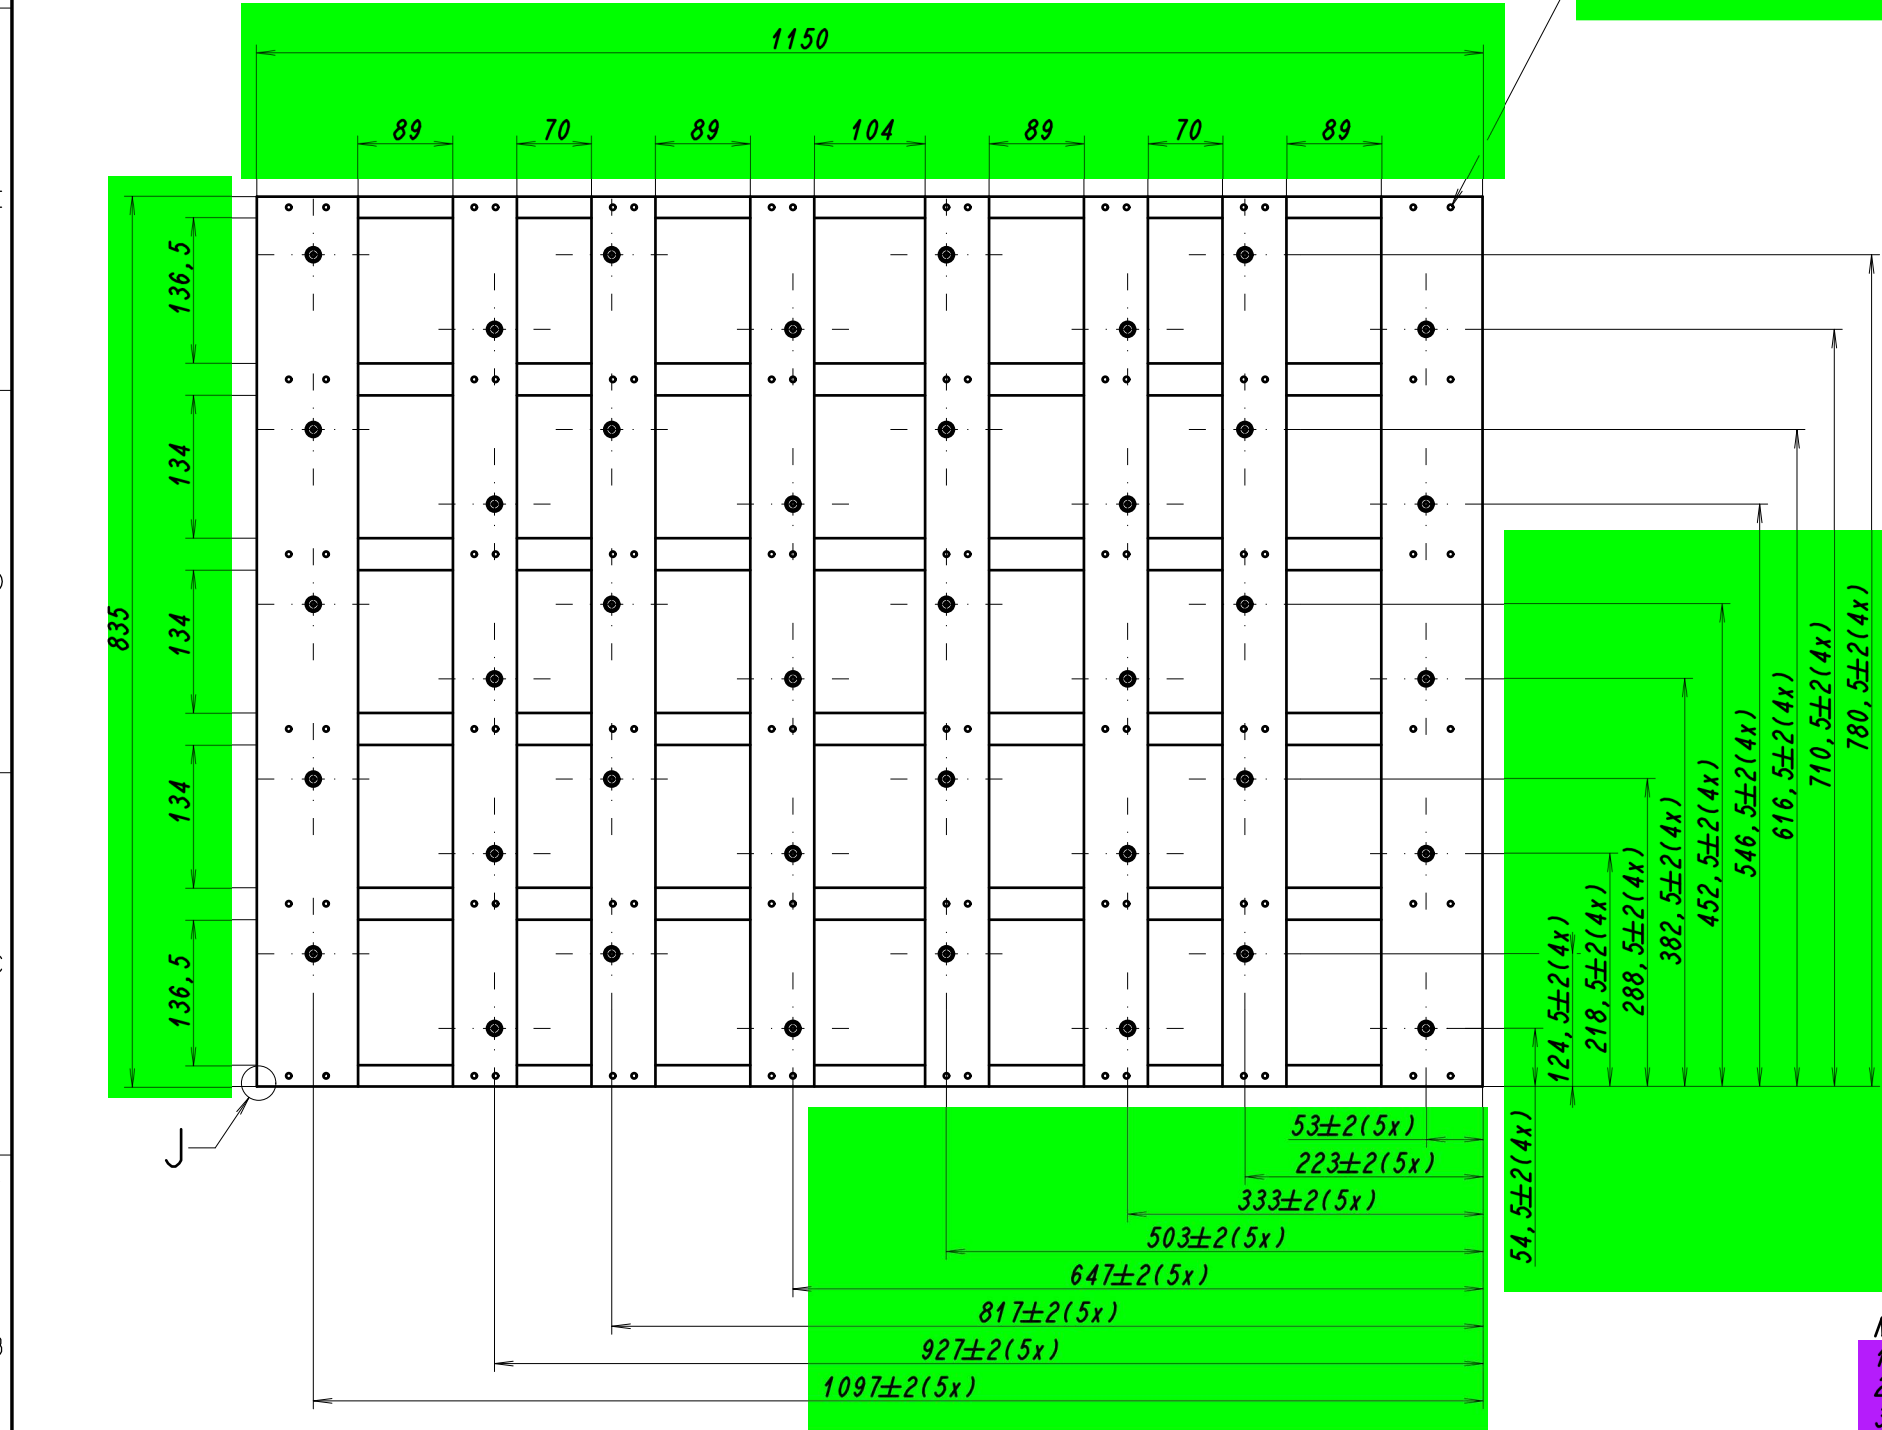

REV	DESCRIPTION	LO	BY	DATE
01	INITIAL DESIGN	1	BEZILA	15.01.2017
02	DESIGN CHANGES	2	BEZILA	04.01.2017
03	DESIGN CHANGES	3	BEZILA	04.01.2017
04	DESIGN CHANGES	4	BEZILA	04.01.2017
05	DESIGN CHANGES	5	BEZILA	04.01.2017
06	DESIGN CHANGES	6	BEZILA	04.01.2017
07	DESIGN CHANGES	7	BEZILA	04.01.2017
08	DESIGN CHANGES	8	BEZILA	04.01.2017
09	DESIGN CHANGES	9	BEZILA	04.01.2017
10	DESIGN CHANGES	10	BEZILA	04.01.2017
11	DESIGN CHANGES	11	BEZILA	04.01.2017
12	DESIGN CHANGES	12	BEZILA	04.01.2017


- Ok
- New
- Updated
- Removed

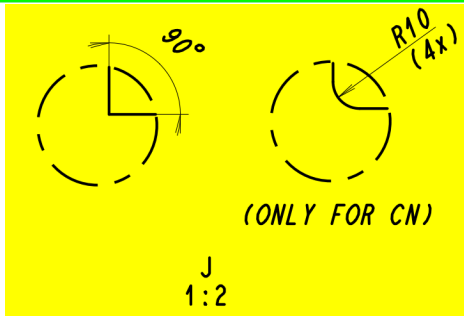

PART NO.	PROCESS
1754063	NORMAL
14051283	FUMIGATION


NOTES:
1-DRAWING ACCORDING TO ISO STANDARDS, SEE TSS 002513.
2-DIMENSIONS AND SPECIFICATIONS SIGNED WITH SEE TSS 002470.
3-REQUIREMENTS ABOUT HAZARDOUS SUBSTANCES ACCORDING TO TSS 02420.
4-PALLET MUST BE DRY (MAX. ALLOWED INTERNAL MOISTURE 23%), WITHOUT ALTERATIONS DANGEROUS FOR THE RESISTANCE/STRENGTH
5-THE LARGE USE OF STRIPES NOT ACCORDING TO THE DRAWING OR BARK AND CRACKS ATTENDANCE WILL ALLOW THE REJECTION OF THE ENTIRE BATCH SUPPLIED
6-FIXATION OF TRAVERSE ONLY WITH NAILS APPROVED BY EMBRACO TECHNICAL DEPARTMENT
7-SEE TSS 00PS06, TSS 002100 FOR FURTHER REQUIREMENTS
8-FOR MARK IPPC LOOK AT THE INTERNATIONAL STANDARD ISPM 15
9-ASSEMBLY JIG FOR PLASTIC PINS FIXATION MUST BE IN TOLERANCE ±1 mm
10-DIMENSIONS TOLERANCE OF COMPONENTS A-E: ±2 mm
11-GLUE REQUIREMENT ONLY USED IN CN PLANT.

2037146

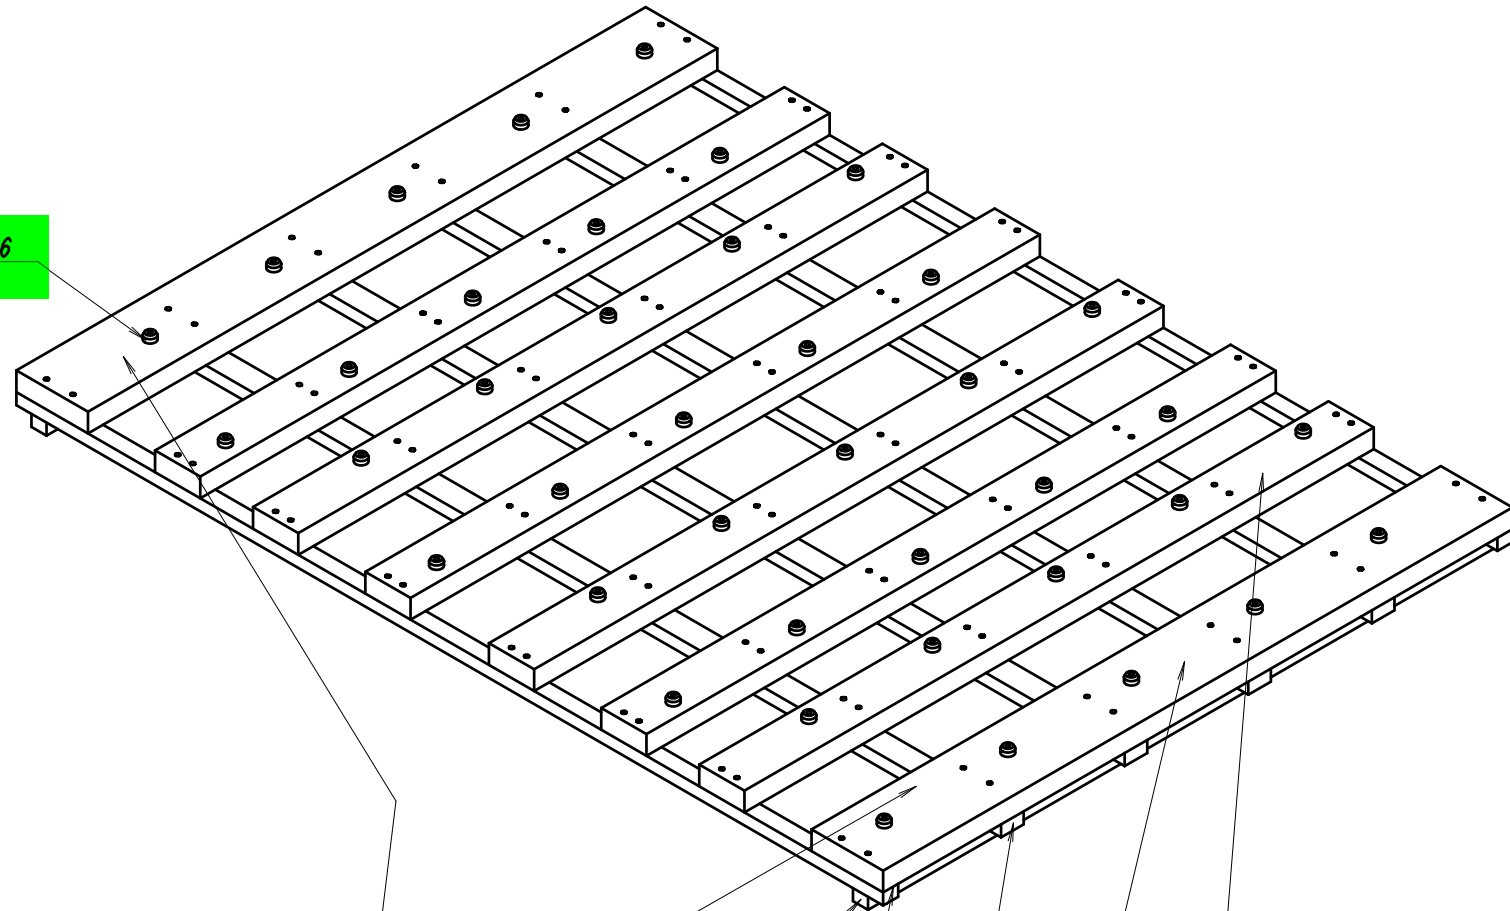

ON TOP SIDE OF ONE OF THIS SLATS PRINT MARK IPPC
USE HEAT PRINTING
AND PRINT PRODUCTION DATE IN FORMAT MM/YY
USE INDELIBLE PAINT

GLUE AERA, PAINT EVERY LAYER

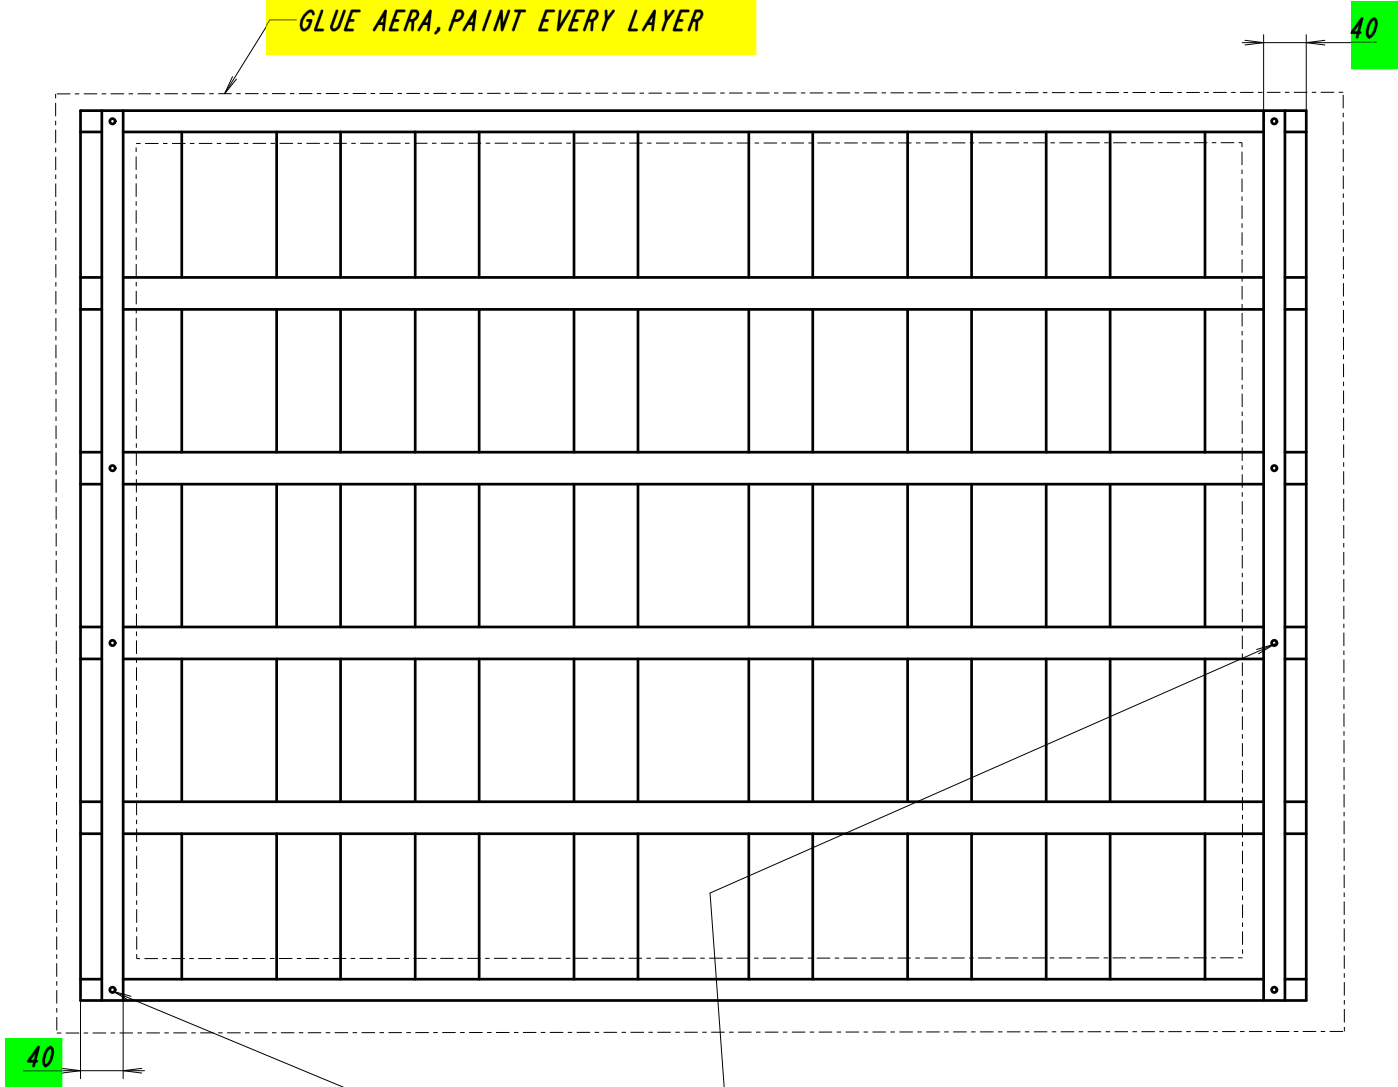

6-8 PCS OF NAILS
POSITION AS SPECIFIED

MATERIAL : SPRUCE	embraco Nidec	GEN. TOL. : ±4
CODE : DRAWN : APP. : ECM : 508946	TITLE, DOCUMENT TYPE INTERMEDIATE SEPARATOR FOR NEW WOODEN PACKAGING MIDI	ANG. TOL. : -- SCALE : 1:5 UNIT : mm REPLACE : No. 1754063 SHEET NUMBER : 1 OF 1