


COMPONENTS	DIMENSIONS	QTY
A	835x60x25	6
B	835x95x25	2
C	1150x20x15	2
D	1150x30x15	4
E	835x20x15	2
G	ANNULAR RING NAIL Ø2,1-30	104
2.998.269 ALTER. 2.206.030	ANNULAR RING NAIL Ø3-28 SCREW FOR WOOD Ø4x25	40
2.037.146	PIN FOR WOODEN PACKING	40

FOR ALL PLASTIC PIN 2.037.146 USE
2.998.269 ANNULAR RING FLATHEAD NAILS Ø3-28,
IN ALTERNATIVE SCREWS 2.206.030




PRE VSETKY PLASTOVE KOLIKY 2.037.146 POUZIT
2.998.269 KONVEXNE PRSTENCOVE KLINCE Ø3-28
S PLOCHOU HLAVOU, ALTERNATIVA SKRUTKY 2.206.030

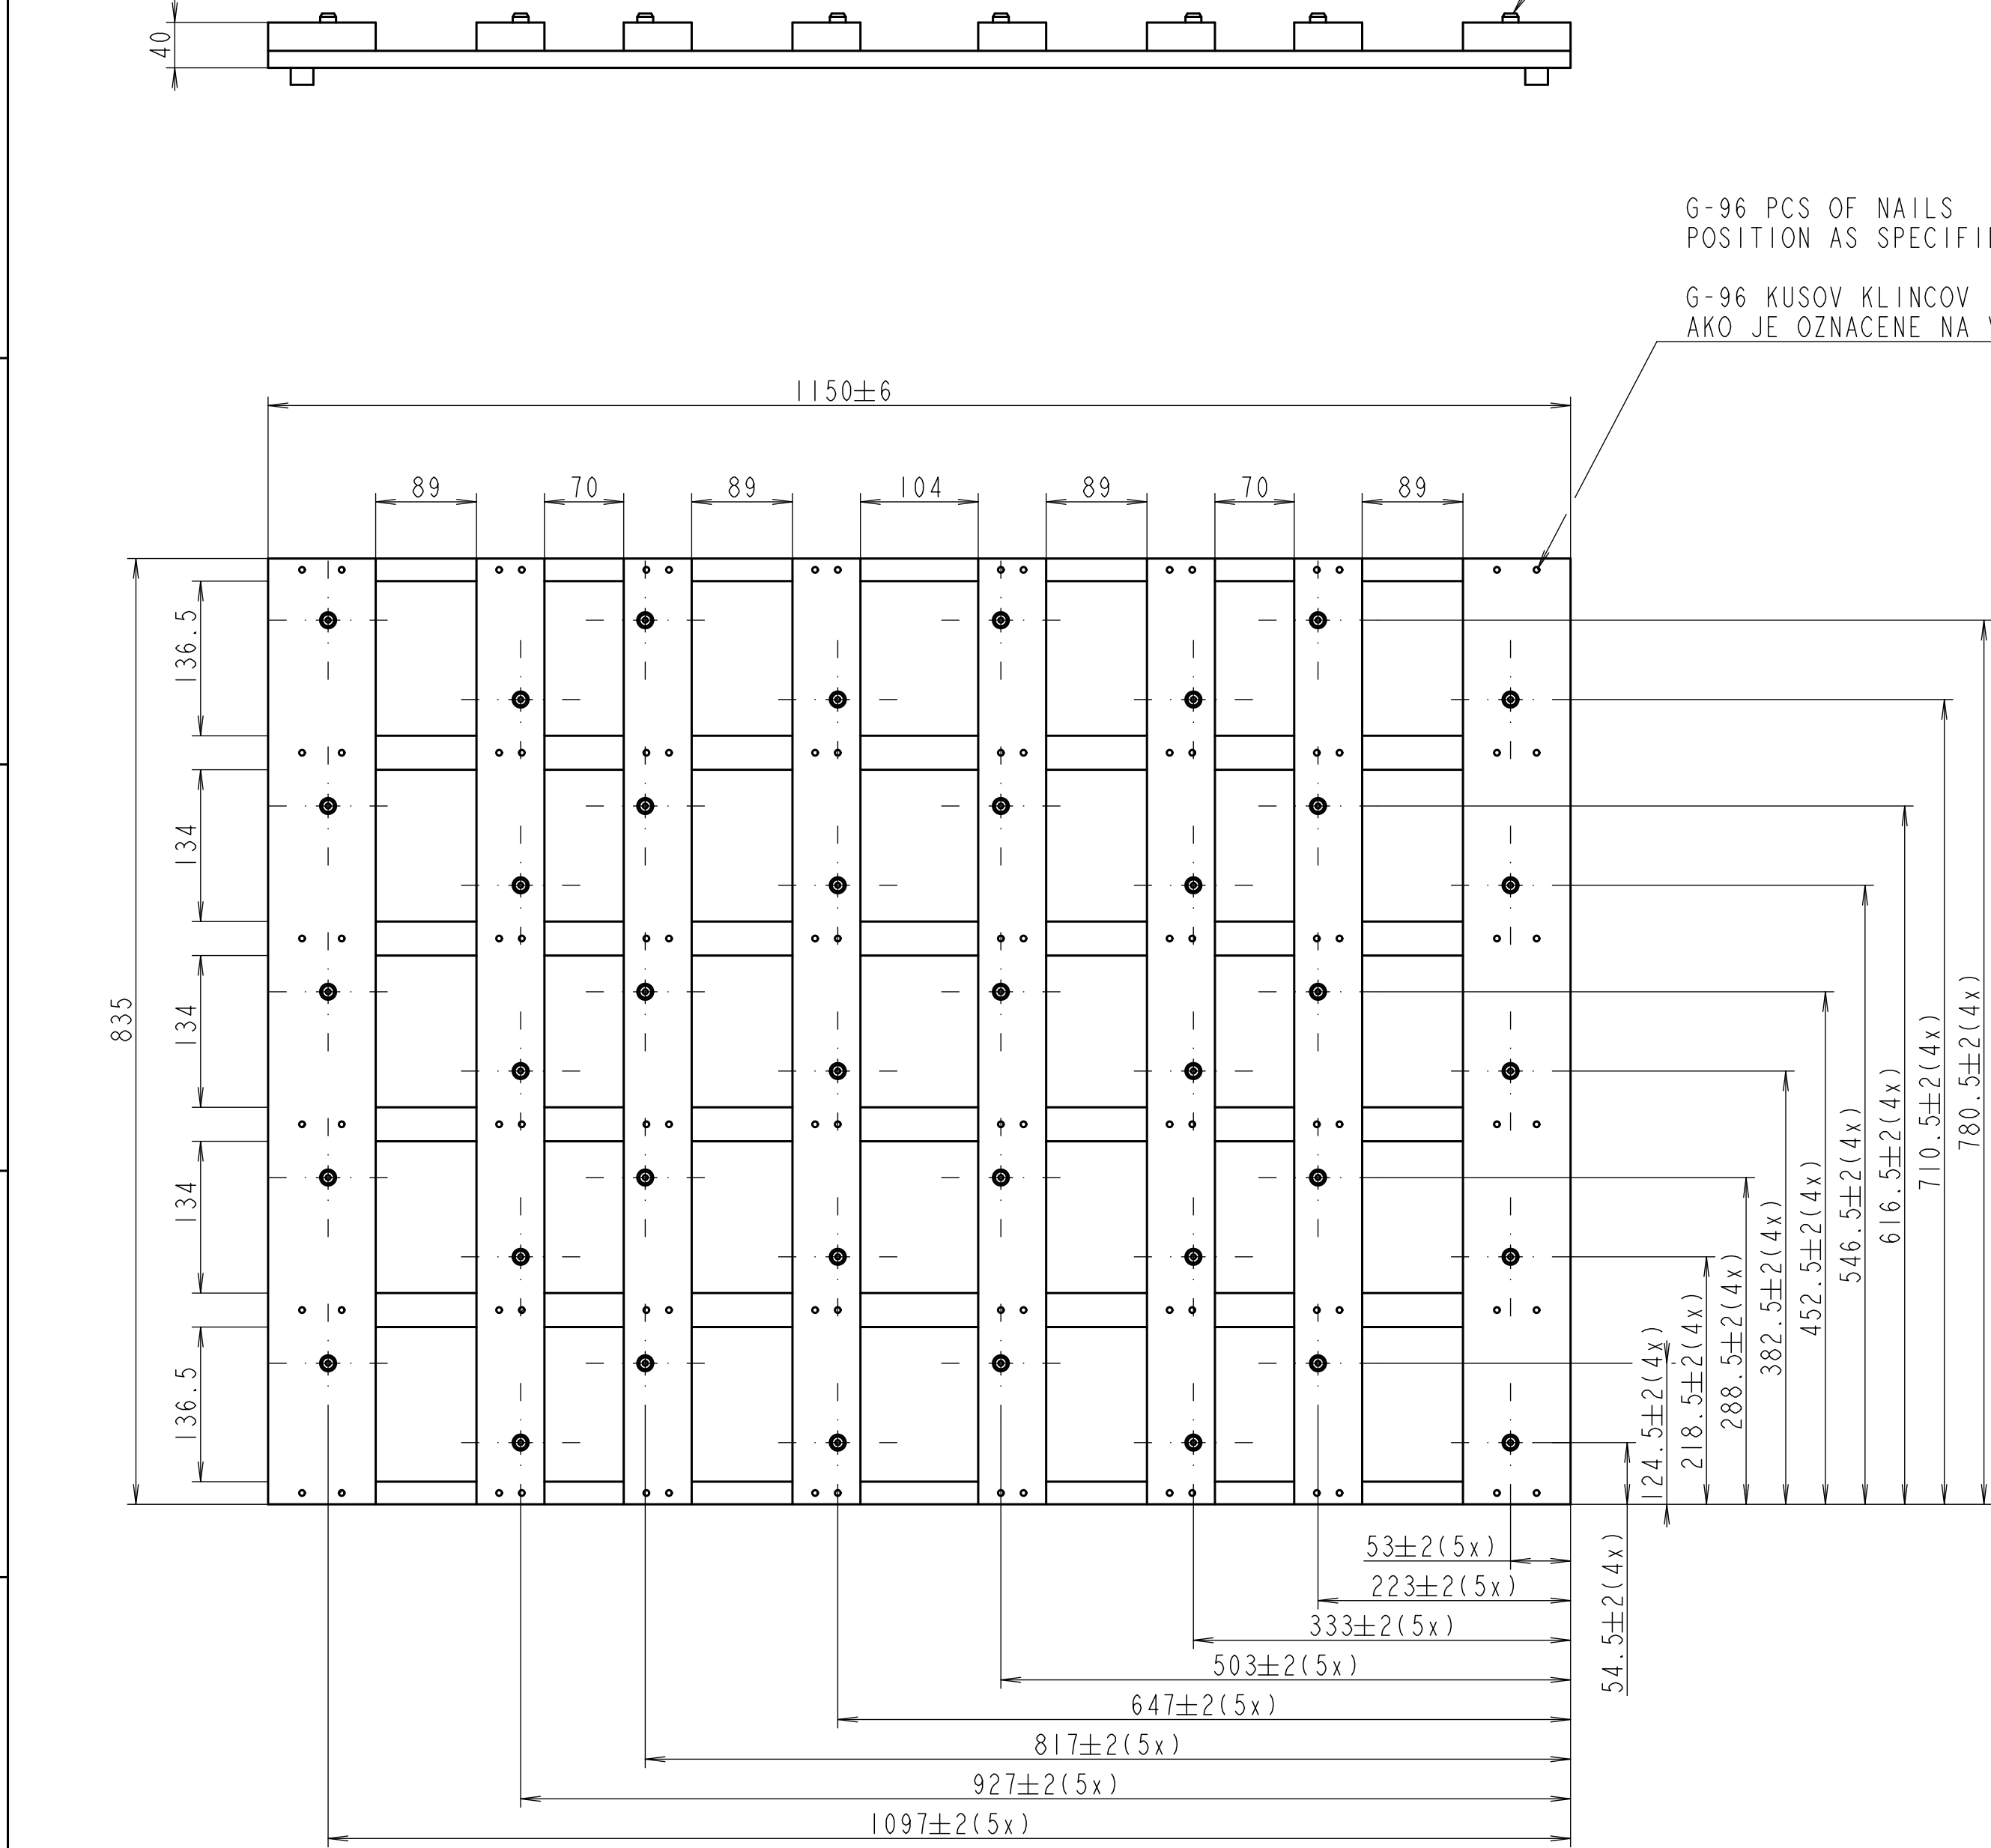

REV	DESCRIPTION	LO	BY	APP	DATE
1	DESIGN	FR	ME	FR	11.03.2001
2	CHANGE TO NEW 1150x835	FR	ME	FR	08.08.2001
3	CHANGE TO NEW 1150x835	FR	ME	FR	25.02.2004
4	CHANGE TO NEW 1150x835	FR	ME	FR	02.10.2006
5	CHANGE TO NEW 1150x835	FR	ME	FR	06.04.2011
6	CHANGE TO NEW 1150x835	FR	ME	FR	06.04.2014
7	CHANGE TO NEW 1150x835	FR	ME	FR	21.01.2018

ON TOP SIDE OF ONE OF THIS SLATS PRINT MARK IPPC
USE HEAT MARK PRINTING
AND PRINT PRODUCTION DATE IN FORMAT MM/YY
USE INDELIBLE PAINT

NA HORNU STRANU JEDNEJ Z TYCHTO DOSAK UMIESTNIT ZNACKU IPPC
POUZIT TEPELNU TLAC
A POZNACIT DATUM VYROBY VO FORMATE MM/RR
POUZIT NEZMAZATELNU FARBU

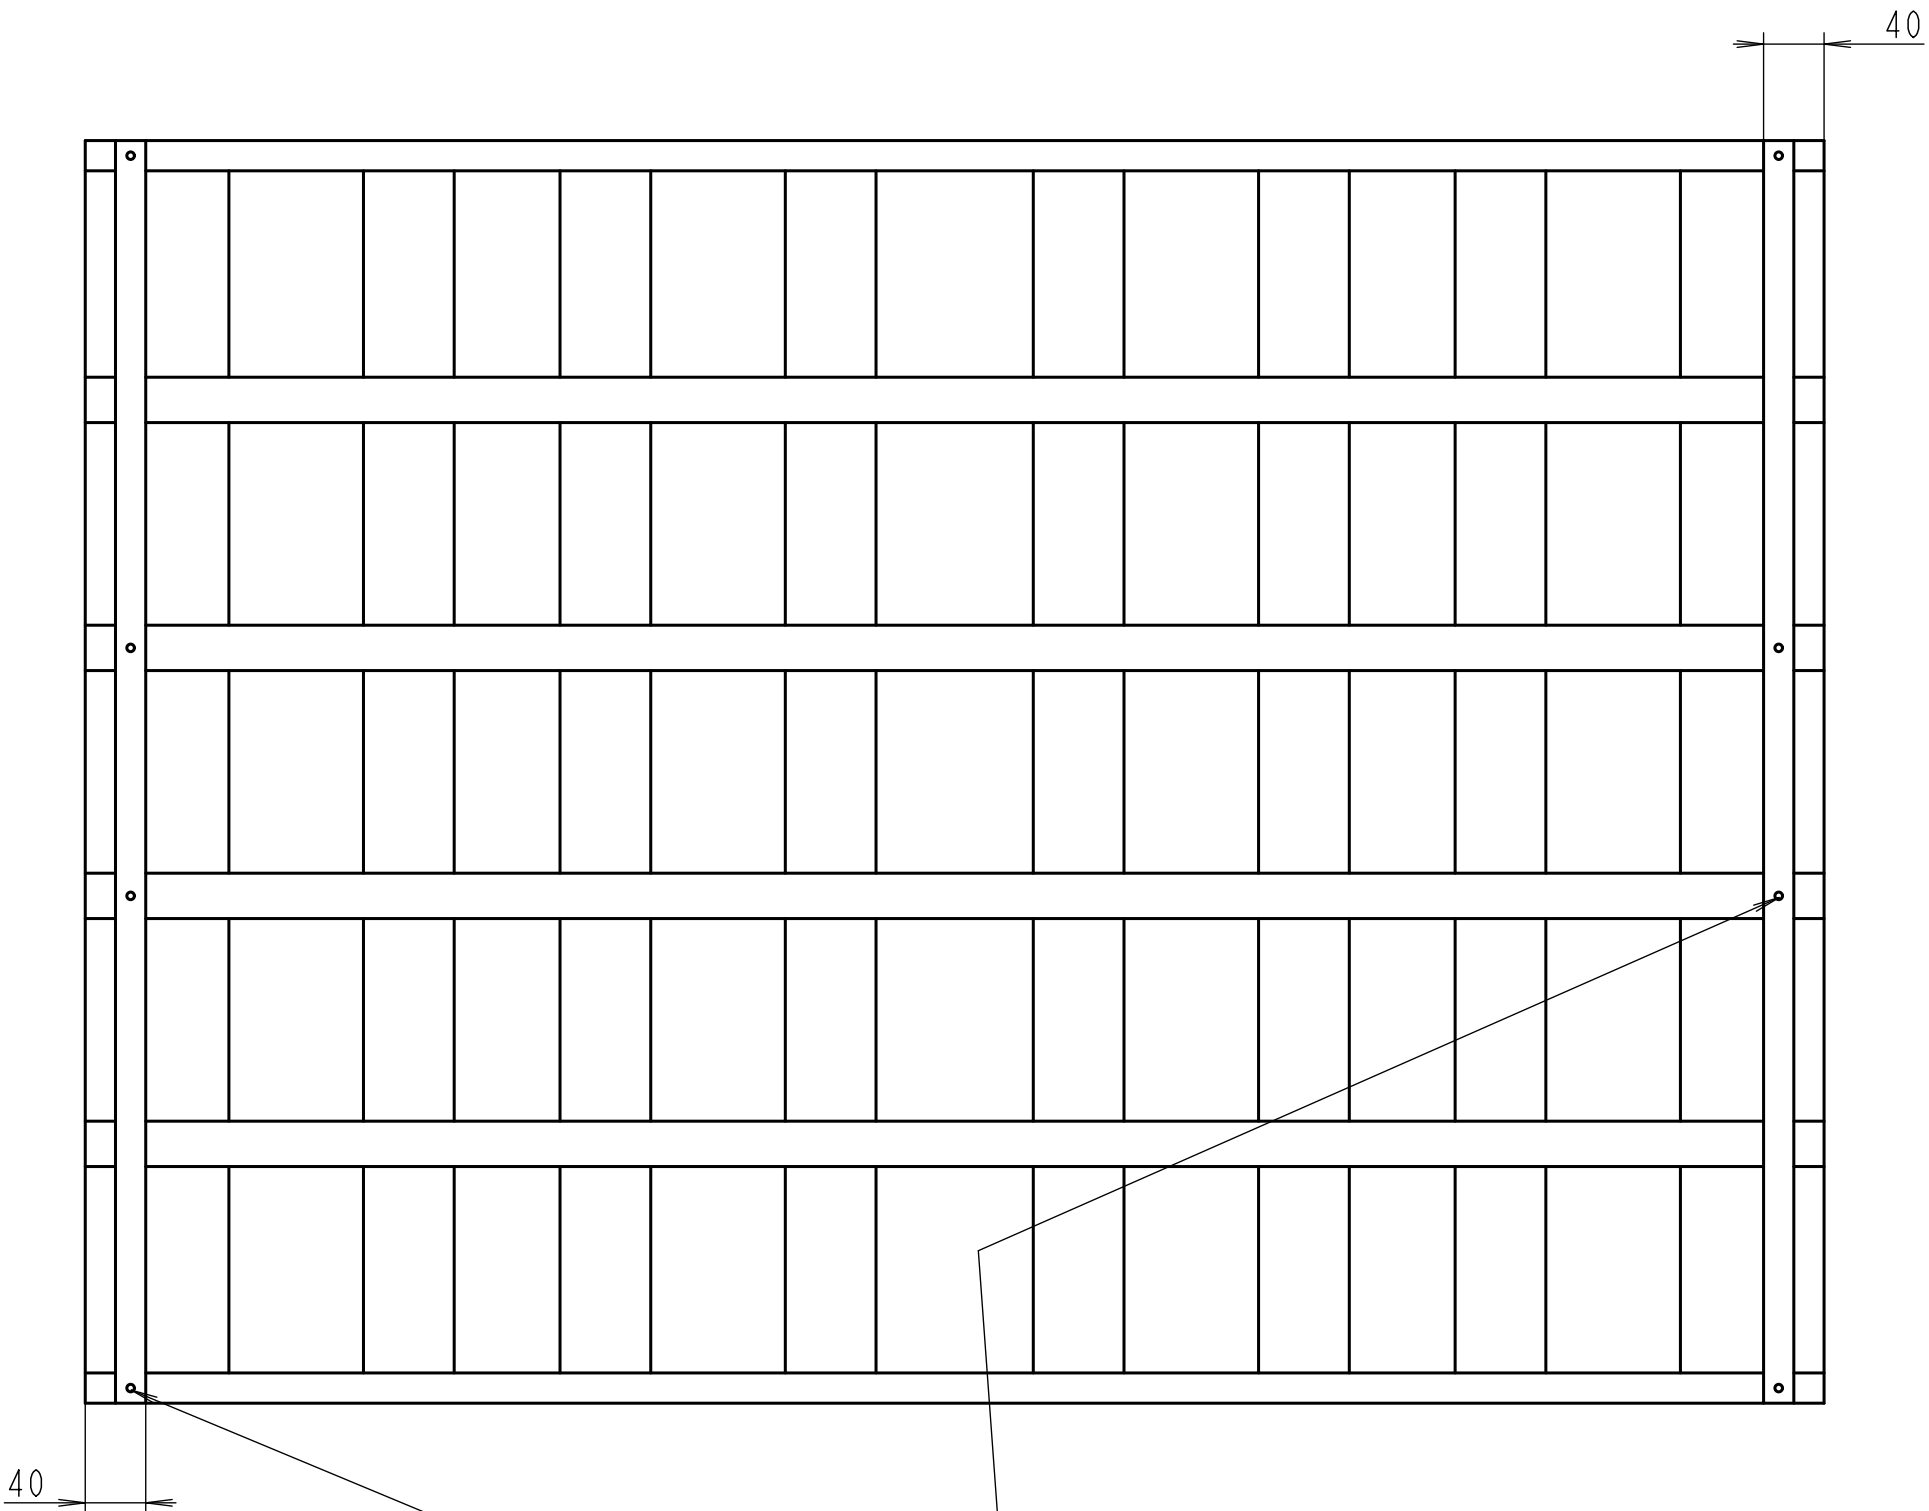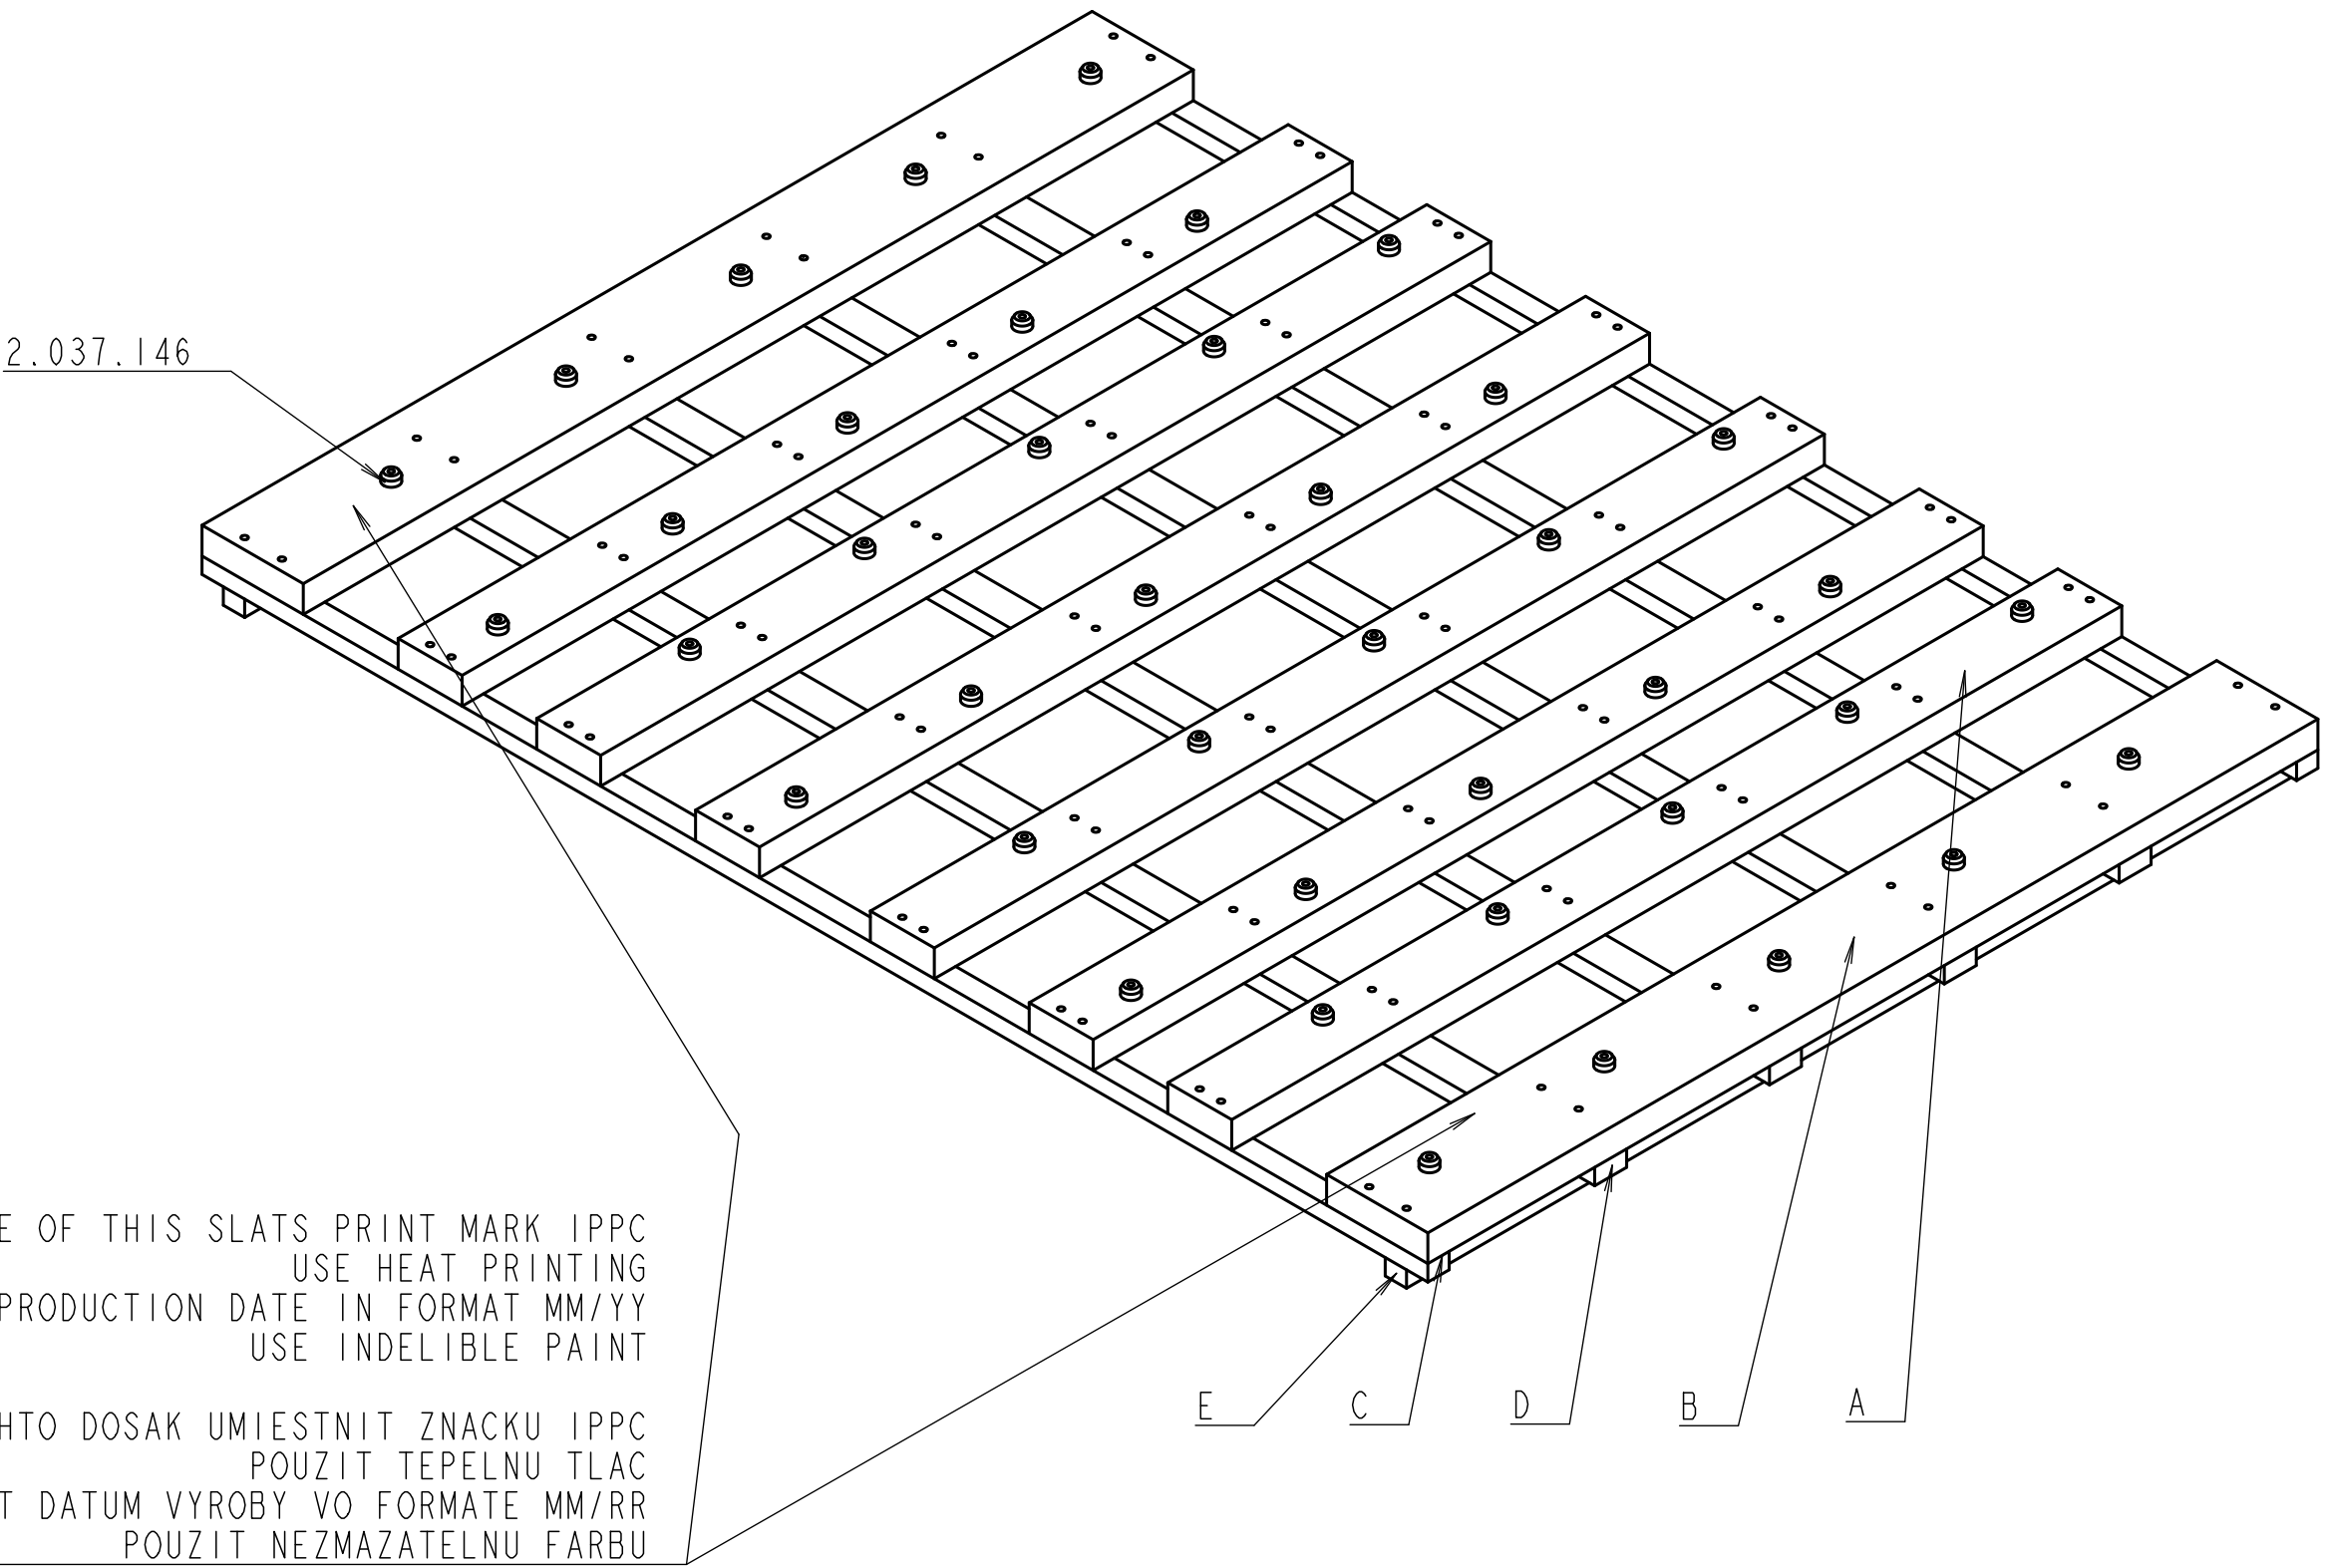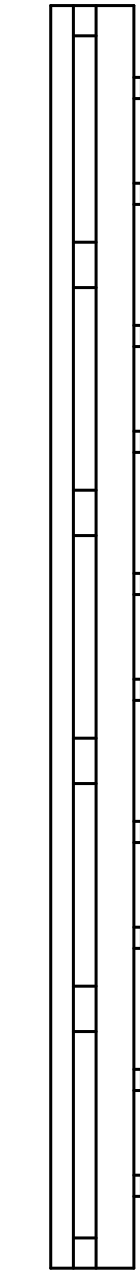

NOTES:

▽1-PALLET MUST BE DRY (MAX. ALLOWED INTERNAL MOISTURE 23%), WITHOUT ALTERATIONS
DANGEROUS FOR THE RESISTANCE/STRENGHT
2-THE LARGE USE OF STRIPES NOT ACCORDING TO THE DRAWING OR BARK AND CRACKS ATTENDENCE
WILL ALLOW THE REJECTION OF THE ENTIRE BATCH SUPPLIED
3-FIXATION OF TRAVERSE ONLY WITH NAILS APPROVED BY EMBRACO TECHNICAL DEPARTMENT
4-SEE TSS 00PS06, TSS 002100 FOR FURTHER REQUIREMENTS
5-FOR MARK IPPC LOOK AT THE INTERNATIONAL STANDARD ISPM 15
▽6-REQUIREMENTS ABOUT HAZARDOUS SUBSTANCES MUST BE IN ACCORDANCE WITH THE TSS 002420
7-DIMENSIONS AND SPECIFICATIONS SIGNED WITH ▼▼◆, SEE TSS 002470
8-ASSEMBLY JIG FOR PLASTIC PINS FIXATION MUST BE IN TOLERANCE ±1 mm
9-DIMENSIONS TOLERANCE OF COMPONENTS A-E: ±2 mm

POZNAMKY:

▽1-PALETA MUSI BYT SUCHA (MAX. POVOLENA VNUTORNA VLNKOST 23%), BEZ ODCHYLOK,KTORE
SU NEBEZPECNE PRE JEJ ODOLNOST ALEBO PEVNOST
2-VACSI VYSKYT DOSIEK NEZODPOVEDAJUCICH VYKRESU,ALEBO DOSKY S KOROU,
PRASKLINAMI SPOSOBIA VYRADENIE CELEJ DODAVKY
3-UPEVNIENIE TRAVERZ LEN POMOCOU KLINCOV SCHVALENYCH TECHNICKYM ODDELENIM EMBRACO
4-PRE DALSIE POZIADAVKY POZRI NORMY TSS 00PS06, TSS 002100
5-PRE ZNACKU IPPC POZRI MEDZINARODNY STANDARD ISPM 15
▽6-MUSI ZODPOVEDAT POZIADAVKAM O NEBEZPECNYCH LATKACH PODLA NORMY TSS 002420
7-KOTY A SPECIFIKACIE OZNACENE TAKTO ▼▼◆, POZRI TSS 002470
8-MONTAZNY PRIPRAVOK PRE FIXACIU PLASTOVYCH KOLIKOV MUSI BYT V TOLERANCII ±1 mm
9-TOLERANCIA ROZMEROV KOMPONENTOV A-E: ±2 mm

MATERIAL : ABETE SPRUCE SMREK	embraco	GEN. TOL. : ±4
CODE :	NAME INTERMEDIATE SEPARATOR FOR NEW WOODEN PACKAGING MIDI	ANG. TOL. : --
DRAWN : Pavol BEZILA	APP.: Dalla VECCHIA	SCALE : 1:5
ECN : 500946	THIS MATERIAL IS CONFIDENTIAL AND PROPRIETARY TO EMBRACO EUROPE AND MAY NOT BE REPRODUCED, DISCLOSED, DISTRIBUTED OR USED WITHOUT WRITTEN PERMISSION.	REPLACE 1.754.063