

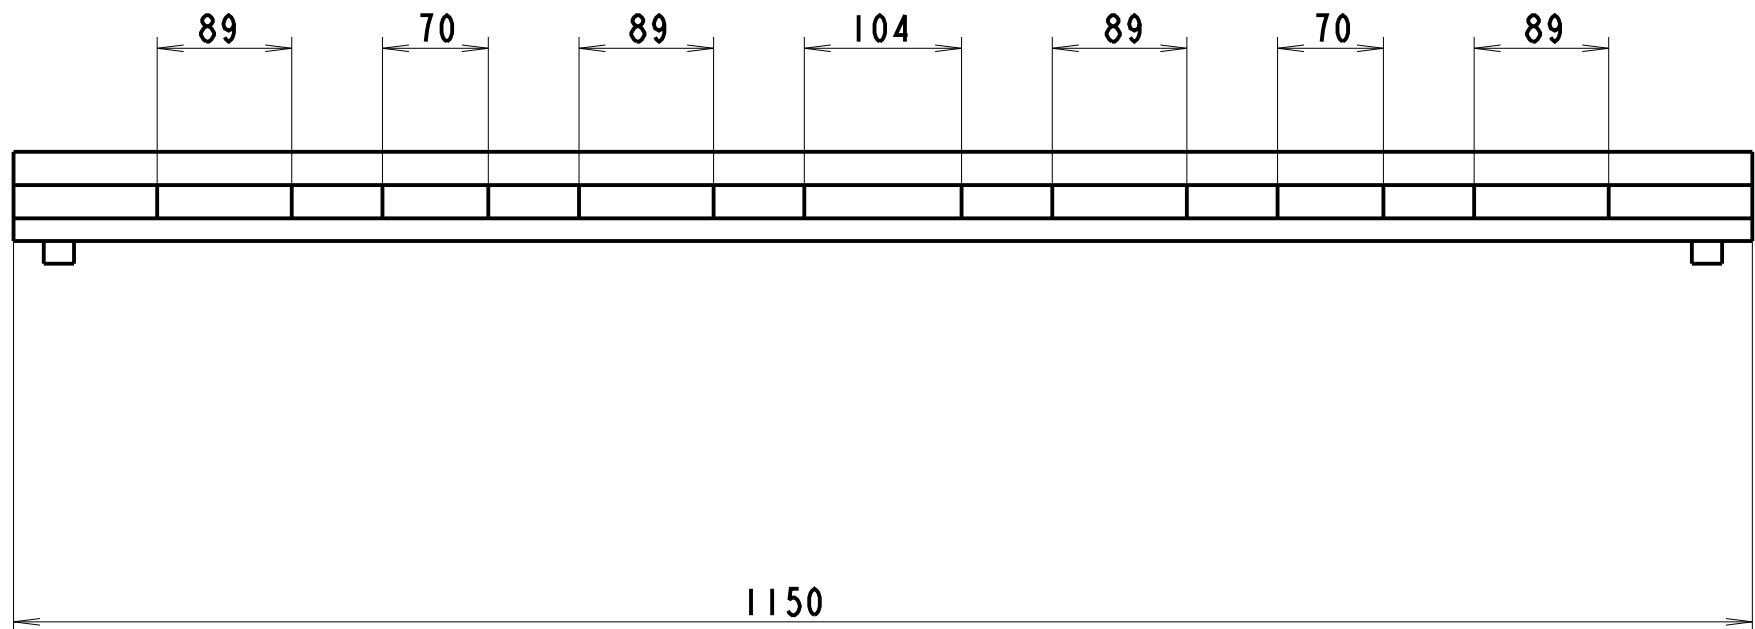


CODE	DIMENSIONS	QTY
A	1150x95x22	3
B	835x60x22	6
ALTER.	835x30x22	12
C	835x95x22	2
D	1150x20x15	2
E	1150x30x15	4
F	ANNULAR RING NAIL Ø2,1-35	56
H	ANNULAR RING NAIL Ø2,1-50	96
I	835x20x15	2




F-48 PCS OF NAILS
POSITION AS SPECIFIED

F-48 KUSOV KLINCOV
AKO JE OZNACENE NA VYKRESE

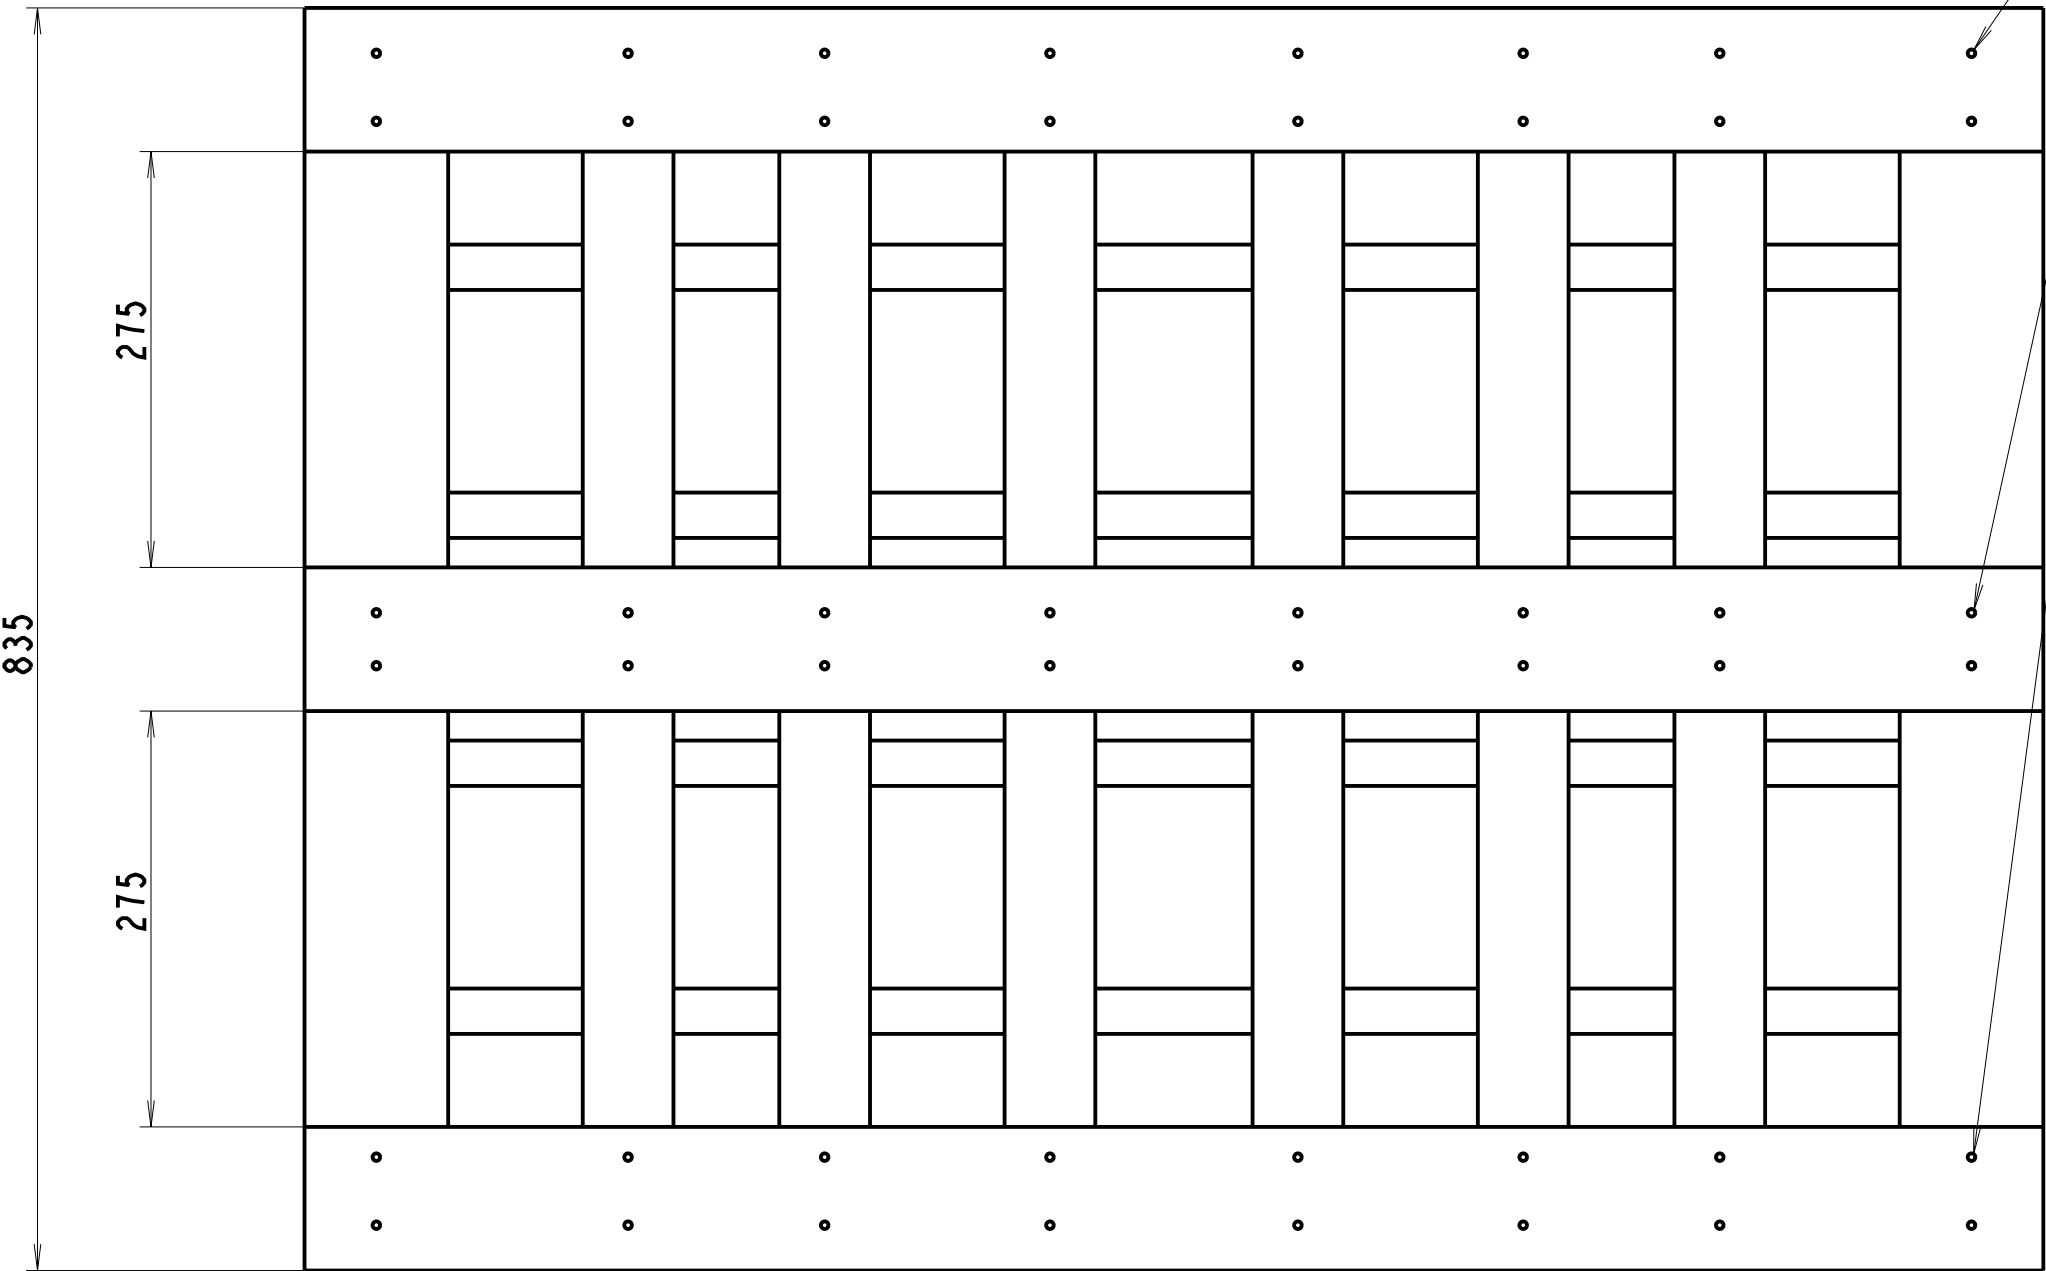


ON TOP SIDE OF ONE OF THIS SLATS
PRINT MARK IPPC AND PRODUCTION
DATE IN FORMAT MM/YY
USE HEAT PRINTING
NA HORNÚ STRANU JEDNEJ Z TYCHTO DOSAK
UMIESTNIŤ ZNAČKU IPPC A DATUM VÝROBY
VO FORMATE MM/RR
POUŽIŤ TEPELNÚ TLAC

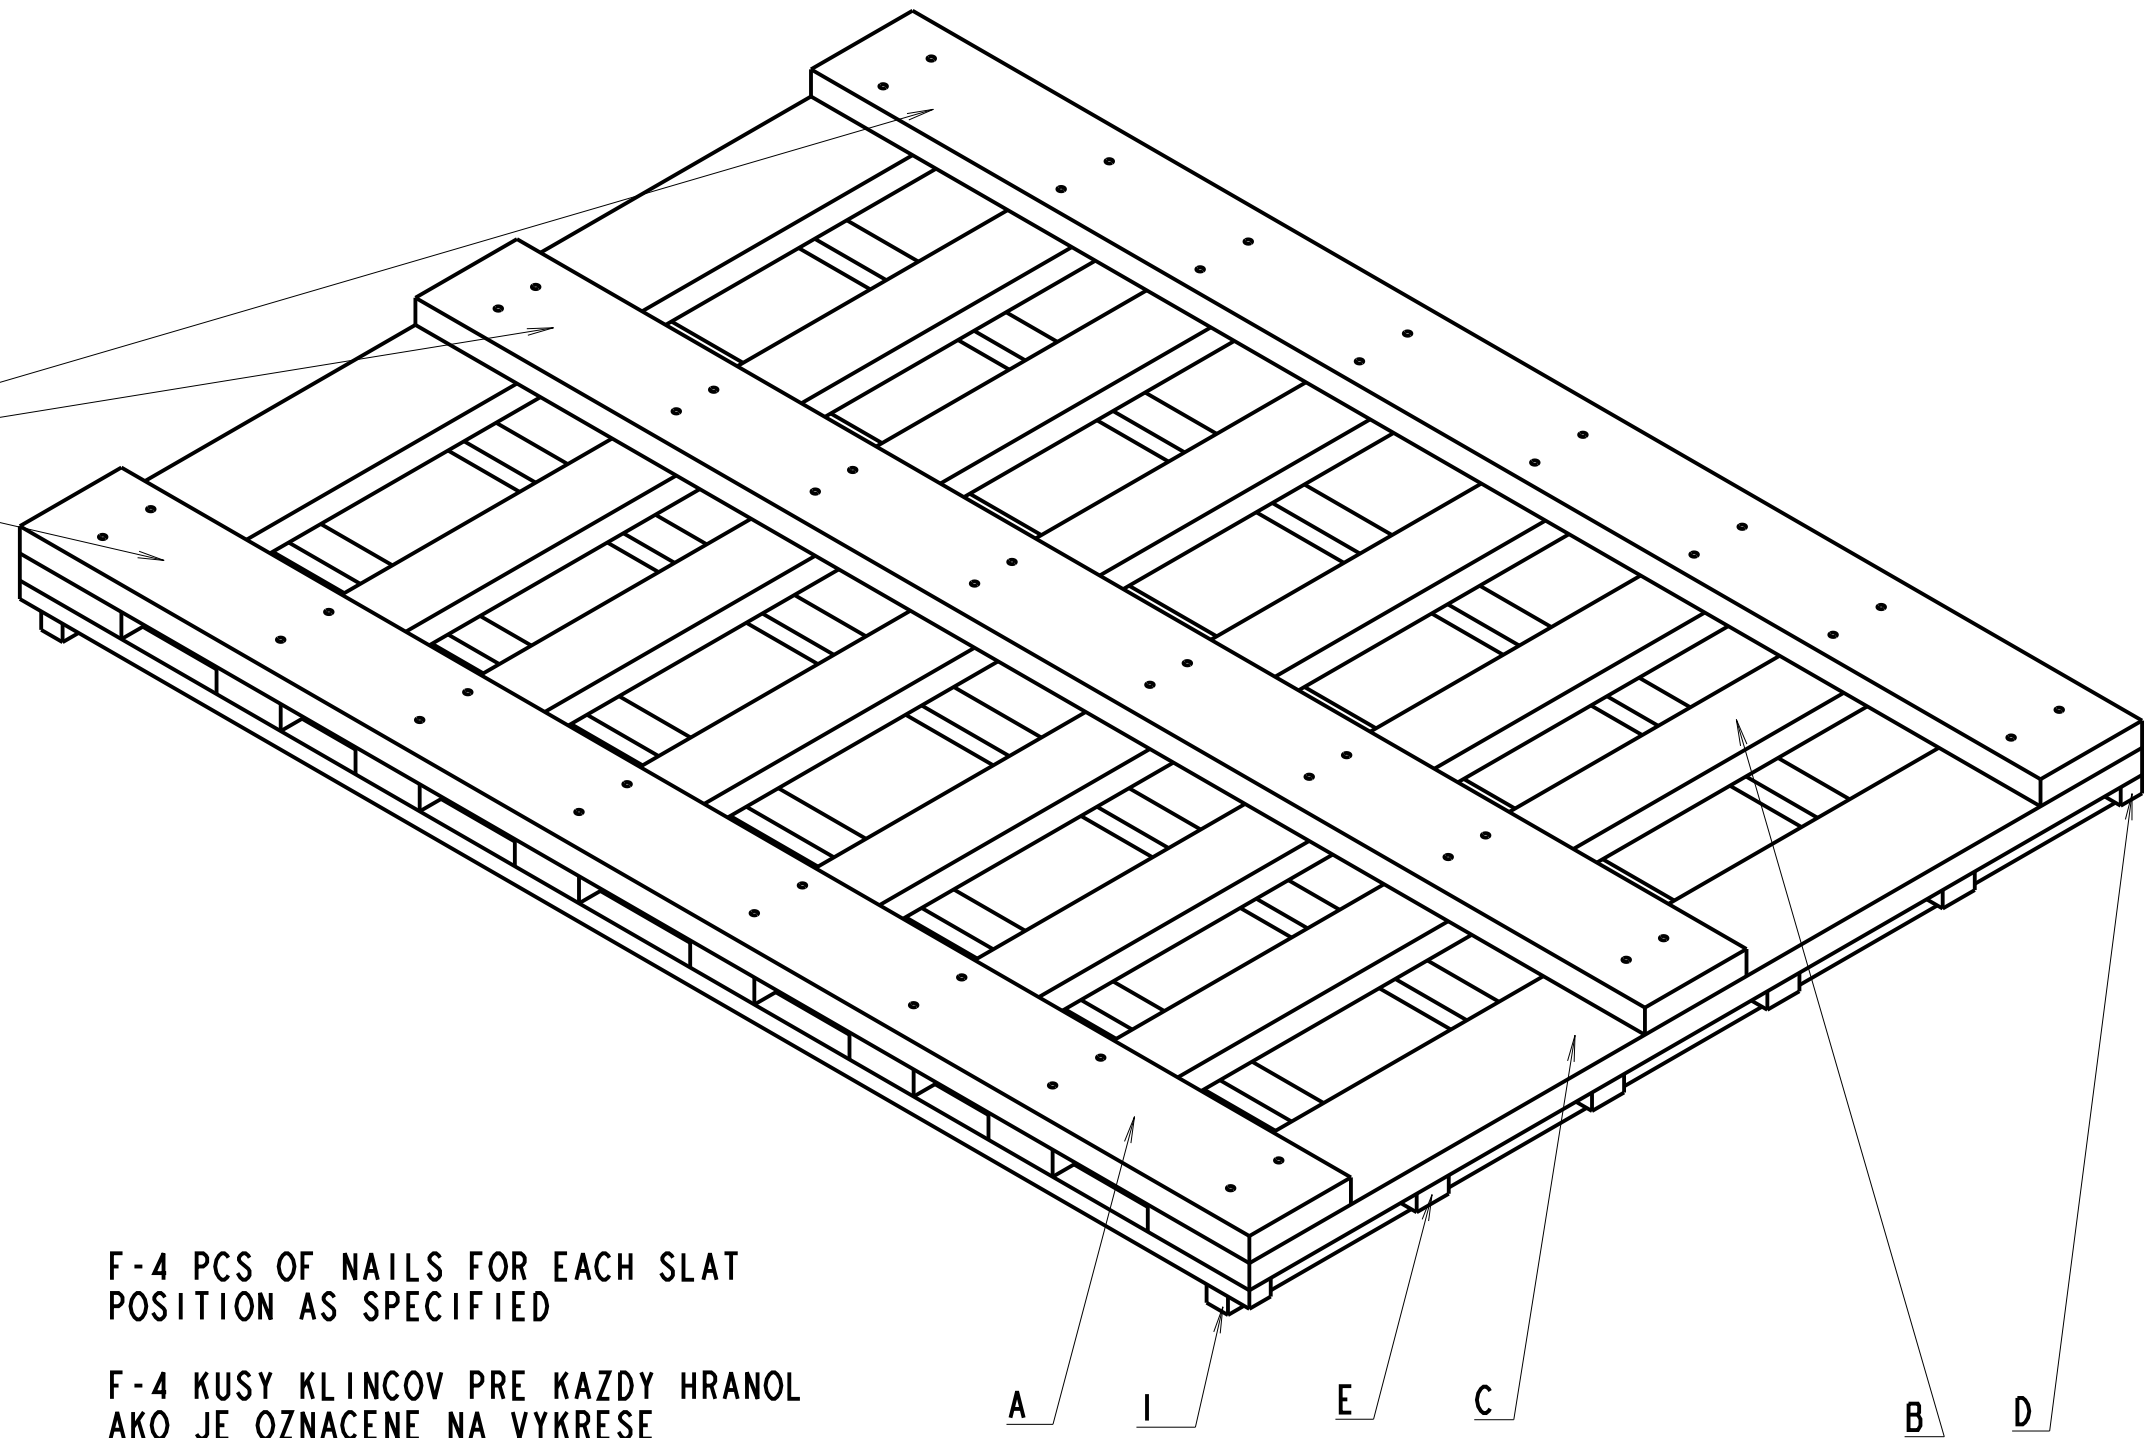


F-4 PCS OF NAILS FOR EACH SLAT
POSITION AS SPECIFIED

F-4 KUSY KLINCOV PRE KAŽDÝ HRANOL
AKO JE OZNACENE NA VYKRESE

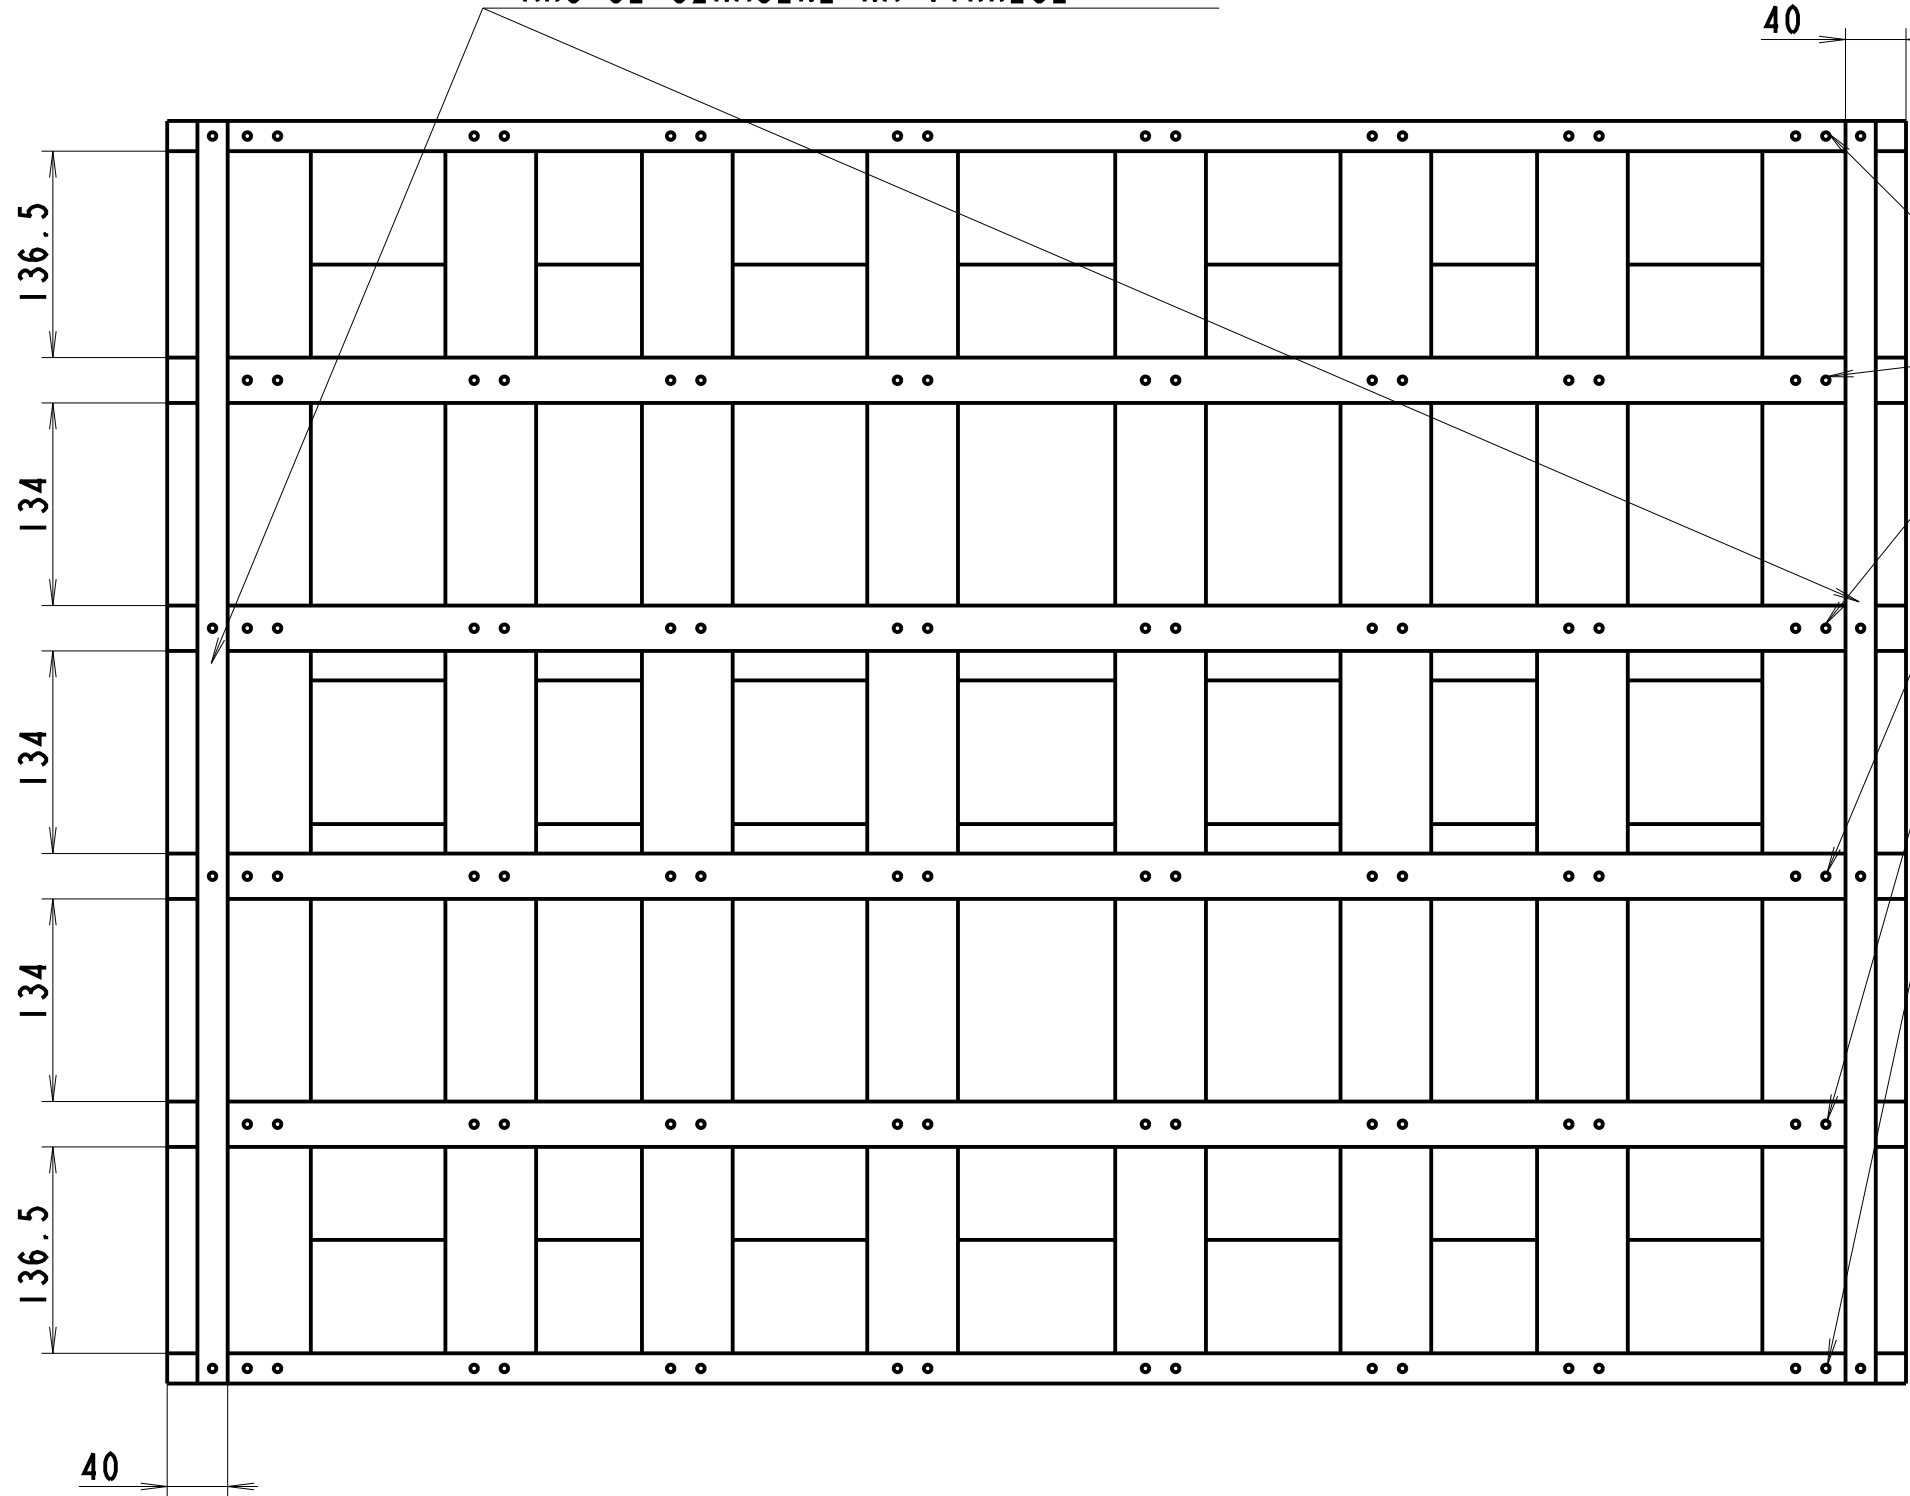

H-96 PCS OF NAILS
POSITION AS SPECIFIED

H-96 KUSOV KLINCOV
AKO JE OZNACENE NA VYKRESE

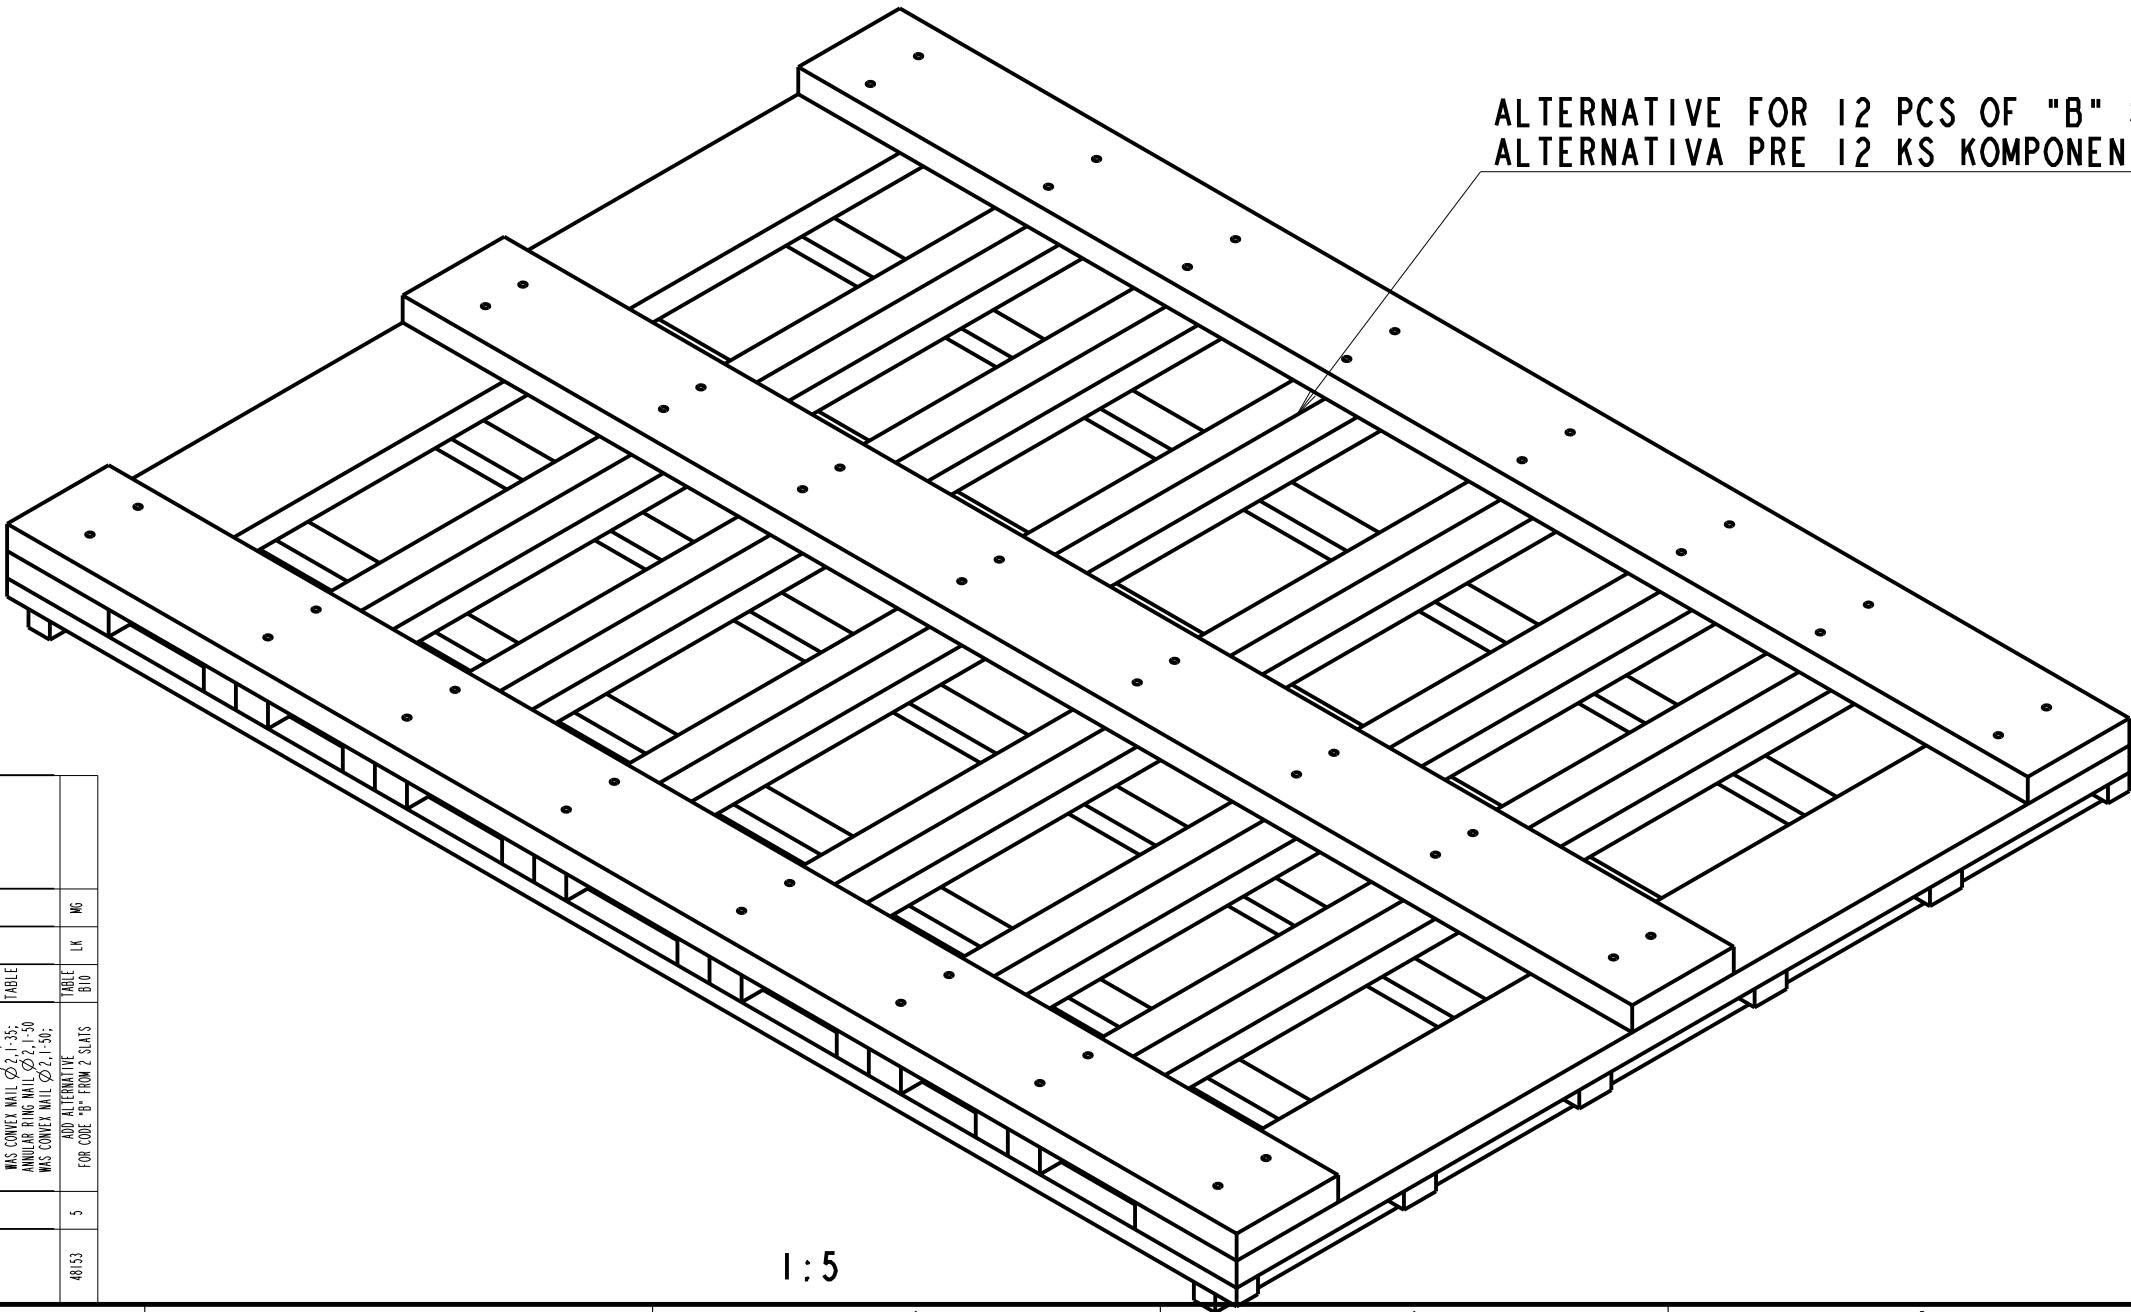

ALTERNATIVE FOR 12 PCS OF "B" SLATS
ALTERNATIVA PRE 12 KS KOMPONENTU "B"

- NOTES:
- 1-PALETTA MUST BE DRY (MAX. ALLOWED INTERNAL MOISTURE 23%), WITHOUT ALTERATIONS DANGEROUS FOR THE RESISTANCE/STRENGHT
 - 2-THE LARGE USE OF STRIPES NOT ACCORDING TO THE DRAWING OR BARK AND CRACKS ATTENDENCE WILL ALLOW THE REJECTION OF THE ENTIRE BATCH SUPPLIED
 - 3-FIXATION OF TRAVERSE ONLY WITH NAILS APPROVED BY EMBRACO TECHNICAL DEPARTMENT
 - 4-SEE TSS 00PS06, TSS 002100 FOR FURTHER REQUIREMENTS
 - 5-FOR MARK IPPC LOOK AT THE INTERNATIONAL STANDARD ISPM 15
 - 6-MUSI ZODPOVEDAT POŽIADAVKAM O NEBEZPEČNÝCH LÁTKACH PODĽA NORMY TSS 002420
 - 7-DIMENSIONS AND SPECIFICATIONS SIGNED WITH ▼▼⊕, SEE TSS 002470

- POZNAMKY:
- 1-PALETTA MUSI BYŤ SUCHÁ (MAX. POVOLEŇA VNÚTORŇA VLHKOSŤ 23%), BEZ ODCHÝLOK,KTORÉ SU NEBEZPEČNÉ PRE JEJ ODOLNOSŤ ALEBO PEVNOSŤ
 - 2-VACŠÍ VÝSKYT PRÁSKLIN ALEBO NEZODPOVEDAJÚCICH VÝKRESU,ALEBO DOSKY S KOROU, PRÁSKLINAMI SPOSOBIA VYRADENIE CELEJ DOBAVKY
 - 3-UPEVNENIE TRAVERZ LEN POMOCOU KLINCOV SCHVALENÝCH TECHNICKÝM ODDelením EMBRACO
 - 4-PRE ĎALŠIE POŽIADAVKY POZRI NORMY TSS 00PS06, TSS 002100
 - 5-PRE ZNAČKU IPPC POZRI MEDZINÁRODNÝ STANDARD ISPM 15
 - 6-MUSÍ ZODPOVEDAŤ POŽIADAVKAM O NEBEZPEČNÝCH LÁTKACH PODĽA NORMY TSS 002420
 - 7-KOTÝ A SPECIFIKÁCIE OZNACENÉ TAKTO ▼▼⊕, POZRI TSS 002470

REV.	REVISION	LO	BY	APP.	DATE
1	1-PALETTA MUST BE DRY (MAX. ALLOWED INTERNAL MOISTURE 23%), WITHOUT ALTERATIONS DANGEROUS FOR THE RESISTANCE/STRENGHT	03	ME	FR	11.07.2007
2	2-THE LARGE USE OF STRIPES NOT ACCORDING TO THE DRAWING OR BARK AND CRACKS ATTENDENCE WILL ALLOW THE REJECTION OF THE ENTIRE BATCH SUPPLIED	04	ME	FR	04.08.2007
3	3-FIXATION OF TRAVERSE ONLY WITH NAILS APPROVED BY EMBRACO TECHNICAL DEPARTMENT	05	ME	FR	05.09.2007
4	4-SEE TSS 00PS06, TSS 002100 FOR FURTHER REQUIREMENTS	06	ME	FR	06.10.2007
5	5-FOR MARK IPPC LOOK AT THE INTERNATIONAL STANDARD ISPM 15	07	ME	FR	07.11.2007
6	6-MUSI ZODPOVEDAT POŽIADAVKAM O NEBEZPEČNÝCH LÁTKACH PODĽA NORMY TSS 002420	08	ME	FR	08.12.2007
7	7-DIMENSIONS AND SPECIFICATIONS SIGNED WITH ▼▼⊕, SEE TSS 002470	09	ME	FR	09.01.2008

MATERIAL : ABETE SPRUCE SMREK	embraco	GEN. TOL. : ±2
CODE : DRAWN : Pavol BEZILA APP. : Dalia VECCHIA ECN : 508946	NAME UPPER COVER FOR NEW WOODEN PACKAGING MIDI VRCH PRE NOVE DREVENE BALENIE MIDI	ANG. TOL. : ±2° SCALE : 1:5 REPLACE No. 1.754.064
THIS MATERIAL IS CONFORMING AND SUITABLE TO THE EUROPEAN AND MAY NOT BE REWORKED, REJECTED, REJECTED OR WASTED		