


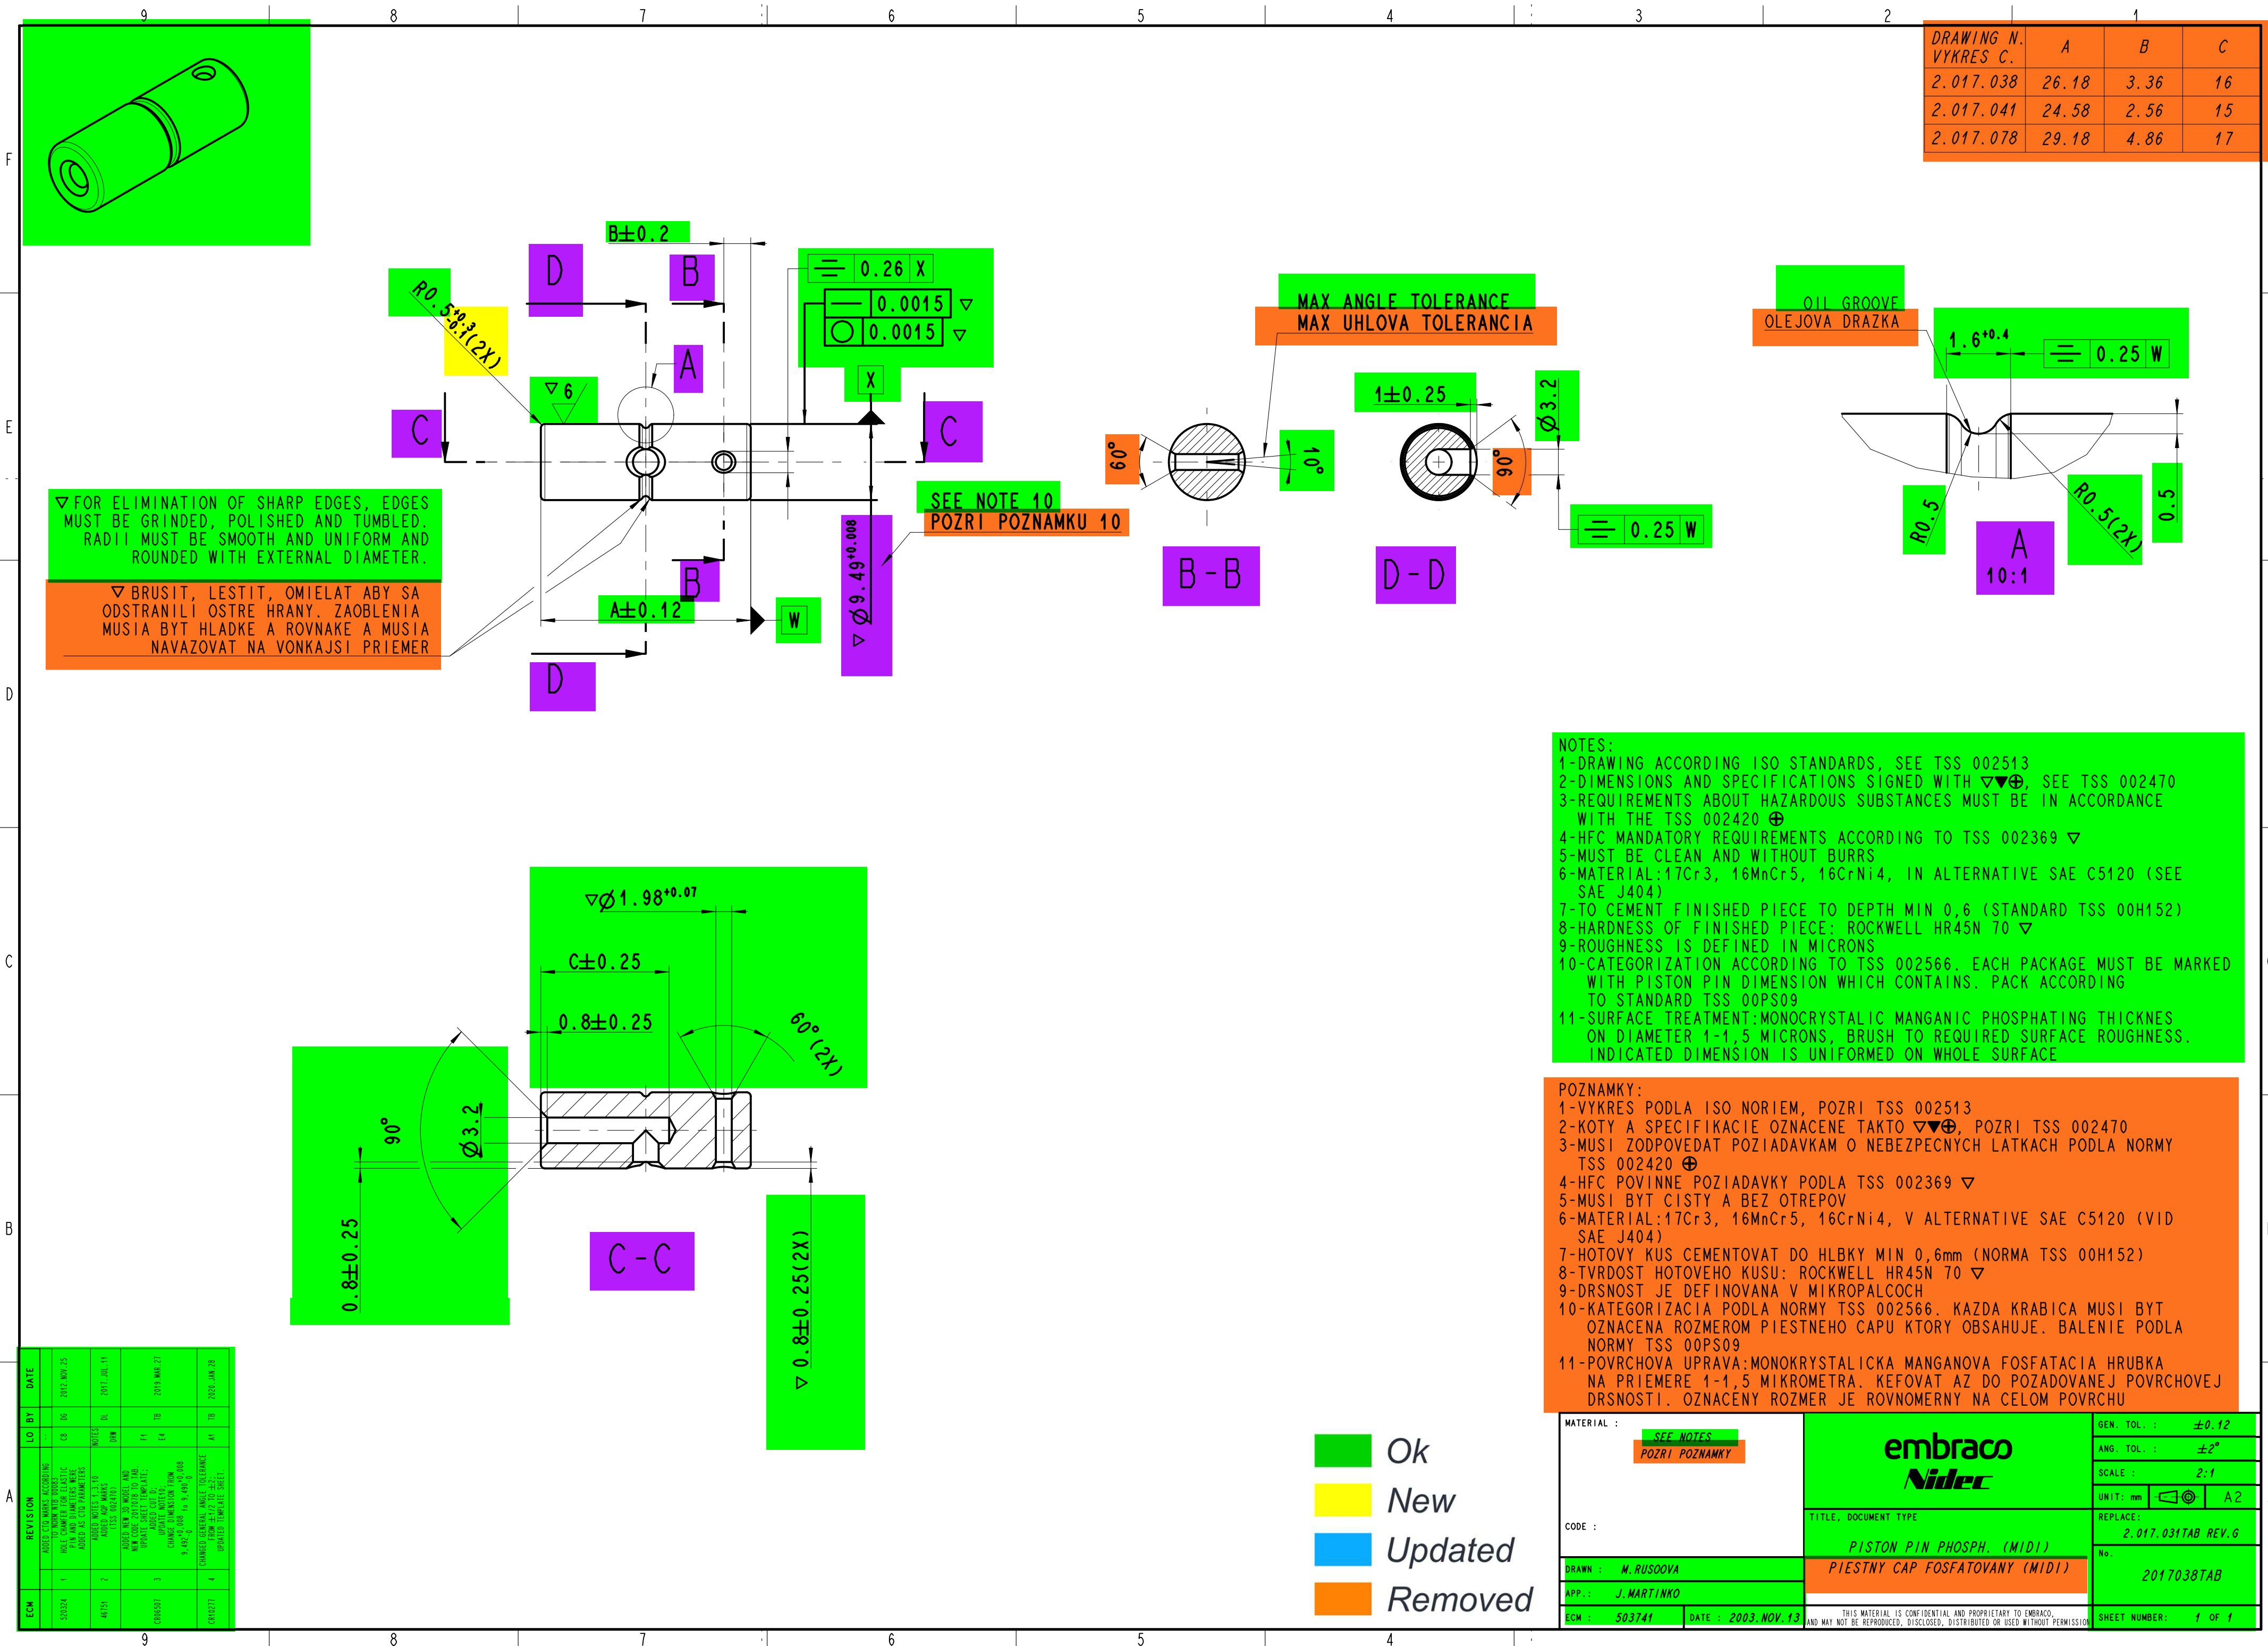

DRAWING N. VYKRES C.	A	B	C
2.017.038	26.18	3.36	16
2.017.041	24.58	2.56	15
2.017.078	29.18	4.86	17

▽ FOR ELIMINATION OF SHARP EDGES, EDGES MUST BE GRINDED, POLISHED AND TUMBLED. RADII MUST BE SMOOTH AND UNIFORM AND ROUNDED WITH EXTERNAL DIAMETER.

▽ BRUSIT, LESTIT, OMIELAT ABY SA ODSTRANILI OSTRE HRANY. ZAOBLLENIA MUSIA BYT HLADKE A ROVNAKE A MUSIA NAVAZOVAT NA VONKAJSI PRIEMER

NOTES:

1-DRAWING ACCORDING ISO STANDARDS, SEE TSS 002513

2-DIMENSIONS AND SPECIFICATIONS SIGNED WITH $\nabla\blacktriangledown\oplus$, SEE TSS 002470

3-REQUIREMENTS ABOUT HAZARDOUS SUBSTANCES MUST BE IN ACCORDANCE WITH THE TSS 002420 $\oplus$

4-HFC MANDATORY REQUIREMENTS ACCORDING TO TSS 002369 ∇

5-MUST BE CLEAN AND WITHOUT BURRS

6-MATERIAL:17Cr3, 16MnCr5, 16CrNi4, IN ALTERNATIVE SAE C5120 (SEE SAE J404)

7-TO CEMENT FINISHED PIECE TO DEPTH MIN 0,6 (STANDARD TSS 00H152)

8-HARDNESS OF FINISHED PIECE: ROCKWELL HR45N 70 ∇

9-ROUGHNESS IS DEFINED IN MICRONS

10-CATEGORIZATION ACCORDING TO TSS 002566. EACH PACKAGE MUST BE MARKED WITH PISTON PIN DIMENSION WHICH CONTAINS. PACK ACCORDING TO STANDARD TSS 00PS09

11-SURFACE TREATMENT:MONOCRYSTALLIC MANGANIC PHOSPHATING THICKNESS ON DIAMETER 1-1,5 MICRONS, BRUSH TO REQUIRED SURFACE ROUGHNESS. INDICATED DIMENSION IS UNIFORMED ON WHOLE SURFACE

POZNAMKY:

1-VYKRES PODLA ISO NORIEM, POZRI TSS 002513

2-KOTY A SPECIFIKACIE OZNACENE TAKTO $\nabla\blacktriangledown\oplus$, POZRI TSS 002470

3-MUSI ZODPOVEDAT POZIADAVKAM O NEBEZPECNÝCH LATKACH PODLA NORMY TSS 002420 $\oplus$

4-HFC POVINNE POZIADAVKY PODLA TSS 002369 ∇

5-MUSI BYT CISTY A BEZ OTREPOV

6-MATERIAL:17Cr3, 16MnCr5, 16CrNi4, V ALTERNATIVE SAE C5120 (VID SAE J404)

7-HOTOVÝ KUS CEMENTOVAT DO HLBKY MIN 0,6mm (NORMA TSS 00H152)

8-TVRDOST HOTOVEHO KUSU: ROCKWELL HR45N 70 ∇

9-DRSNOST JE DEFINOVANA V MIKROPALCOCH

10-KATEGORIZACIA PODLA NORMY TSS 002566. KAZDA KRABICA MUSI BYT OZNACENA ROZMEROM PIESTNEHO CAPU KTORÝ OBSAHUJE. BALENIE PODLA NORMY TSS 00PS09

11-POVRCHOVA UPRAVA:MONOKRYSTALICKA MANGANOVA FOSFATACIA HRUBKA NA PRIEMERE 1-1,5 MIKROMETRA. KEFOVAT AZ DO POZADOVANEJ POVRCHOVEJ DRSNOSTI. OZNACENÝ ROZMER JE ROVNOMERNÝ NA CELOM POVRCHU

ECN	REVISION	LO	BY	DATE
530324	1	ES	DB	2012.NOV.25
48751	2	WITER	DB	2017.JUL.11
530324	3	FI	EA	2019.MAR.27
530324	4	FI	EA	2020.JAN.28




Ok

New

Updated

Removed

MATERIAL : SEE NOTES POZRI POZNAMKY	embraco Nidec	GEN. TOL. : ± 0.12
CODE :	TITLE, DOCUMENT TYPE PISTON PIN PHOSPH. (MIDI) PIESTNY CAP FOSFATOVANY (MIDI)	ANG. TOL. : $\pm 2^\circ$
DRAWN : M.RUSOOVA		SCALE : 2:1
APP. : J.MARTINKO		UNIT: mm A2
ECN : 503741	DATE : 2003.NOV.13	REPLACE: 2.017.031TAB REV.6
THIS MATERIAL IS CONFIDENTIAL AND PROPRIETARY TO EMBRACO, AND MAY NOT BE REPRODUCED, DISCLOSED, DISTRIBUTED OR USED WITHOUT PERMISSION		No. 2017038TAB
		SHEET NUMBER: 1 OF 1

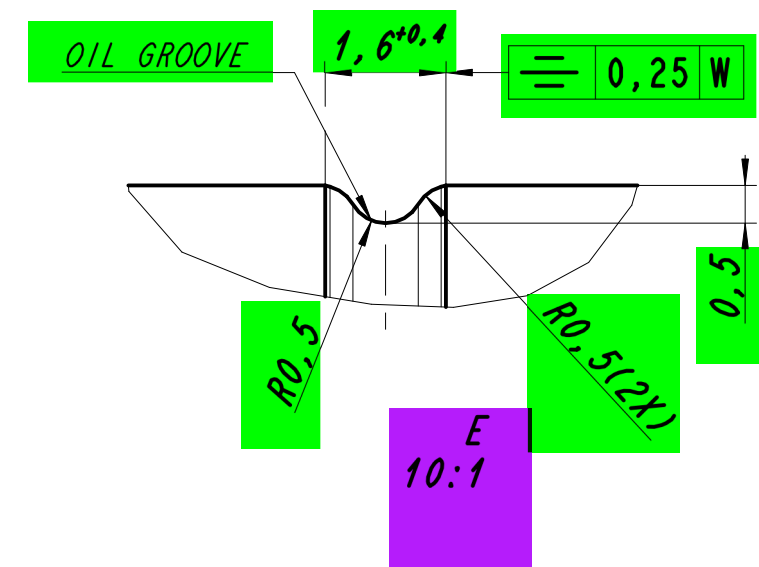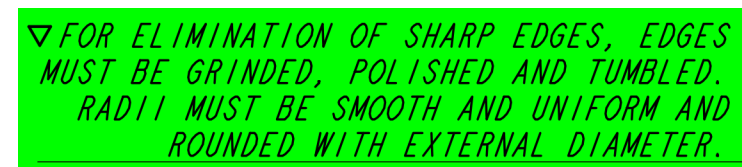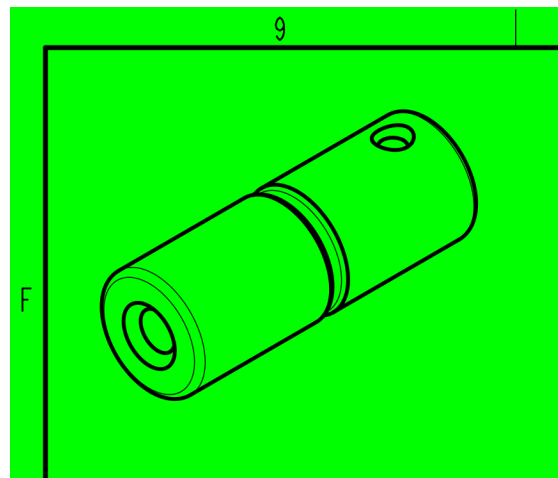

NOTES:

- 1-DRAWING ACCORDING ISO STANDARDS, SEE TSS 002513
- 2-DIMENSIONS AND SPECIFICATIONS SIGNED WITH $\nabla \blacktriangledown \oplus$, SEE TSS 002470
- 3-REQUIREMENTS ABOUT HAZARDOUS SUBSTANCES MUST BE IN ACCORDANCE WITH THE TSS 002420 $\oplus$
- 4-HFC MANDATORY REQUIREMENTS ACCORDING TO TSS 002369 ∇
- 5-MUST BE CLEAN AND WITHOUT BURRS
- 6-MATERIAL: 17Cr3, 16MnCr5, 16CrNi4, IN ALTERNATIVE SAE C5120 (SEE SAE J404)
- 7-TO CEMENT FINISHED PIECE TO DEPTH MIN 0,6 (STANDARD TSS 00H152)
- 8-HARDNESS OF FINISHED PIECE: ROCKWELL HR45N 70 ∇
- 9-ROUGHNESS IS DEFINED IN MICRONS
- 10-CATEGORIZATION ACCORDING TO TSS 002566. EACH PACKAGE MUST BE MARKED WITH PISTON PIN DIMENSION WHICH CONTAINS. PACK ACCORDING TO STANDARD TSS 00PS09, ONLY VALID FOR SK PLANT
- 11-SURFACE TREATMENT: MONOCRYSTALLIC MANGANIC PHOSPHATING THICKNESS ON DIAMETER 1-1,5 MICRONS, BRUSH TO REQUIRED SURFACE ROUGHNESS INDICATED DIMENSION IS UNIFORMED ON WHOLE SURFACE

13351513	CN	29,18	4,86	17	$9,49^{+0,008}_{+0,006}$
13351512					$9,49^{+0,006}_{+0,004}$
13351511					$9,49^{+0,004}_{+0,002}$
13351510					$9,49^{+0,002}_0$
13351509					$9,49^{+0,008}_{+0,006}$
13351507		26,18	3,36	16	$9,49^{+0,006}_{+0,004}$
13351506					$9,49^{+0,004}_{+0,002}$
13351505					$9,49^{+0,002}_0$
2017078					SK
2017041	24,58	2,56	15	$9,49^{+0,008}_0$	
2017038	26,18	3,36	16	$9,49^{+0,008}_0$	
CODE	PLANT	A	B	C	$\varnothing D$

ECM	REVISION	LO	BY	DATE
520324	1	03	05	2015. MAY. 25
				ADDED 2D DIMENSIONS ACCORDING TO PDA COMPUTER FOR PLASTIC PIN AND DIMENSIONS WERE ADDED AS TO DIMENSIONS WERE
467514	2	00155	06	2015. JUL. 11
				ADDED 2D WIRE 4.5 TO ADDED 2D WIRE 4.5 TO (155 000401)
CON6597	3	04	05	2015. MAY. 27
				ADDED 2D FOR WIRE AND NEW CODE 20150710 TO NEW UPDATE SHEET TEMPLATE. ADDED 2D FOR CON6597 TO NEW UPDATE SHEET TEMPLATE CON6597 DIRECTION FROM 3.40E+06, 609 TO 4.40E+06
CON6727	4	04	05	2015. JUL. 28
				CHANGED GENERAL ANGLE TOLERANCE FROM $\pm 1/2$ TO $\pm 1/4$ UPDATED TEMPLATE SHEET.
				EXCEL 3D WIRE 5
				INCL. 1.33557E+07 09-13
				DEL. 1.06E+25
				$9.9E+5$ WAS $9.9E+3$
				$1.0E+5$ WAS $1.0E+3$
				$2.0E+5$ WAS $2.0E+3$
				DELITE 90°
				AND 90° DELITE 90°
				DELITE SECTION AND DETAIL VIEW NAME
CON2020	5	04	05	2015. SEP. 12
				2012. JUL. 28

- Ok
- New
- Updated
- Removed

MATERIAL : SEE NOTES				GEN. TOL. : $\pm 0,12$		
				ANG. TOL. : $\pm 5^\circ$		
				SCALE : 2:1		
				UNIT : mm		A2
CODE :		TITLE, DOCUMENT TYPE		REPLACE:		
		PISTON PIN PHOSPH. (MIDI)		2.017.031TAB REV.G		
DRAWN : M.RUSOOVA				No.		
APP. : J.MARTINKO				2017038TAB		
ECM :	503741	DATE :	2003. NOV. 13	THIS MATERIAL IS CONFIDENTIAL AND PROPRIETARY TO EMBRACO, AND MAY NOT BE REPRODUCED, DISCLOSED, DISTRIBUTED OR USED WITHOUT PERMISSION		
				SHEET NUMBER: 1 OF 1		