



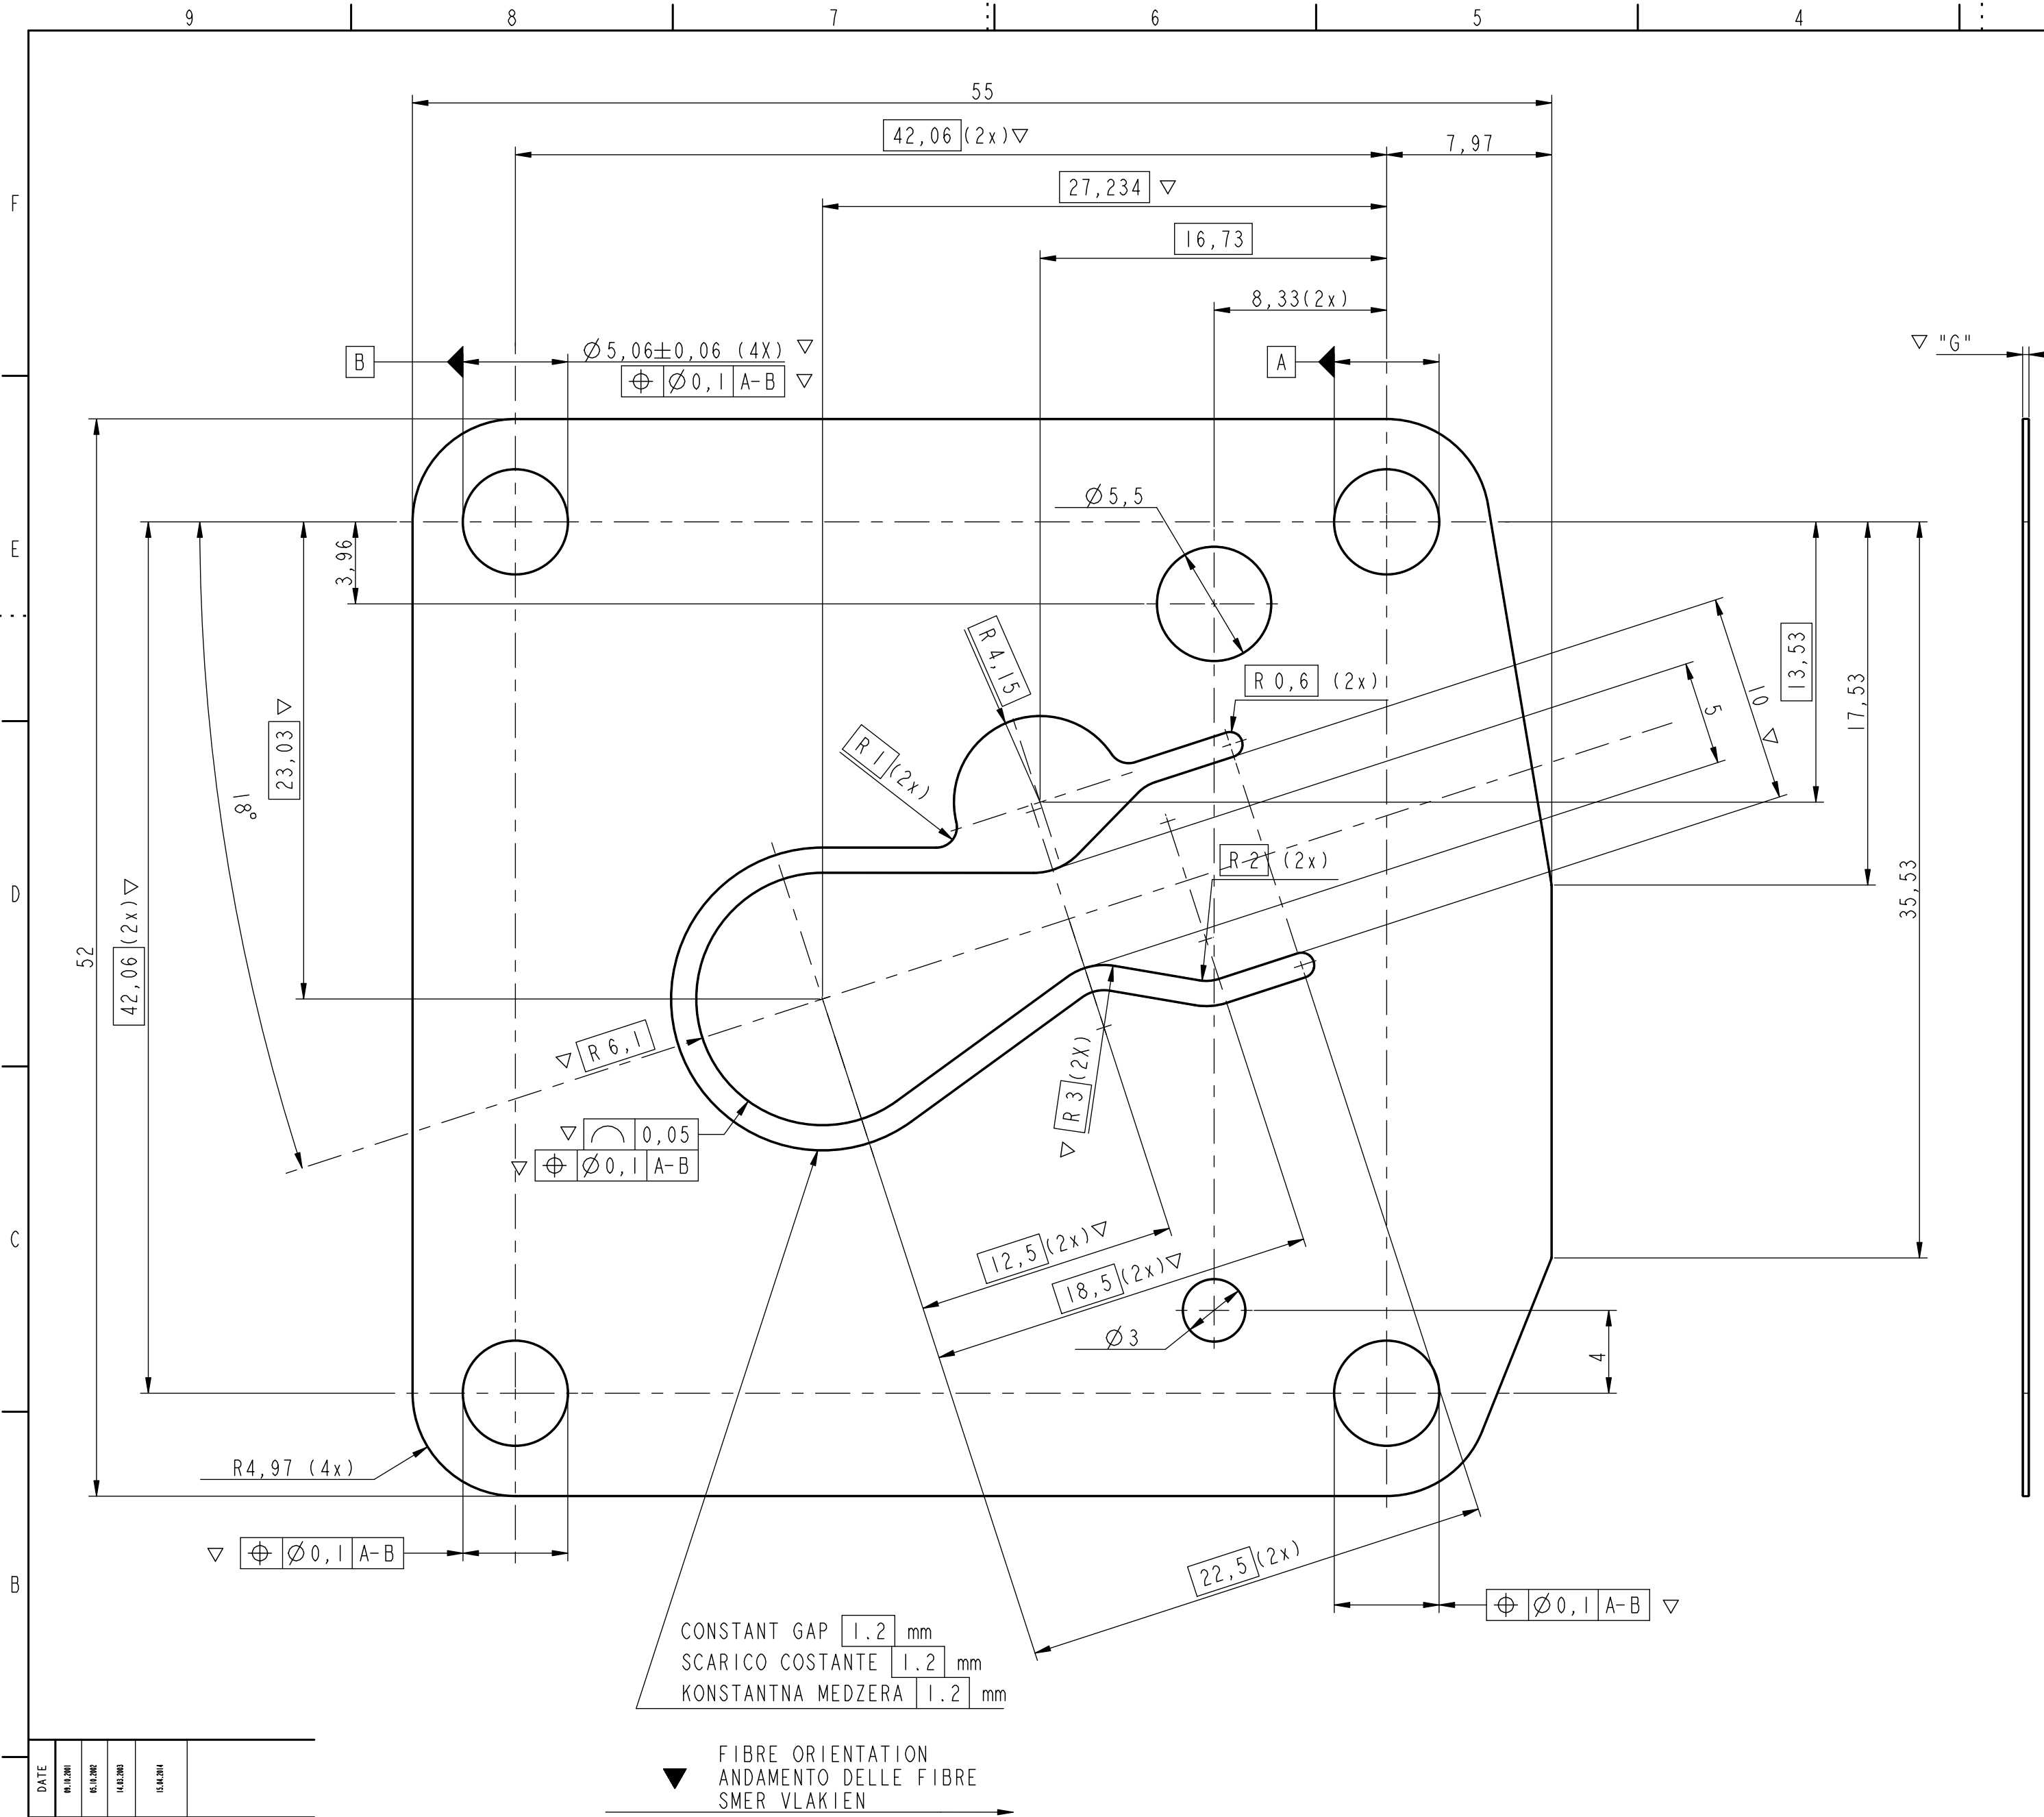

No. DISEGNO DRAWING No. VYKRES No.	COLORE COLOR FARBA	G
2.047.087		0.381±0.011
2.047.093	GIALLO YELLOW ŽLTÁ	0.305±0.009

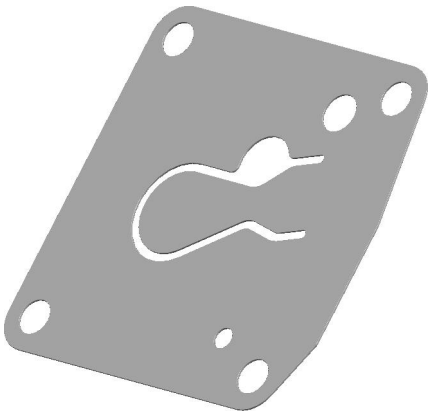

- NOTES
- 1-FOR COMPLETE INFORMATION ABOUT MATERIAL, FINISHING, METHOD OF MANUFACTURING AND CHECKING SEE SPECIFICATION TSS 00H026
 - 2-GRAIN OF MATERIAL MUST RUN PARALLEL TO HORIZONTAL AXIS AS SHOWN
 - 3-ISO FINISH 48 HOURS
 - 4-QUOTES AND SPECIFICATIONS SIGNED WITH $\nabla\nabla\oplus$, SEE TSS 002470
 - 5-HFC MANDATORY REQUIREMENTS ACCORDING TO TSS 002369
 - 6-REQUIREMENTS ABOUT HAZARDOUS SUBSTANCES MUST BE IN ACCORDANCE WITH TSS 002420

- NOTE
- 1-PER COMPLETE INFORMAZIONI SUL MATERIALE, FINITURA, METODO DI LAVORAZIONE E CONTROLLO, VEDERE NORMA TSS 00H026
 - 2-LE FIBRE DEL MATERIALE DEVONO ESSERE PARALLELE ALL'ASSE ORIZZONTALE COME INDICATO
 - 3-FINITURA ISO 48 ORE
 - 4-QUOTE E SPECIFICHE CONTRASEGNATE CON $\nabla\nabla\oplus$, VEDERE TSS 002470
 - 5-REQUISITI OBBLIGATORI HFC SECONDO TSS 002369
 - 6-REQUISITI CON MATERIALI RISCHIOSI DEVONO ESSERE SECONDO LA NORMA TSS 002420

- POZNAMKY
- 1-PRE KOMPLETNE INFORMACIE O MATERIÁLI, FINALNEJ UPRAVE, SPÔSOBE VÝROBY A KONTROLÝ POZRI NORMU TSS 00H026
 - 2-SMER VLAKIEN MATERIÁLU MUSI BYT ROVNOBEŽNÝ S HORIZONTÁLNOU OSOU AKO JE ZNAZORNENÉ
 - 3-DOKONČOVANIE ISO 48 HODIN
 - 4-KOTY A SPECIFIKÁCIE OZNACENÉ TAKTO $\nabla\nabla\oplus$, POZRI TSS 002470
 - 5-HFC POŽIADAVKY PODĽA NORMY TSS 002369
 - 6-MUSI ZODPOVEDAT POŽIADAVKAM O NEBEZPEČNÝCH LÁTKACH PODĽA NORMY TSS 002420

ECM	REVISION	LO	BY	DATE
THUMB	1	---	---	04.07.2001
SHIMS	2	---	---	05.10.2001
SHIMS	3	---	---	04.08.2001
SHIT	4	---	---	04.08.2001

MATERIAL : STAINLESS STEEL ACCIAIO INOX NEREZOVÁ OCEL	embraco	GEN. TOL. : ±0.12
		ANG. TOL. : ±1/2°
CODE :	NAME	SCALE : 4:1
DRAWN : GIUSEPPE BO - 05.07.2001	SUCTION VALVE LEAF FOGLIA VALVOLA ASPIRAZIONE NASAVACÍ VENTIL	REPLACE
APP. : GIUSEPPE BO - 09.10.2001		No.
ECM : TD728867	2.047.087 TAB	