


REV	REVISION	LOG BY	DATE	DESCRIPTION	DATE
1	INITIAL DESIGN	LOG	2019.03.28	INITIAL DESIGN	2019.03.28
2	DESIGN CHANGES	LOG	2019.04.02	DESIGN CHANGES	2019.04.02
3	DESIGN CHANGES	LOG	2019.04.02	DESIGN CHANGES	2019.04.02
4	DESIGN CHANGES	LOG	2019.04.02	DESIGN CHANGES	2019.04.02
5	DESIGN CHANGES	LOG	2019.04.02	DESIGN CHANGES	2019.04.02
6	DESIGN CHANGES	LOG	2019.04.02	DESIGN CHANGES	2019.04.02
7	DESIGN CHANGES	LOG	2019.04.02	DESIGN CHANGES	2019.04.02
8	DESIGN CHANGES	LOG	2019.04.02	DESIGN CHANGES	2019.04.02
9	DESIGN CHANGES	LOG	2019.04.02	DESIGN CHANGES	2019.04.02
10	DESIGN CHANGES	LOG	2019.04.02	DESIGN CHANGES	2019.04.02
11	DESIGN CHANGES	LOG	2019.04.02	DESIGN CHANGES	2019.04.02
12	DESIGN CHANGES	LOG	2019.04.02	DESIGN CHANGES	2019.04.02

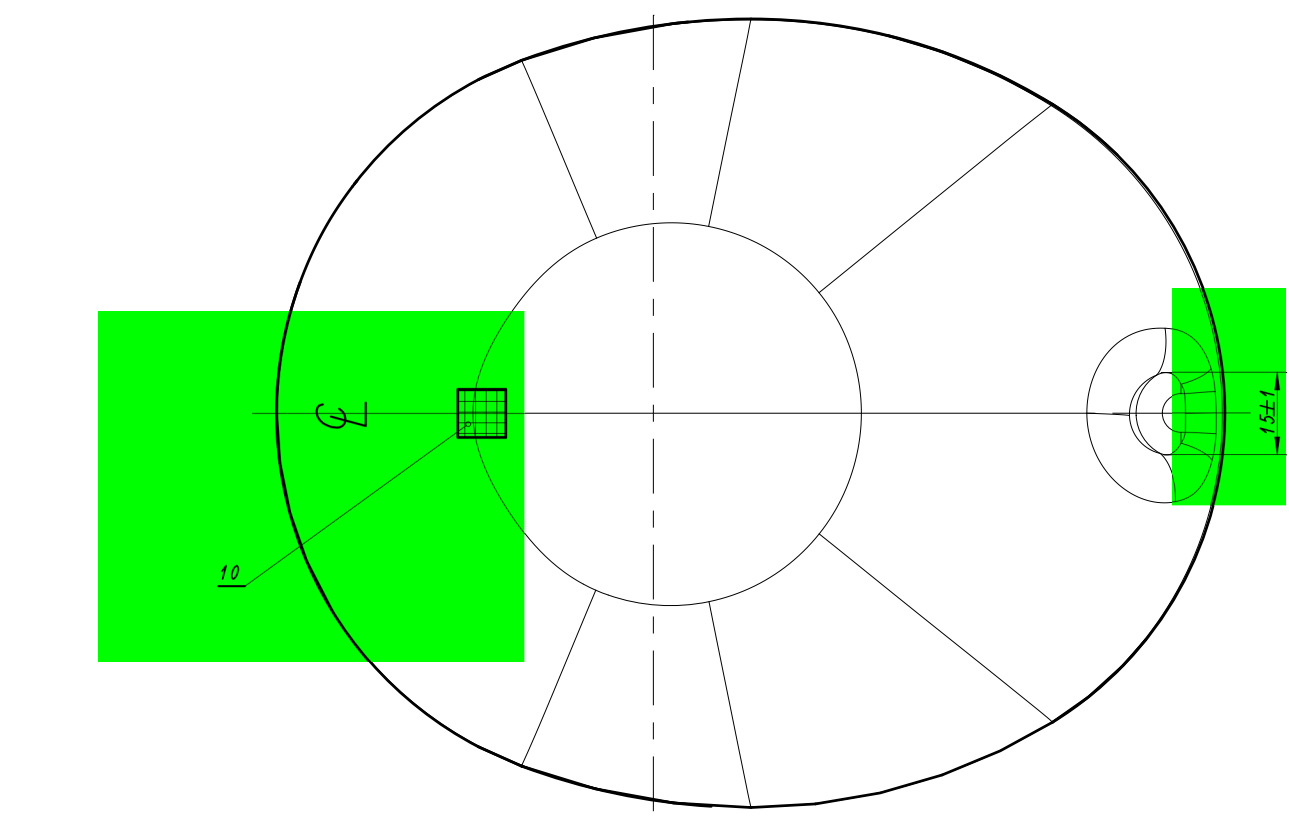

- Ok
- New
- Updated
- Removed

NOTES:

- DRAWING ACCORDING TO ISO STANDARDS, SEE TSS 002513.
- DIMENSIONS AND SPECIFICATIONS SIGNED WITH , SEE TSS 002470.
- REQUIREMENTS ABOUT HAZARDOUS SUBSTANCES ACCORDING TO TSS 002420.⊕
- HFC MANDATORY REQUIREMENTS ACCORDING TO TSS 002369.▼
- PROTECT AGAINST RUST ACCORDING TO TSS 002369.
- FREE OF DETACHABLE BURRS.
- MUST PASS THE HYDROSTATIC PRESSURE TEST ACCORDING TO STANDARD TSS 007L17.
- THE METAL SPINNING MUST BE ACCORDING TO STANDARD TSS 00H170.
- MINIMUM THICKNESS OF 1,50 mm IN THE SPINNING AREAS.
- IDENTIFICATION IN THIS POSITION, MAXIMUM DIAMETER OF 10 mm.
- FOLLOW THE STANDARD THICKNESS OF THE TABLE.
- COVER FREQUENCY ACCORDING TO TSS 002529.
- BASIC GEOMETRY ACCORDING TO 3D MODEL.

2059171	40,5	51,5	112111091	TSS 001615
CODE	"X"	"Y"	MATERIAL	STANDARD

MATERIAL :
HOT ROLLED CARBON STEEL STRIP

CODE :
SEE TABLE

DRAWN :
GILIARDE BARNI

APP.:
CARLOS EDUARDO VENDRAMI

ECN :
CROS116

embraco
Nidec

TITLE, DOCUMENT TYPE
SHELL COVER

GEN. TOL. :
±0,5



ANG. TOL. :
±2°

SCALE :
1:1




UNIT: mm
REPLACE:  A1

No.
2059171





SHEET NUMBER:
1 OF 1

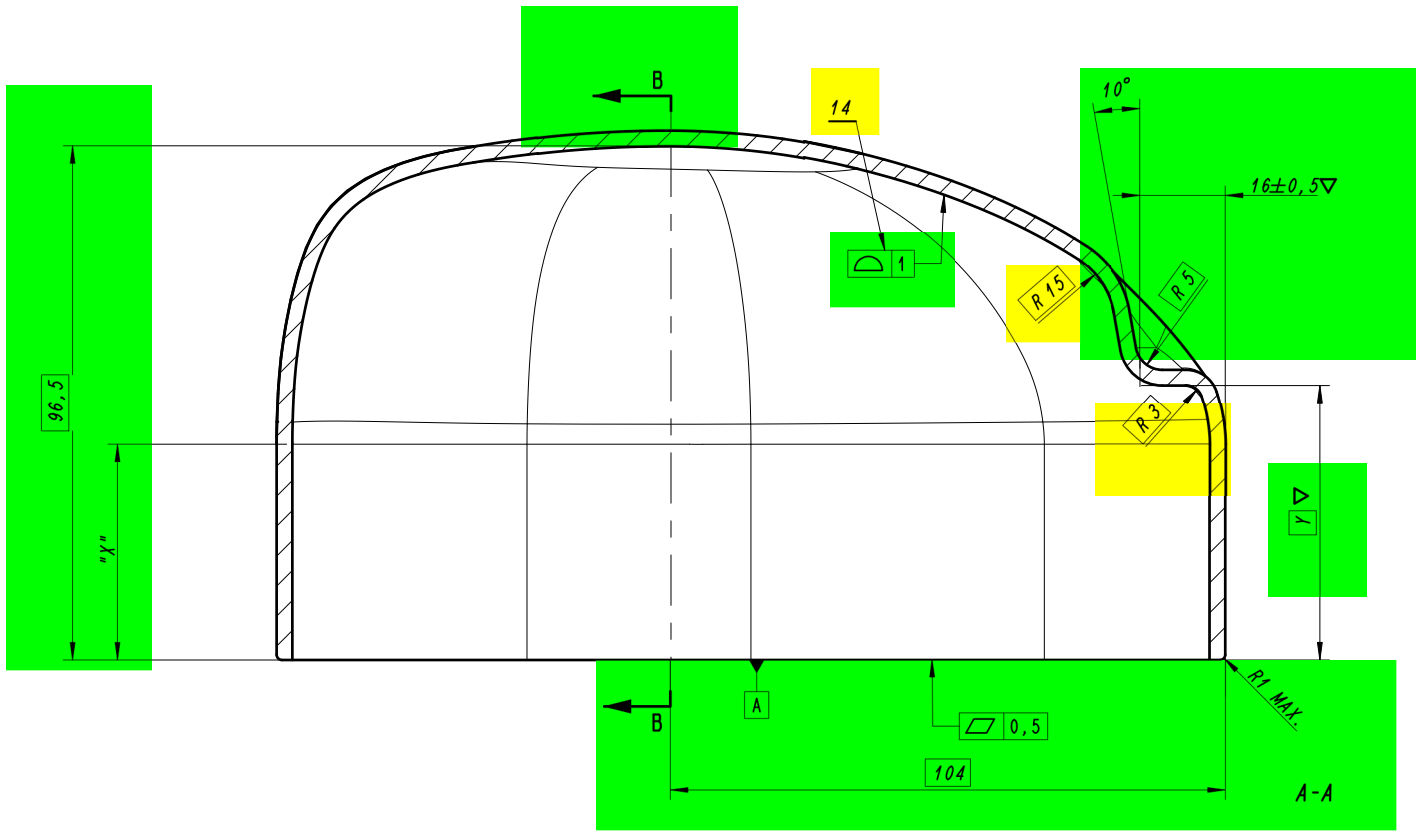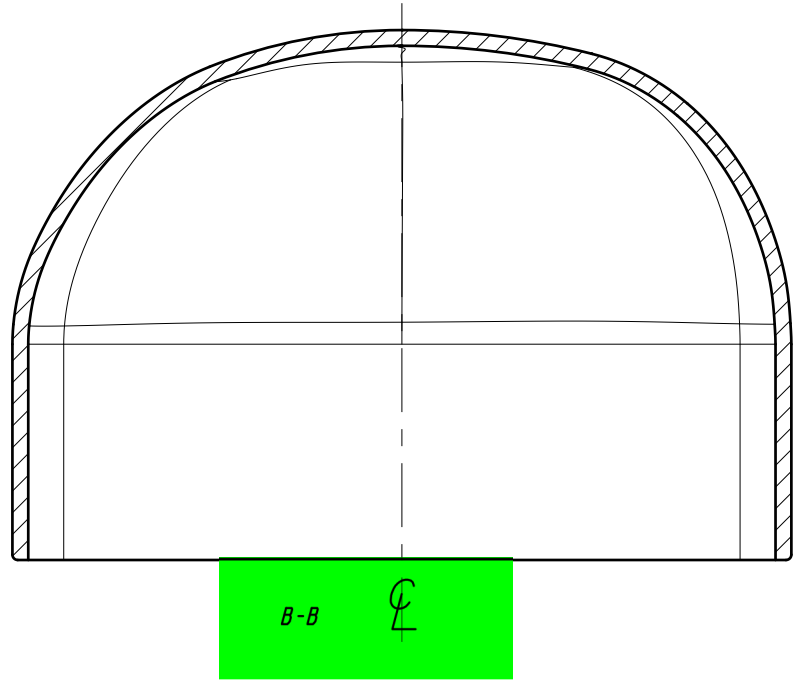



OBSERVATIONS:
1 - THE MAXIMUM ACCEPTABLE AIRGAP BETWEEN HOUSING AND COVER IS 1,1mm AT THE TOP OF THE BODY AND COVER CLOSE LENGTH AND WIDTH MEASUREMENT AT THIS POINT.
2 - THE COVER X HOUSING ASSEMBLY SHALL BE POSSIBLE TO BE DONE MANUALLY.

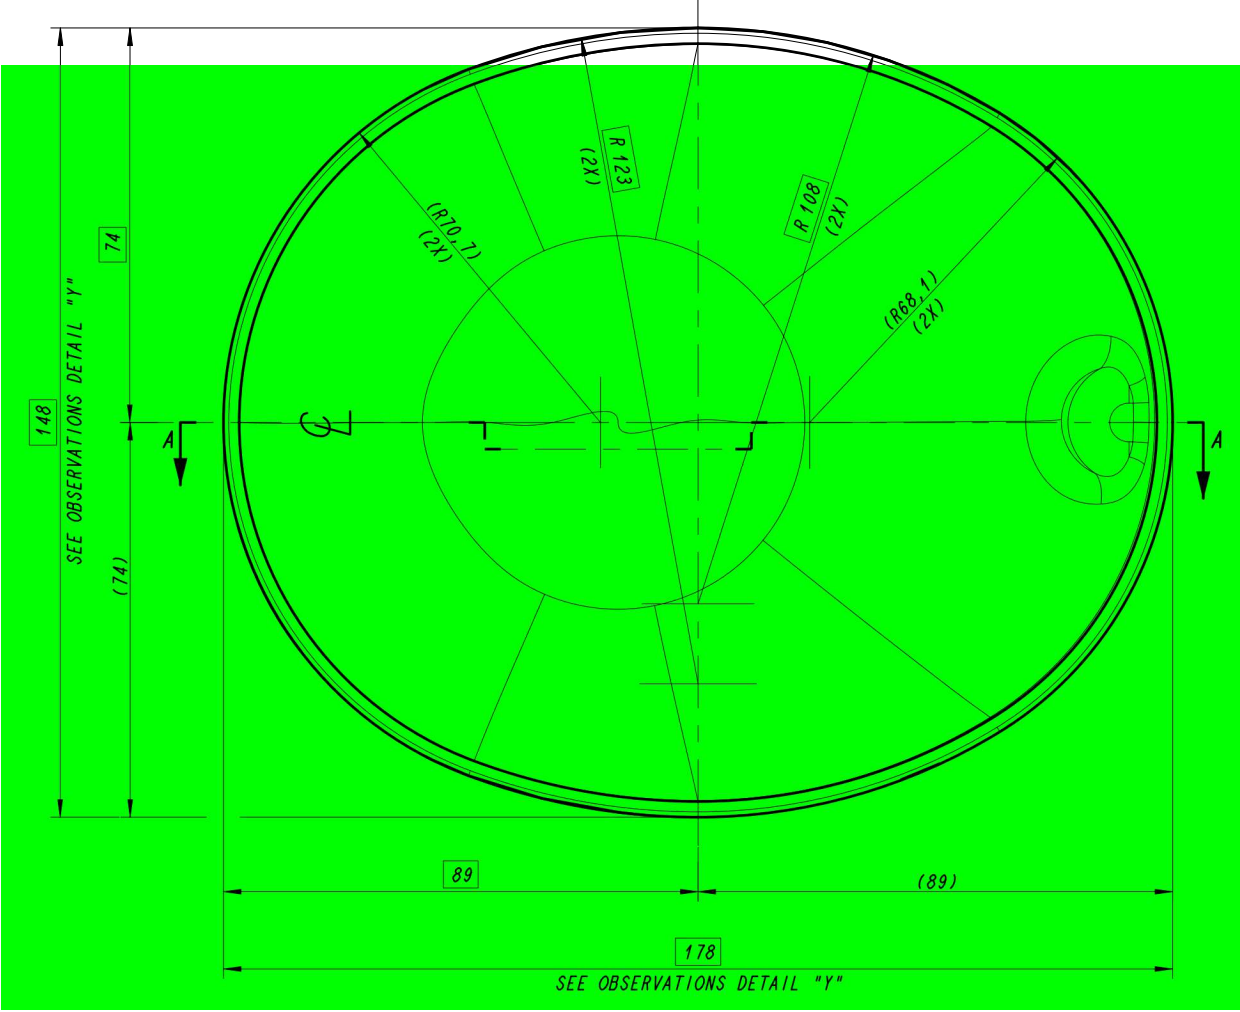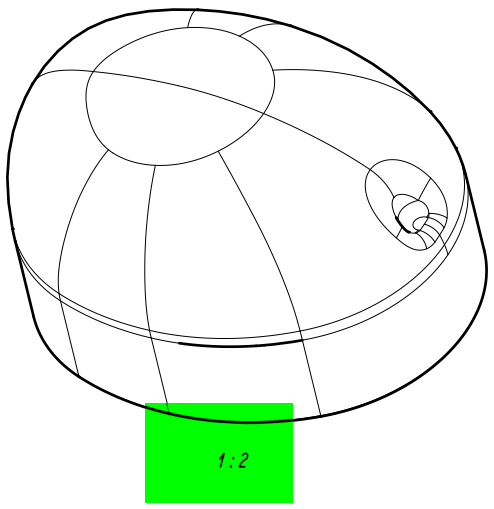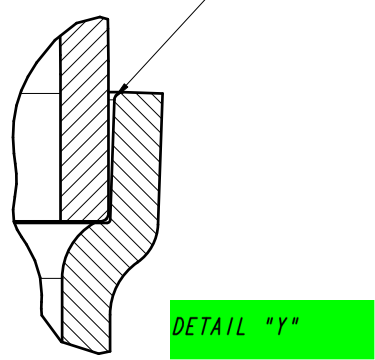

REVISION	LOG BY	DATE
1	2019.03.25	2019.03.25
2	2019.03.25	2019.03.25
3	2019.03.25	2019.03.25
4	2019.03.25	2019.03.25
5	2019.03.25	2019.03.25
6	2019.03.25	2019.03.25
7	2019.03.25	2019.03.25
8	2019.03.25	2019.03.25
9	2019.03.25	2019.03.25
10	2019.03.25	2019.03.25
11	2019.03.25	2019.03.25
12	2019.03.25	2019.03.25
13	2019.03.25	2019.03.25
14	2019.03.25	2019.03.25
15	2019.03.25	2019.03.25
16	2019.03.25	2019.03.25
17	2019.03.25	2019.03.25
18	2019.03.25	2019.03.25
19	2019.03.25	2019.03.25
20	2019.03.25	2019.03.25
21	2019.03.25	2019.03.25
22	2019.03.25	2019.03.25
23	2019.03.25	2019.03.25
24	2019.03.25	2019.03.25
25	2019.03.25	2019.03.25
26	2019.03.25	2019.03.25
27	2019.03.25	2019.03.25
28	2019.03.25	2019.03.25
29	2019.03.25	2019.03.25
30	2019.03.25	2019.03.25
31	2019.03.25	2019.03.25
32	2019.03.25	2019.03.25
33	2019.03.25	2019.03.25
34	2019.03.25	2019.03.25
35	2019.03.25	2019.03.25
36	2019.03.25	2019.03.25
37	2019.03.25	2019.03.25
38	2019.03.25	2019.03.25
39	2019.03.25	2019.03.25
40	2019.03.25	2019.03.25
41	2019.03.25	2019.03.25
42	2019.03.25	2019.03.25
43	2019.03.25	2019.03.25
44	2019.03.25	2019.03.25
45	2019.03.25	2019.03.25
46	2019.03.25	2019.03.25
47	2019.03.25	2019.03.25
48	2019.03.25	2019.03.25
49	2019.03.25	2019.03.25
50	2019.03.25	2019.03.25
51	2019.03.25	2019.03.25
52	2019.03.25	2019.03.25
53	2019.03.25	2019.03.25
54	2019.03.25	2019.03.25
55	2019.03.25	2019.03.25
56	2019.03.25	2019.03.25
57	2019.03.25	2019.03.25
58	2019.03.25	2019.03.25
59	2019.03.25	2019.03.25
60	2019.03.25	2019.03.25
61	2019.03.25	2019.03.25
62	2019.03.25	2019.03.25
63	2019.03.25	2019.03.25
64	2019.03.25	2019.03.25
65	2019.03.25	2019.03.25
66	2019.03.25	2019.03.25
67	2019.03.25	2019.03.25
68	2019.03.25	2019.03.25
69	2019.03.25	2019.03.25
70	2019.03.25	2019.03.25
71	2019.03.25	2019.03.25
72	2019.03.25	2019.03.25
73	2019.03.25	2019.03.25
74	2019.03.25	2019.03.25
75	2019.03.25	2019.03.25
76	2019.03.25	2019.03.25
77	2019.03.25	2019.03.25
78	2019.03.25	2019.03.25
79	2019.03.25	2019.03.25
80	2019.03.25	2019.03.25
81	2019.03.25	2019.03.25
82	2019.03.25	2019.03.25
83	2019.03.25	2019.03.25
84	2019.03.25	2019.03.25
85	2019.03.25	2019.03.25
86	2019.03.25	2019.03.25
87	2019.03.25	2019.03.25
88	2019.03.25	2019.03.25
89	2019.03.25	2019.03.25
90	2019.03.25	2019.03.25
91	2019.03.25	2019.03.25
92	2019.03.25	2019.03.25
93	2019.03.25	2019.03.25
94	2019.03.25	2019.03.25
95	2019.03.25	2019.03.25
96	2019.03.25	2019.03.25
97	2019.03.25	2019.03.25
98	2019.03.25	2019.03.25
99	2019.03.25	2019.03.25
100	2019.03.25	2019.03.25

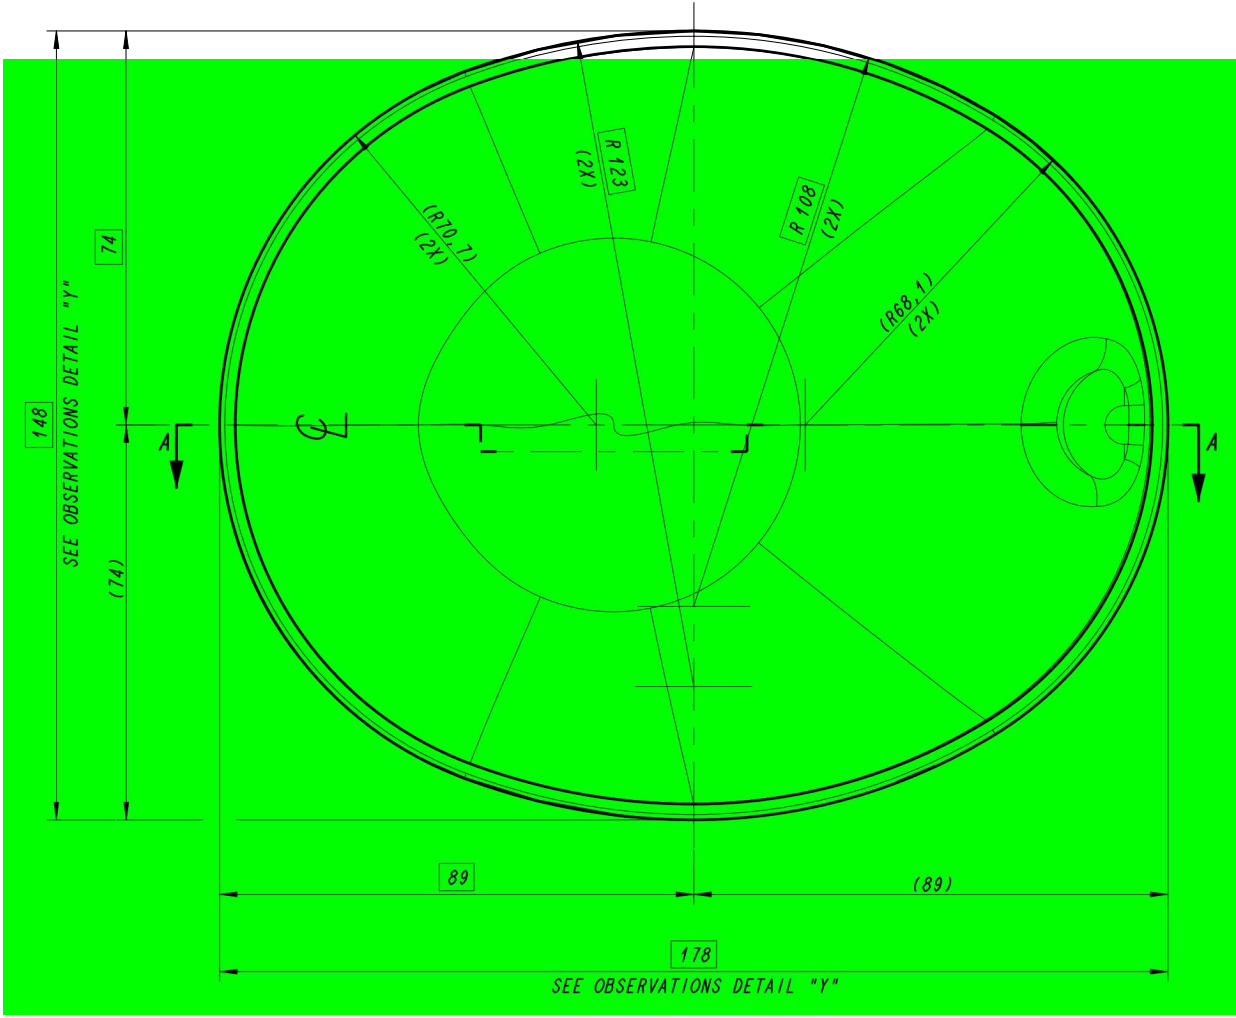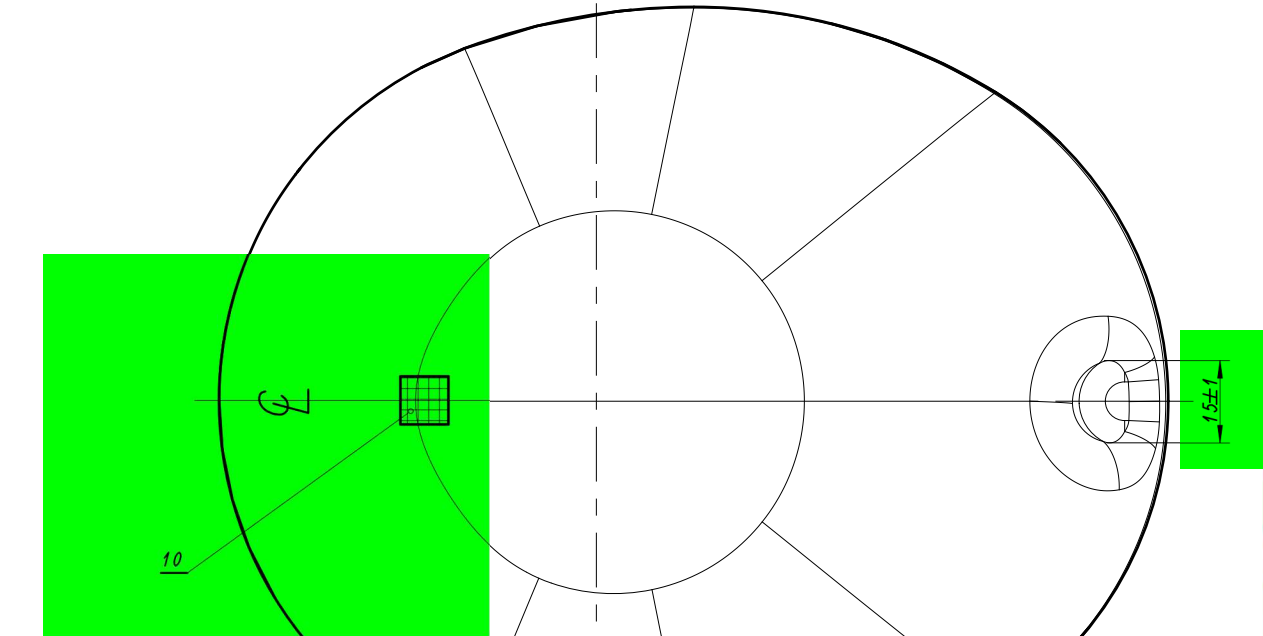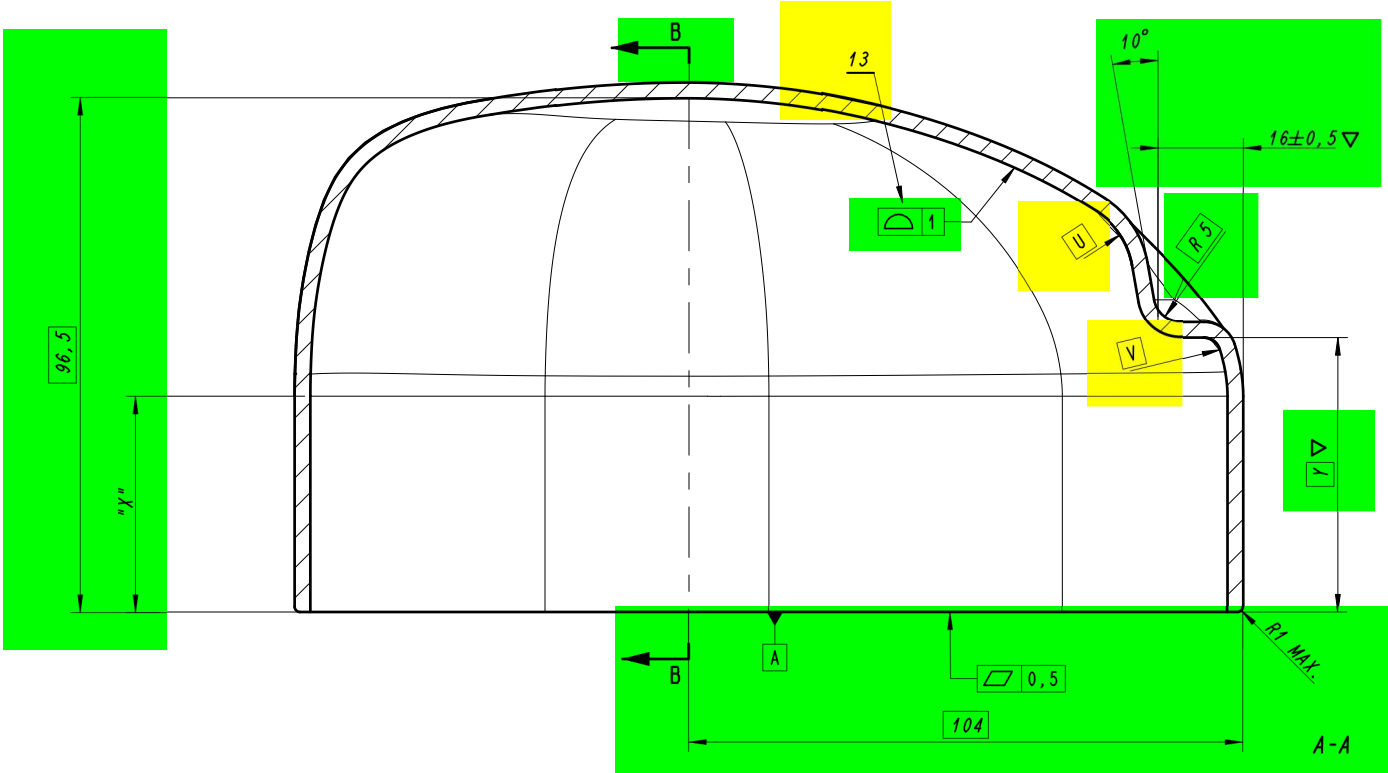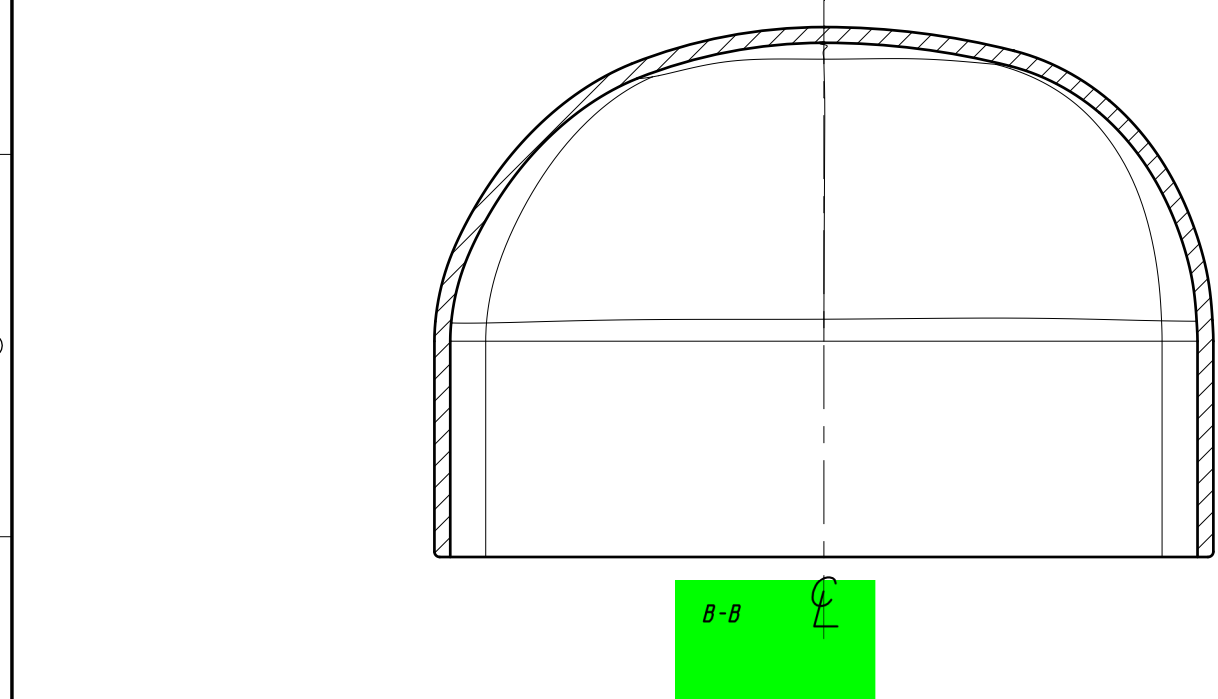

OBSERVATIONS:
1 - THE MAXIMUM ACCEPTABLE AIRGAP BETWEEN HOUSING AND COVER IS 1,1mm AT THE TOP OF THE BODY AND COVER CLOSE LENGTH AND WIDTH MEASUREMENT AT THIS POINT.
2 - THE COVER X HOUSING ASSEMBLY SHALL BE POSSIBLE TO BE DONE MANUALLY.

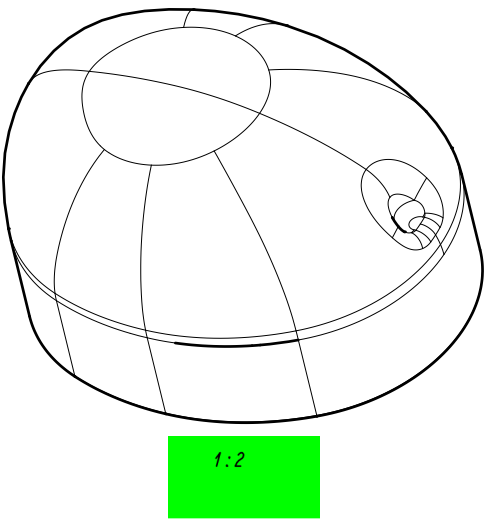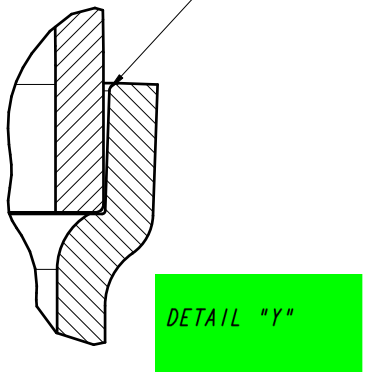

NOTES:
1 - DRAWING ACCORDING TO ISO STANDARDS, SEE TSS 002513.
2 - DIMENSIONS AND SPECIFICATIONS SIGNED WITH $\nabla \oplus$, SEE TSS 002470.
3 - REQUIREMENTS ABOUT HAZARDOUS SUBSTANCES ACCORDING TO TSS 002420 $\oplus$
4 - HFC MANDATORY REQUIREMENTS ACCORDING TO TSS 002369. ∇
5 - PROTECT AGAINST RUST ACCORDING TO TSS 002369.
6 - FREE OF DETACHABLE BURRS.
7 - MUST PASS THE HYDROSTATIC PRESSURE TEST ACCORDING TO STANDARD TSS 00117.
8 - THE METAL SPINNING MUST BE ACCORDING TO STANDARD TSS 001170.
9 - MINIMUM THICKNESS OF 1,50 mm IN THE SPINNING AREAS.
10 - IDENTIFICATION IN THIS POSITION, MAXIMUM DIAMETER OF 10 mm.
11 - FOLLOW THE STANDARD THICKNESS OF THE TABLE.
12 - COVER FREQUENCY ACCORDING TO TSS 002529.
13 - BASIC GEOMETRY ACCORDING TO 3D MODEL.

Ok
New
Updated
Removed

113346065	R15.5	R3.5	40,5	51,5	112111076	TSS 001615
2059171	R15	R3	40,5	51,5	112111091	TSS 001615
CODE	U	V	*X*	*Y*	MATERIAL	STANDARD
MATERIAL: HOT ROLLED CARBON STEEL STRIP SEE TABLE					embraco Nidec	
CODE:					GEN. TOL.: $\pm 0,5$	
DRAWN: GILARDE BARNI					ANG. TOL.: $\pm 0^\circ$	
APP.: CARLOS EDUARDO VENDRAMI					SCALE: 1:1	
ECM: CROS116					UNIT: mm	
DATE: 2019. MAR. 28					A1	
					REPLACE:	
					No.	
					2059171	
					SHEET NUMBER: 1 OF 1	