COMPONENT	DIMENSIONS	QTY
A	1150x60x22	1
B	1150x95x22	7
C	835x95x22	5
D	835x60x22	6
E	95x95x75	9
F	ANNULAR RING NAIL Ø2,1-35	66
G	▽ANNULAR RING NAIL Ø2,5-70	78
H	CLIP BK S25 (25x25x1,4)	16
2.998.269 ALTER. 2.206.030	ANNULAR RING NAIL Ø3-28 SCREW FOR WOOD Ø4x25	40
2.037.146	PIN FOR WOODEN PACKING	40

ON THIS AND DIAGONAL BLOCK PRINT
PRODUCTION DATE IN FORMAT MM/YY
USE INDELIBLE PAINT

NA TENTO A DIAGONALNY HRANOL POZNACIT
DATUM VYROBY VO FORMATE MM/RR
POUZIT NEZMAZATELNU FARBU

FOR ALL PLASTIC PIN 2.037.146
USE 2.998.269 ANNULAR RING FLATHEAD NAIL Ø3-28,
IN ALTERNATIVE SCREWS 2.206.030

PRE VSETKY PLASTOVE KOLIKY 2.037.146 POUZIT
2.998.269 KONVEXNY PRSTENCOVY KLINEC Ø3-28 S PLOCHOU HLAVOU,
ALTERNATIVA SKRUTKY 2.206.030

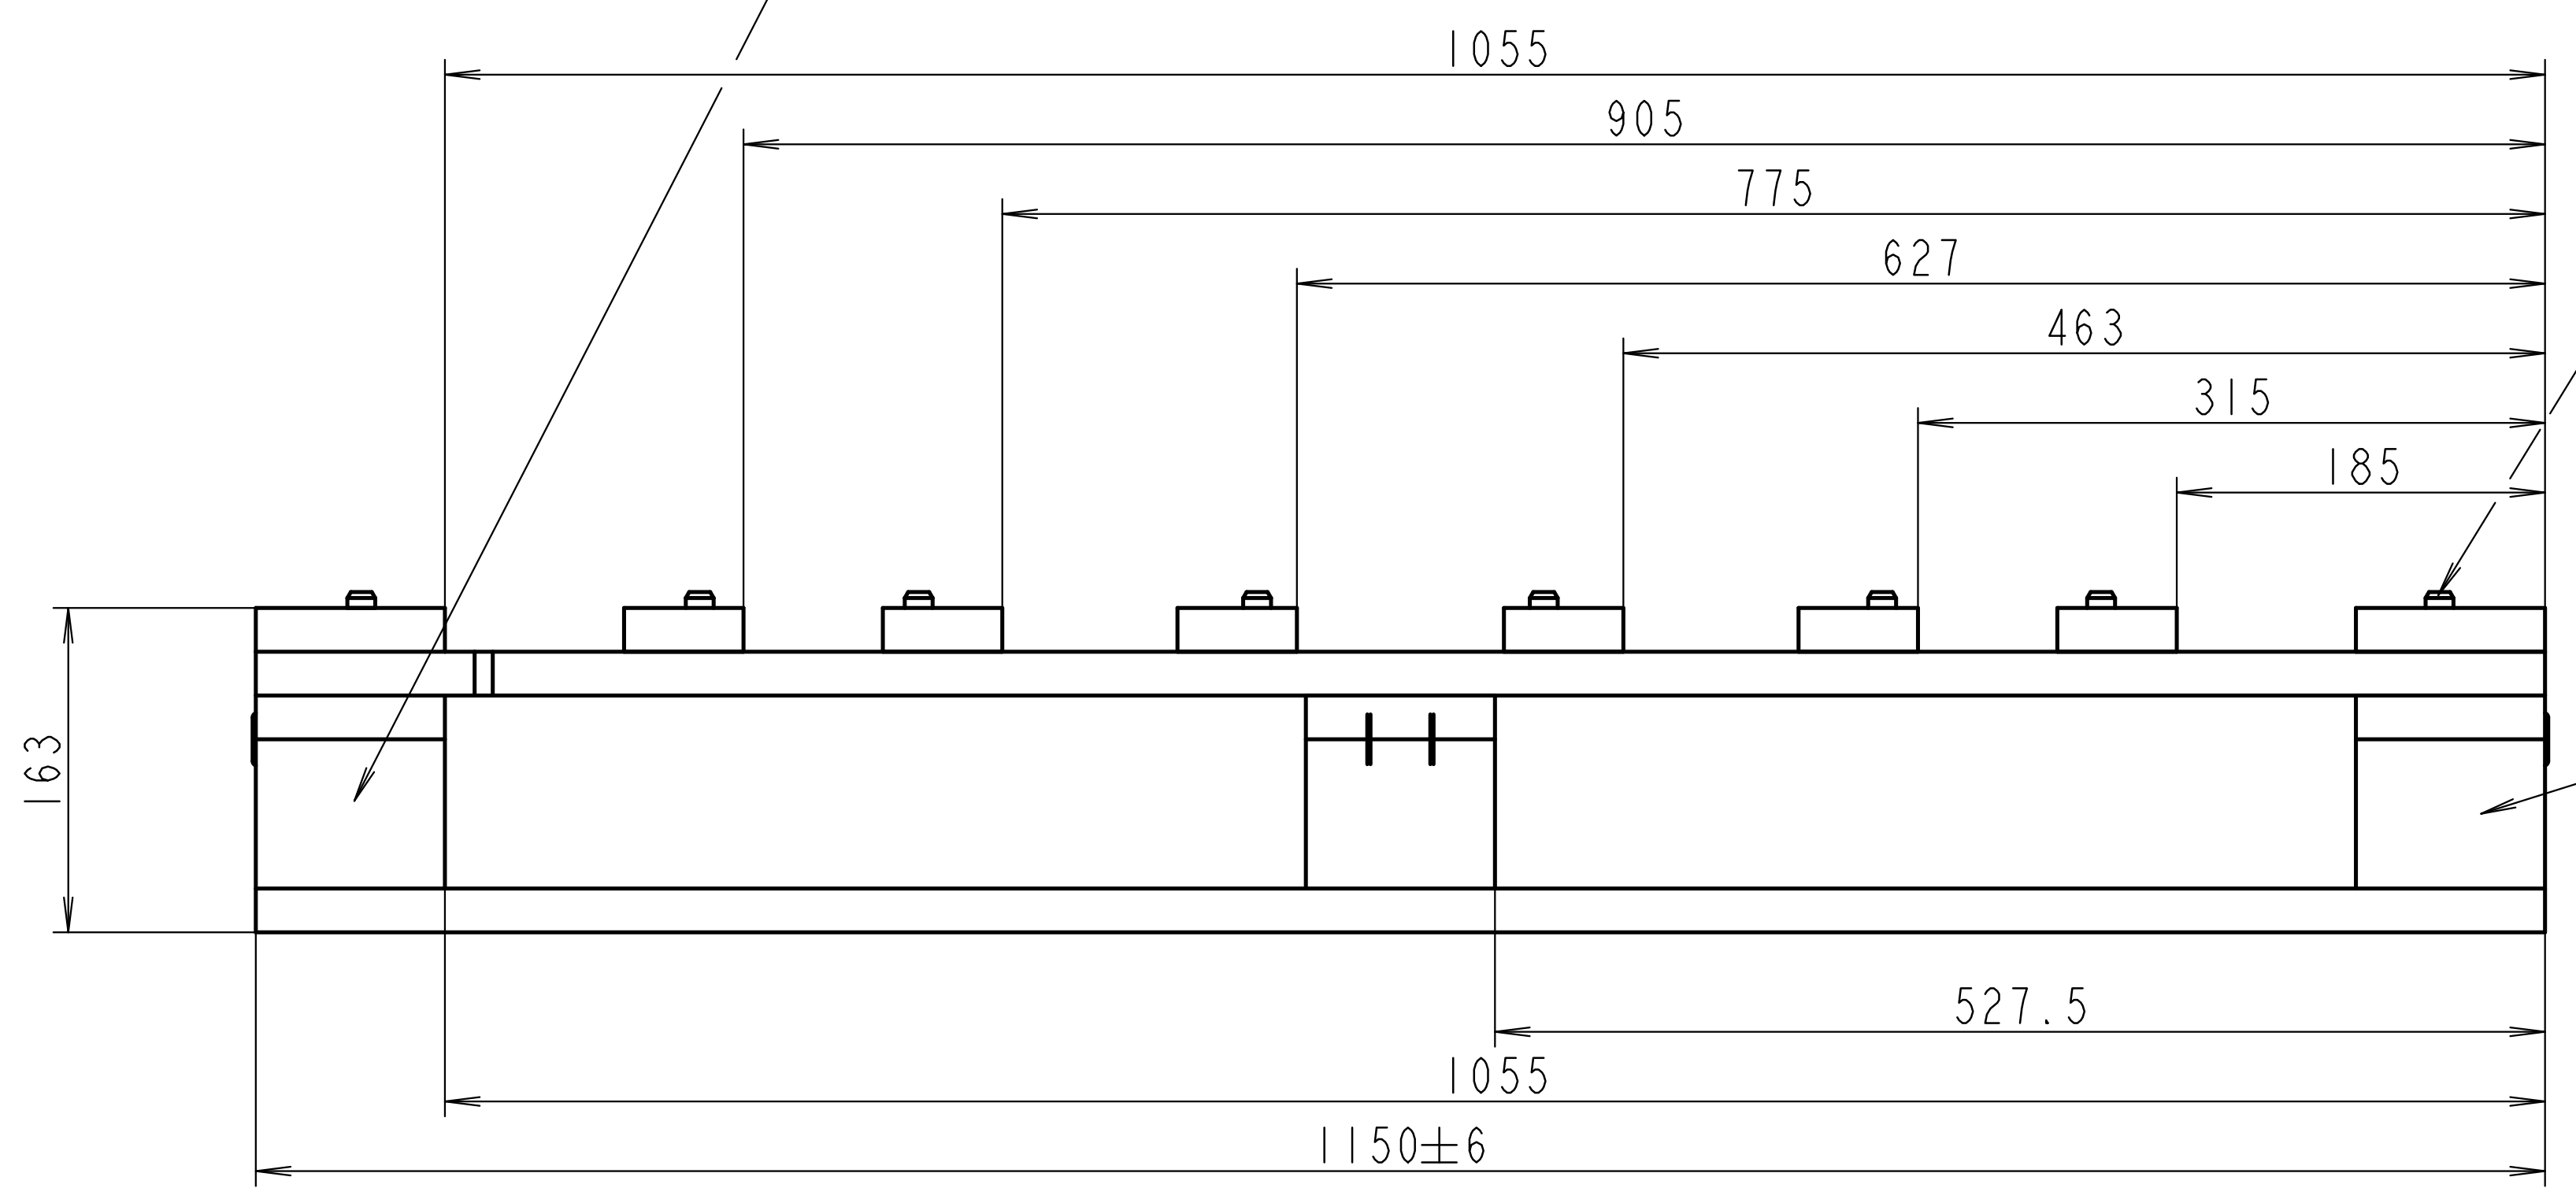

ON THIS AND DIAGONAL BLOCK PRINT
READABLE MARK IPPC
USE HEAT PRINTING

NA TENTO A DIAGONALNY HRANOL
CITATELNE UMIESTNIT ZNACKU IPPC
POUZIT TEPELNU TLAC

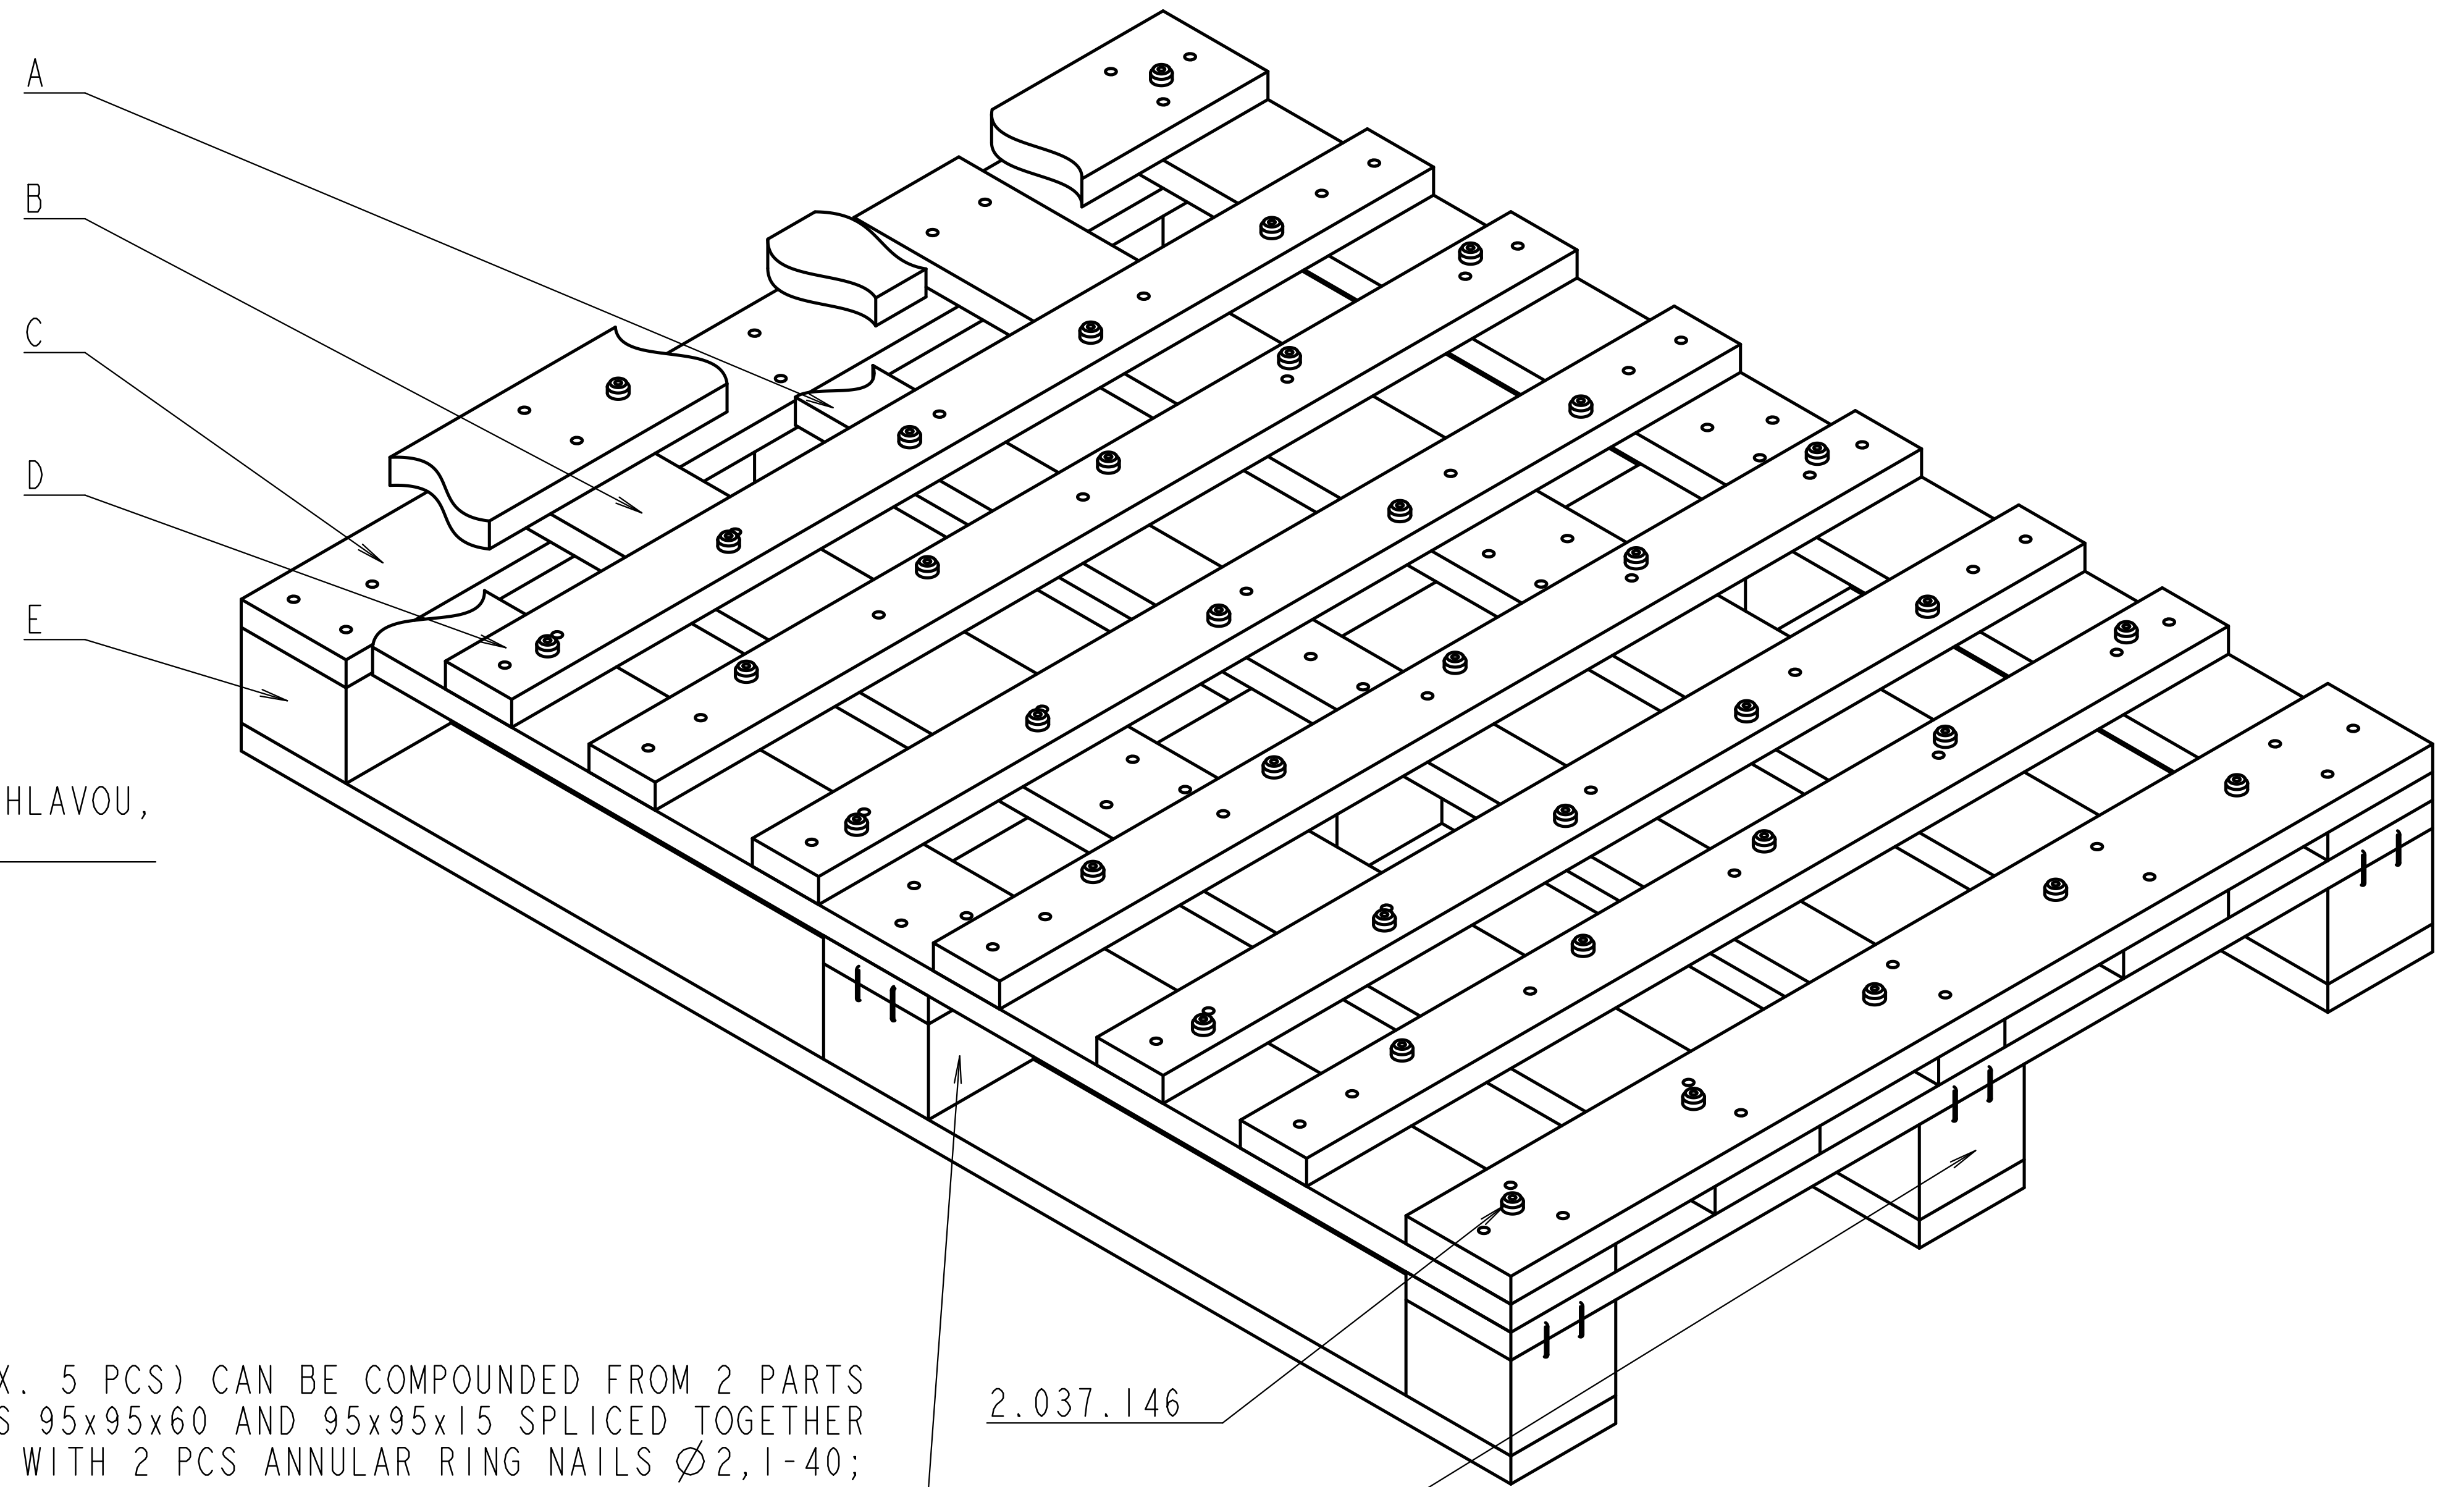

2.037.146

MIDDLE LINE BLOCKS (MAX. 5 PCS) CAN BE COMPOUNDED FROM 2 PARTS
WITH DIMENSIONS 95x95x60 AND 95x95x15 SPLICED TOGETHER
WITH 2 PCS ANNULAR RING NAILS Ø2,1-40;
SMALLER PART MUST BE WITHOUT KNOTS IN NAILED AREA,
DIMENSIONS TOLERANCE OF SPLICED BLOCKS: 95±5x95±5x75±3

HRANOLY STREDNYCH RADOV (MAX. 5 KUSOV) SA MOZU SKLADAT Z 2 CASTI
S ROZMERMY 95x95x60 A 95x95x15 SPOJENYCH
DVOMI KONVEXNYMI PRSTENCOVYMI KLINCAMI Ø2,1-40;
MENSIA CAST HRANOLU MUSI BYT BEZ UZLOV V MIESTE KLINCOVANIA,
TOLERANCIA ROZMEROV SPAJANYCH HRANOLOV: 95±5x95±5x75±3

F-66 PCS OF NAILS
POSITION AS SPECIFIED

F-66 KUSOV KLINCOV
AKO JE OZNACENE NA VYKRESE

G-24 PCS OF NAILS
POSITION AS SPECIFIED

G-24 KUSOV KLINCOV
AKO JE OZNACENE NA VYKRESE

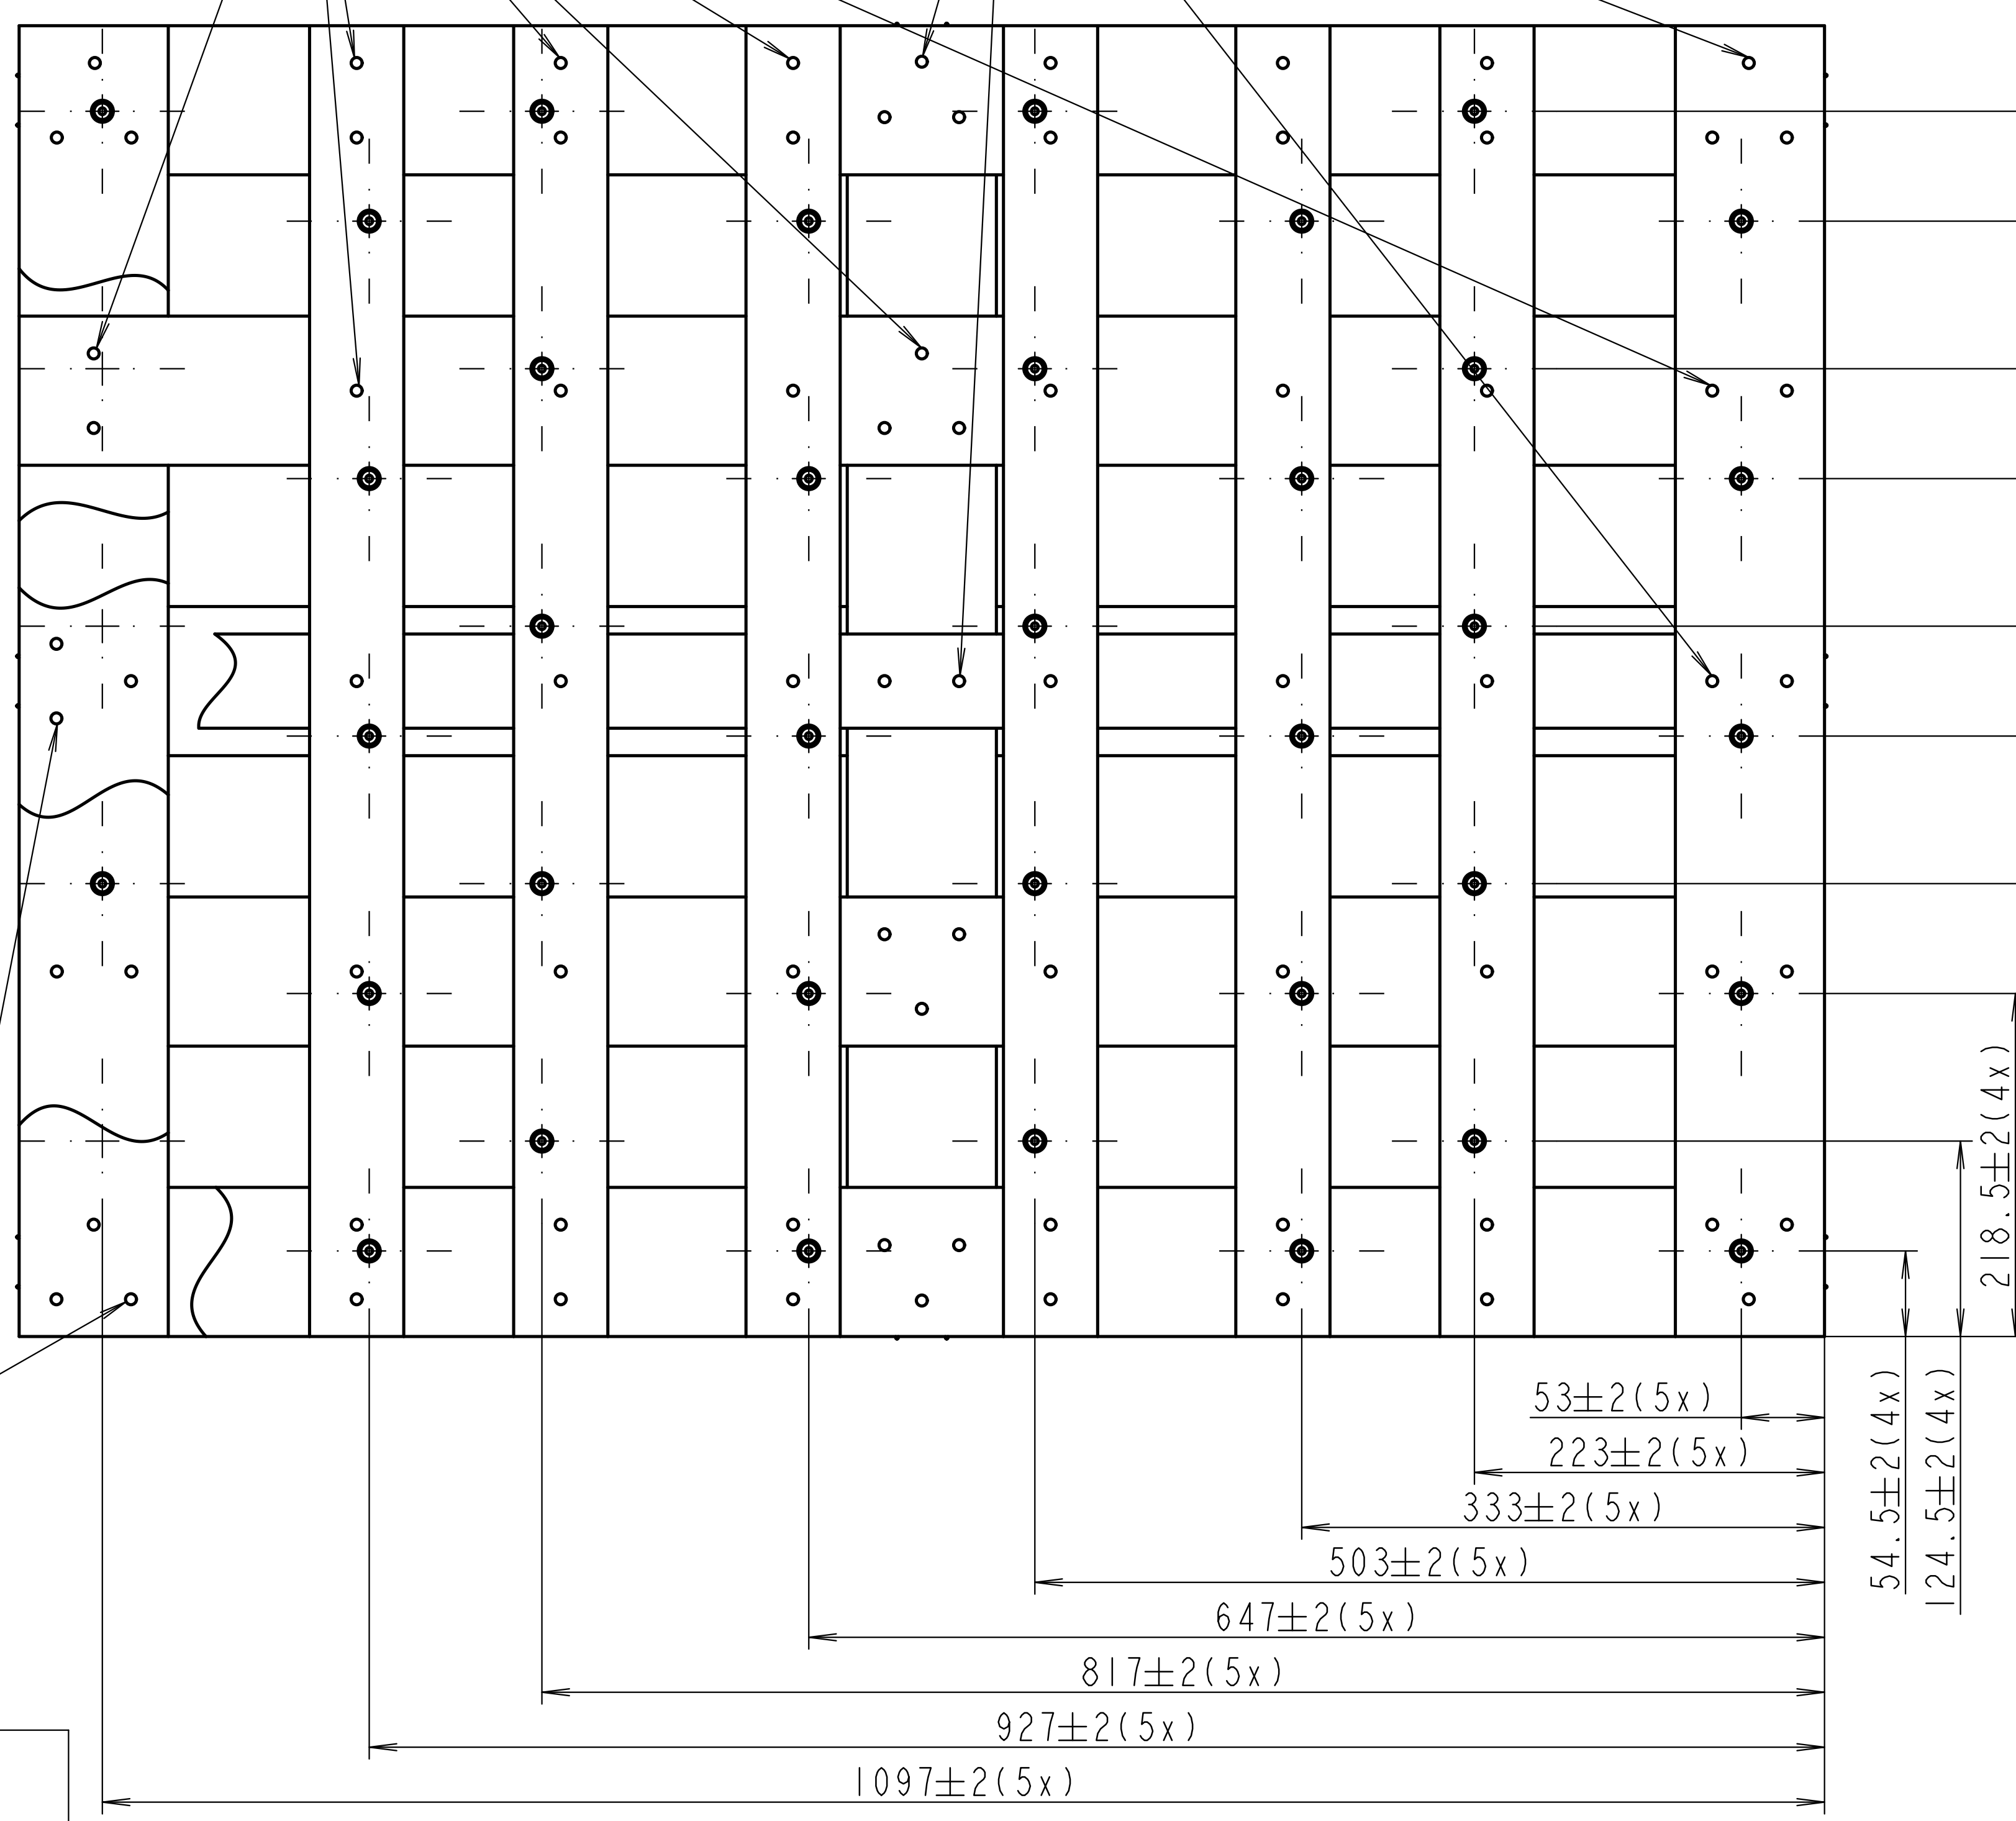

G-27 PCS OF NAILS
POSITION AS SPECIFIED

G-27 KUSOV KLINCOV
AKO JE OZNACENE NA VYKRESE

H
ON MARKED AND ALSO
OPPOSITE SIDES (OPTIONAL)

NA VYZNACENYCH A PROTILAHLYCH
STRANACH (VOLITELNE)

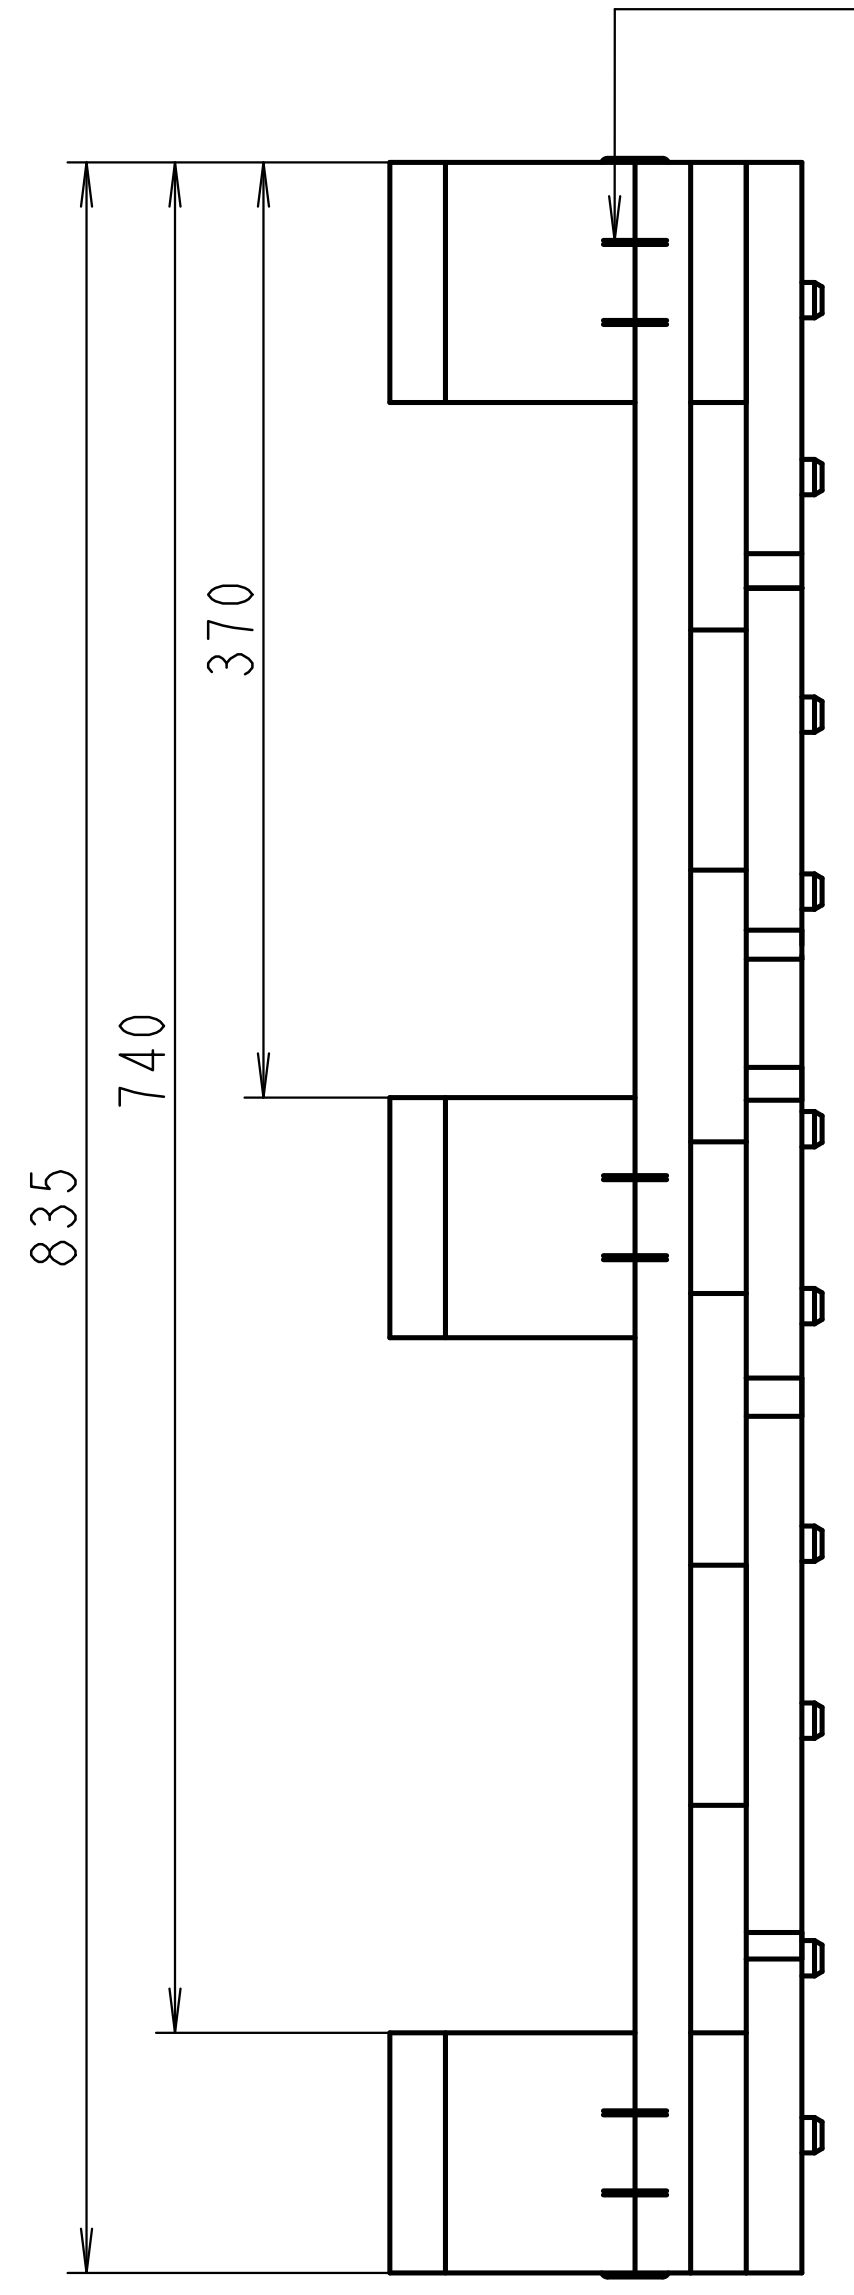

G-27 PCS OF NAILS
POSITION AS SPECIFIED

G-27 KUSOV KLINCOV
AKO JE OZNACENE NA VYKRESE

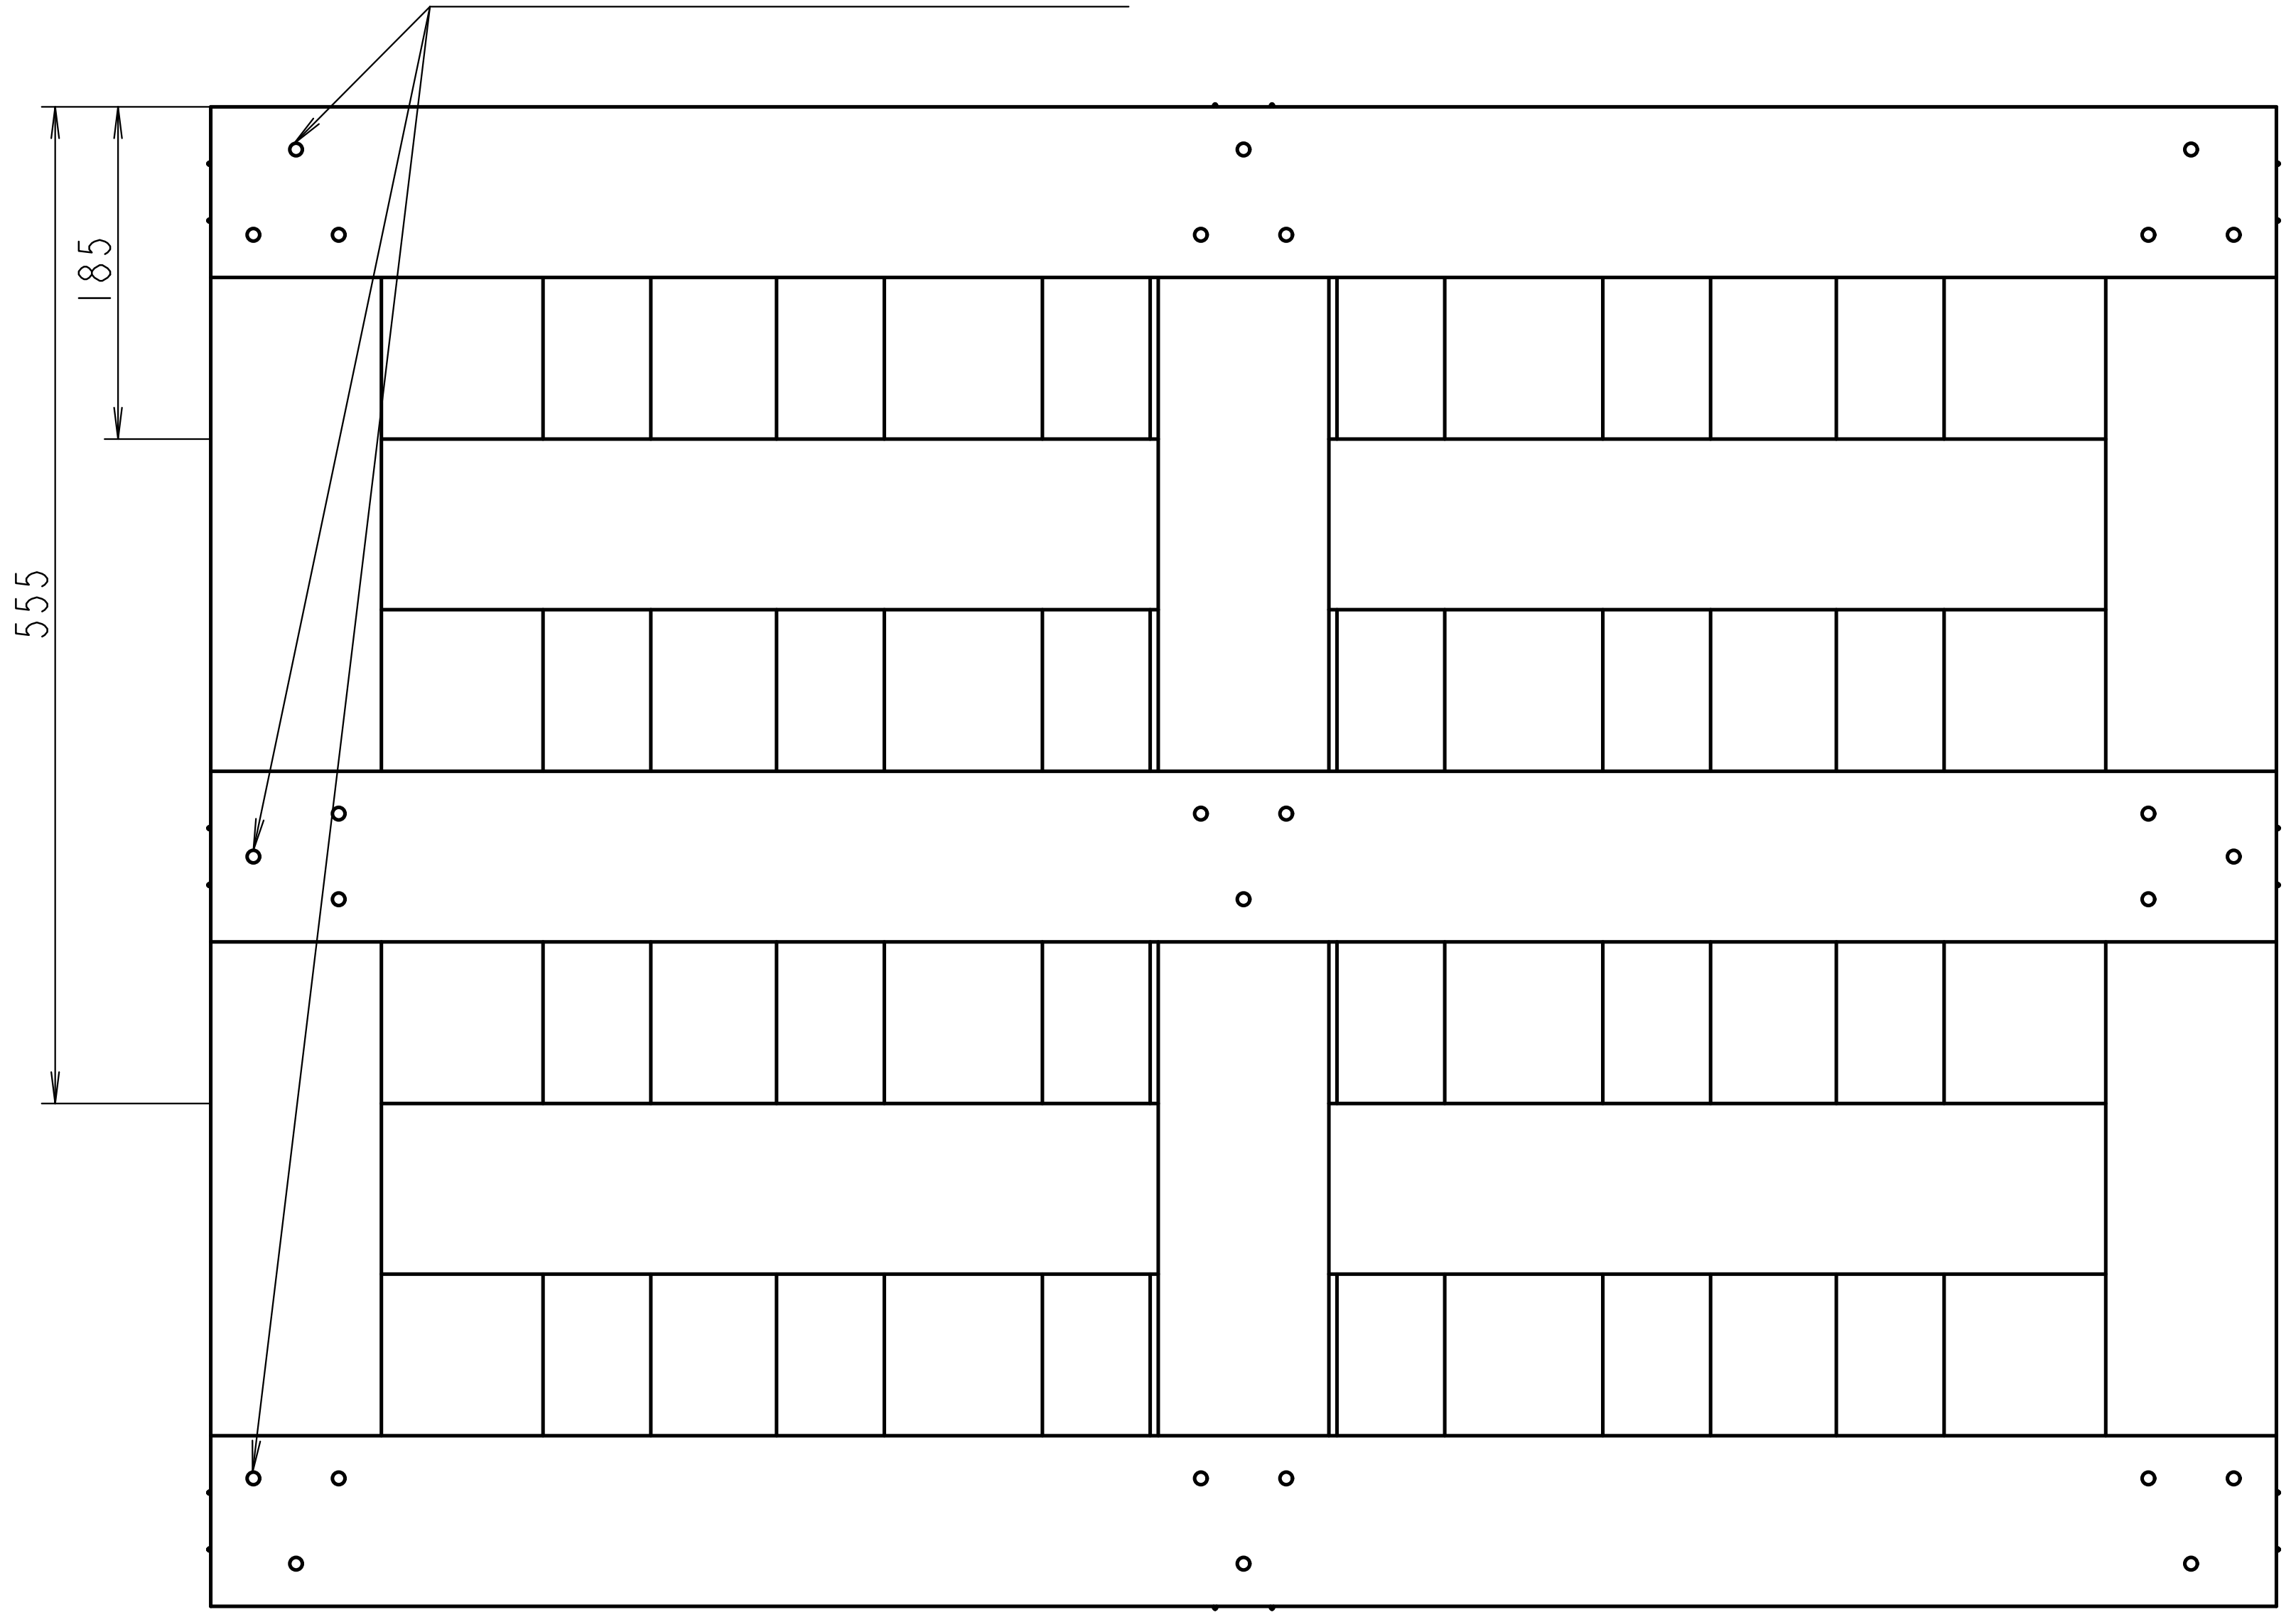

NOTES:

▽1-PALLET MUST BE DRY (MAX. ALLOWED INTERNAL MOISTURE 23%), WITHOUT ALTERATIONS DANGEROUS FOR THE RESISTANCE/STRENGHT
2-THE LARGE USE OF STRIPES NOT ACCORDING TO THE DRAWING OR BARK AND CRACKS ATTENDENCE WILL ALLOW THE REJECTION OF THE ENTIRE BATCH SUPPLIED
3-FIXATION OF TRAVERSE ONLY WITH NAILS APPROVED BY EMBRACO TECHNICAL DEPARTMENT
4-SEE TSS 00PS06, TSS 002100 FOR FURTHER REQUIREMENTS
5-FOR MARK IPPC LOOK AT THE INTERNATIONAL STANDARD ISPM 15
▽6-REQUIREMENTS ABOUT HAZARDOUS SUBSTANCES MUST BE IN ACCORDANCE WITH THE TSS 002420
7-DIMENSIONS AND SPECIFICATIONS SIGNED WITH ▽▼⊕, SEE TSS 002470
8-ASSEMBLY JIG FOR PLASTIC PINS FIXATION MUST BE IN TOLERANCE ±1 mm
9-DIMENSIONS TOLERANCE OF COMPONENTS A-E: ±2 mm

POZNAMKY:

▽1-PALETA MUSI BYT SUCHA (MAX. POVOLENA VNUTORNA VLHKOST 23%), BEZ ODCHYLOK,KTORE SU NEBEZPECNE PRE JEJ ODOLNOST ALEBO PEVNOST
2-VACSI VYSKYT DOSIEK NEZODPOVEDAJUCICH VYKRESU,ALEBO DOSKY S KOROU, PRASKLINAMI SPOSOBIA VYRADENIE CELEJ DODAVKY
3-UPEVNENIE TRAVERZ LEN POMOCOU KLINCOV SCHVALENYCH TECHNICKYM ODDELENIM EMBRACO
4-PRE DALSIE POZIADAVKY POZRI NORMY TSS 00PS06, TSS 002100
5-PRE ZNACKU IPPC POZRI MEDZINARODNY STANDARD ISPM 15
▽6-MUSI ZODPOVEDAT POZIADAVKAM O NEBEZPECNYCH LATKACH PODLA NORMY TSS 002420
7-KOTY A SPECIFIKACIE OZNACENE TAKTO ▽▼⊕, POZRI TSS 002470
8-MONTAZNY PRIPRAVOK PRE FIXACIU PLASTOVYCH KOLIKOV MUSI BYT V TOLERANCII ±1 mm
9-TOLERANCIA ROZMEROV KOMPONENTOV A-E: ±2 mm

ECM	REVISION		LO	BY	APP	DATE
511784	1	ADDED MARKING OF PRODUCTION DATE	F7	PG	RR	02.10.2008
517262	2	CHANGE TOL OF PINS POSITION FROM ±0,5 TO ±1; DELETE NOTES 6 AND 7; CHANGE LENGHT OF NAILS "G" FROM 73 TO 70; CHANGE PIN TO 2037146	--	BP	BP	04.04.2011
517597	3	DELETION OF NOTE ABOUT ASPERA AND SUPPLIER MARK	F3	BP	RR	08.06.2011
33116	4	ADDED MAX MOISTURE 23% IN NOTE 1; NOTE 4:PS-6 CHANGED TO TSS00PS06, ADDED STANDARD TSS 002100; ADDED NOTES 6 AND 7; ADDED HIC MARKS TO THE DRAWING; ADDED "(OPTIONAL)"INTO CLIP NOTE; CHANGED IPPC MARK NOTE: USE HEAT PRINTING WAS USE INDELIBLE PAINT; ANNULAR RING NAIL Ø2,1-35 WAS CONVEX NAIL Ø2,1-35; ANNULAR RING NAIL Ø2,5-70 WAS CONVEX NAIL Ø2,5-70;	NOTE F5 H9 TABLE	SS	MG	04.06.2014
41028	5	ADDED NOTE TO COMPONENTS D - MIDDLE LINE BLOCKS; ADDED ALTERNATIVE FOR PLASTIC PIN FIXATION; CHANGED PLASTIC PINS DIMENSIONS TOLERANCE FROM ±1 TO ±2; CHANGED GENERAL TOLERANCE FROM ±2 TO ±4; CHANGED DIMENSION FROM (835) TO 835; CHANGED DIMENSION FROM (1150) TO 1150±6; ADDED NOTES 8 AND 9; CHANGED POSITION OF IPPC MARK; ADDED POSITION OF PRODUCTION DATE; CORRECTED NOTE - FROM F24 TO F66;	F5 G7 C7 B8 TAB C6 F9 NOTES F7 H10 E11	KK	MG	27.01.2016

MATERIAL : ABETE SPRUCE SMREK	**embraco**		GEN. TOL. : ±4 ANG. TOL. : -- SCALE : 1:5
CODE :	NAME BASE PALETTE FOR NEW WOODEN PACKAGING MIDI ZAKLADNA PALETA PRE NOVE DREVENE BALENIE MIDI		REPLACE 1.754.062 REV.2
DRAWN :Pavol BEZILA	29/10/2007		No. 1.754.062 --
APP.: Dalla VECCHIA	29/10/2007		
ECM : 510636			

THIS MATERIAL IS CONFIDENTIAL AND PROPRIETARY TO EMBRACO EUROPE AND MAY NOT BE REPRODUCED, DISCLOSED, DISTRIBUTED OR USED WITHOUT WRITTEN PERMISSION.