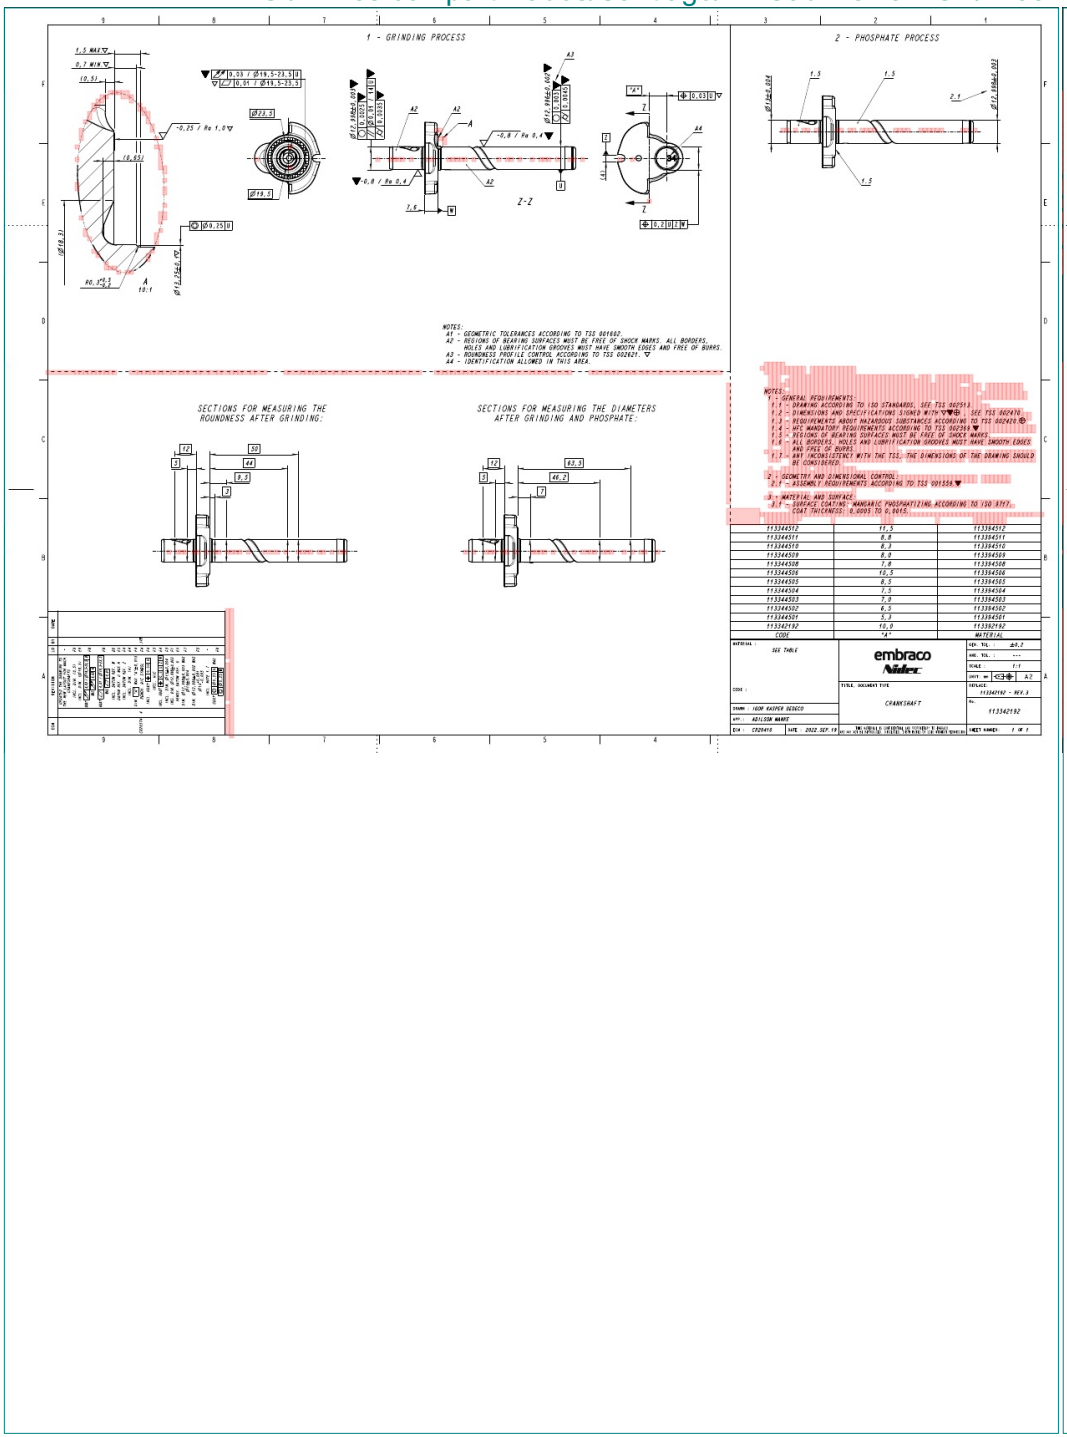
1 - GRINDING PROCESS
2 - PHOSPHATE PROCESS
Z-Z
SECTIONS FOR MEASURING THE ROUNDNESS AFTER GRINDING:
SECTIONS FOR MEASURING THE DIAMETERS AFTER GRINDING AND PHOSPHATE:
NOTES:
A1 - GEOMETRIC TOLERANCES ACCORDING TO TSS 001682.
A2 - REGIONS OF BEARING SURFACES MUST BE FREE OF SHOCK MARKS. ALL BORDERS, HOLES AND LUBRIFICATION GROOVES MUST HAVE SMOOTH EDGES AND FREE OF BURRS.
A3 - ROUNDNESS PROFILE CONTROL ACCORDING TO TSS 002621.
A4 - IDENTIFICATION ALLOWED IN THIS AREA.
NOTES:
1 - GENERAL REQUIREMENTS:
1.1 - DRAWING ACCORDING TO ISO STANDARDS, SEE TSS 000513.
1.2 - DIMENSIONS AND SPECIFICATIONS SIGNED WITH ▽▼Ⓜ - SEE TSS 000470.
1.3 - REQUIREMENTS ABOUT HAZARDOUS SUBSTANCES ACCORDING TO TSS 002420.Ⓜ
1.4 - WCC MANDATORY REQUIREMENTS ACCORDING TO TSS 002369.▼
1.5 - REGIONS OF BEARING SURFACES MUST BE FREE OF SHOCK MARKS.
1.6 - ALL BORDERS, HOLES AND LUBRIFICATION GROOVES MUST HAVE SMOOTH EDGES AND FREE OF BURRS.
1.7 - ANY INCONSISTENCY WITH THE TSS, THE DIMENSIONS OF THE DRAWING SHOULD BE CONSIDERED.
2 - GEOMETRY AND DIMENSIONAL CONTROL:
2.1 - ASSEMBLY REQUIREMENTS ACCORDING TO TSS 001558.▼
3 - MATERIAL AND SURFACE:
3.1 - SURFACE COATING: MANGANIC PHOSPHATIZING ACCORDING TO ISO 9717.
COAT THICKNESS: 0,0005 TO 0,0015.
CODE | MATERIAL
113344512 | 11,5 | 113394512
113344511 | 8,8 | 113394511
113344510 | 8,3 | 113394510
113344509 | 8,0 | 113394509
113344508 | 7,8 | 113394508
113344506 | 10,5 | 113394506
113344505 | 8,5 | 113394565
113344504 | 7,5 | 113394564
113344503 | 7,0 | 113394563
113344502 | 6,3 | 113394562
113344501 | 5,3 | 113394561
113342192 | 10,0 | 113392192
CODE | MATERIAL
'A'
MATERIAL : SEE TABLE
CODE :
embraco Nidec
TITLE: DOCUMENT TYPE
CRANKSHAFT
113342192 - REV.3
113342192
SCALE: 1:1
SHEET 1 OF 1

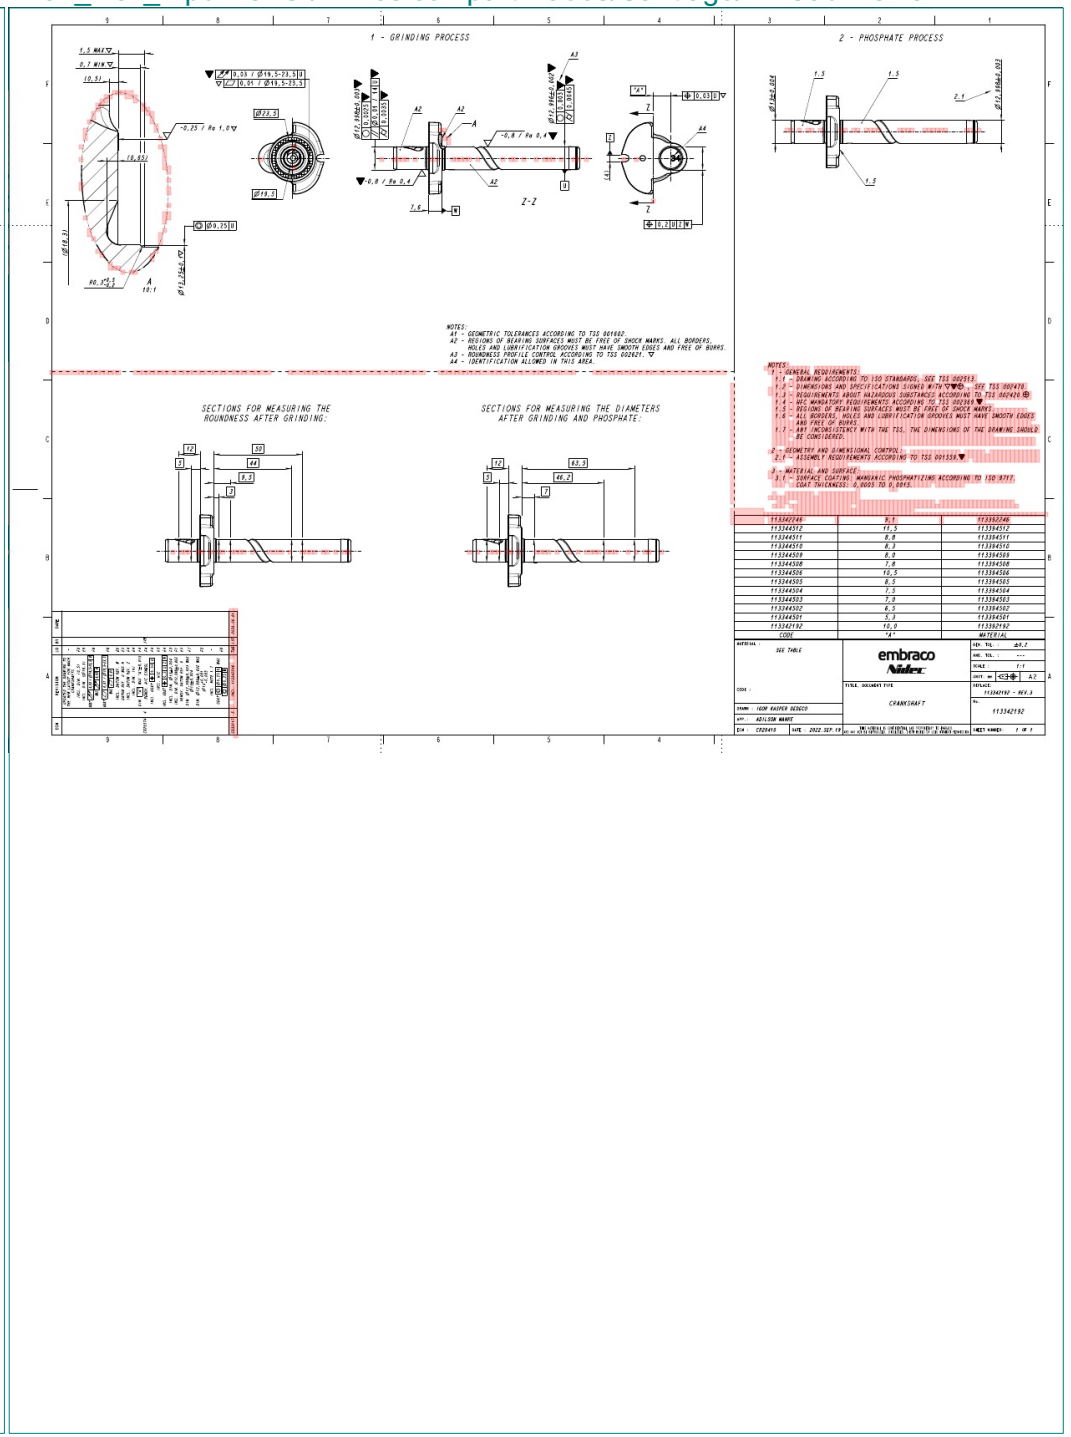
1 - GRINDING PROCESS
2 - PHOSPHATE PROCESS
Z-Z
SECTIONS FOR MEASURING THE ROUNDNESS AFTER GRINDING:
SECTIONS FOR MEASURING THE DIAMETERS AFTER GRINDING AND PHOSPHATE:
NOTES:
A1 - GEOMETRIC TOLERANCES ACCORDING TO TSS 001682.
A2 - REGIONS OF BEARING SURFACES MUST BE FREE OF SHOCK MARKS. ALL BORDERS, HOLES AND LUBRIFICATION GROOVES MUST HAVE SMOOTH EDGES AND FREE OF BURRS.
A3 - ROUNDNESS PROFILE CONTROL ACCORDING TO TSS 002621.
A4 - IDENTIFICATION ALLOWED IN THIS AREA.
NOTES:
1 - GENERAL REQUIREMENTS:
1.1 - DRAWING ACCORDING TO ISO STANDARDS, SEE TSS 000513.
1.2 - DIMENSIONS AND SPECIFICATIONS SIGNED WITH ▽▼Ⓜ - SEE TSS 000470.
1.3 - REQUIREMENTS ABOUT HAZARDOUS SUBSTANCES ACCORDING TO TSS 002420.Ⓜ
1.4 - WCC MANDATORY REQUIREMENTS ACCORDING TO TSS 002369.▼
1.5 - REGIONS OF BEARING SURFACES MUST BE FREE OF SHOCK MARKS.
1.6 - ALL BORDERS, HOLES AND LUBRIFICATION GROOVES MUST HAVE SMOOTH EDGES AND FREE OF BURRS.
1.7 - ANY INCONSISTENCY WITH THE TSS, THE DIMENSIONS OF THE DRAWING SHOULD BE CONSIDERED.
2 - GEOMETRY AND DIMENSIONAL CONTROL:
2.1 - ASSEMBLY REQUIREMENTS ACCORDING TO TSS 001558.▼
3 - MATERIAL AND SURFACE:
3.1 - SURFACE COATING: MANGANIC PHOSPHATIZING ACCORDING TO ISO 9717.
COAT THICKNESS: 0,0005 TO 0,0015.
113342246 | 9,1 | 113392246
113344512 | 11,5 | 113394512
113344511 | 8,8 | 113394511
113344510 | 8,3 | 113394510
113344509 | 8,0 | 113394509
113344508 | 7,8 | 113394508
113344506 | 10,5 | 113394506
113344505 | 8,5 | 113394565
113344504 | 7,5 | 113394564
113344503 | 7,0 | 113394563
113344502 | 6,3 | 113394562
113344501 | 5,3 | 113394561
113342192 | 10,0 | 113392192
CODE | MATERIAL
'A'
MATERIAL : SEE TABLE
CODE :
embraco Nidec
TITLE: DOCUMENT TYPE
CRANKSHAFT
113342192 - REV.3
113342192
SCALE: 1:1
SHEET 1 OF 1