


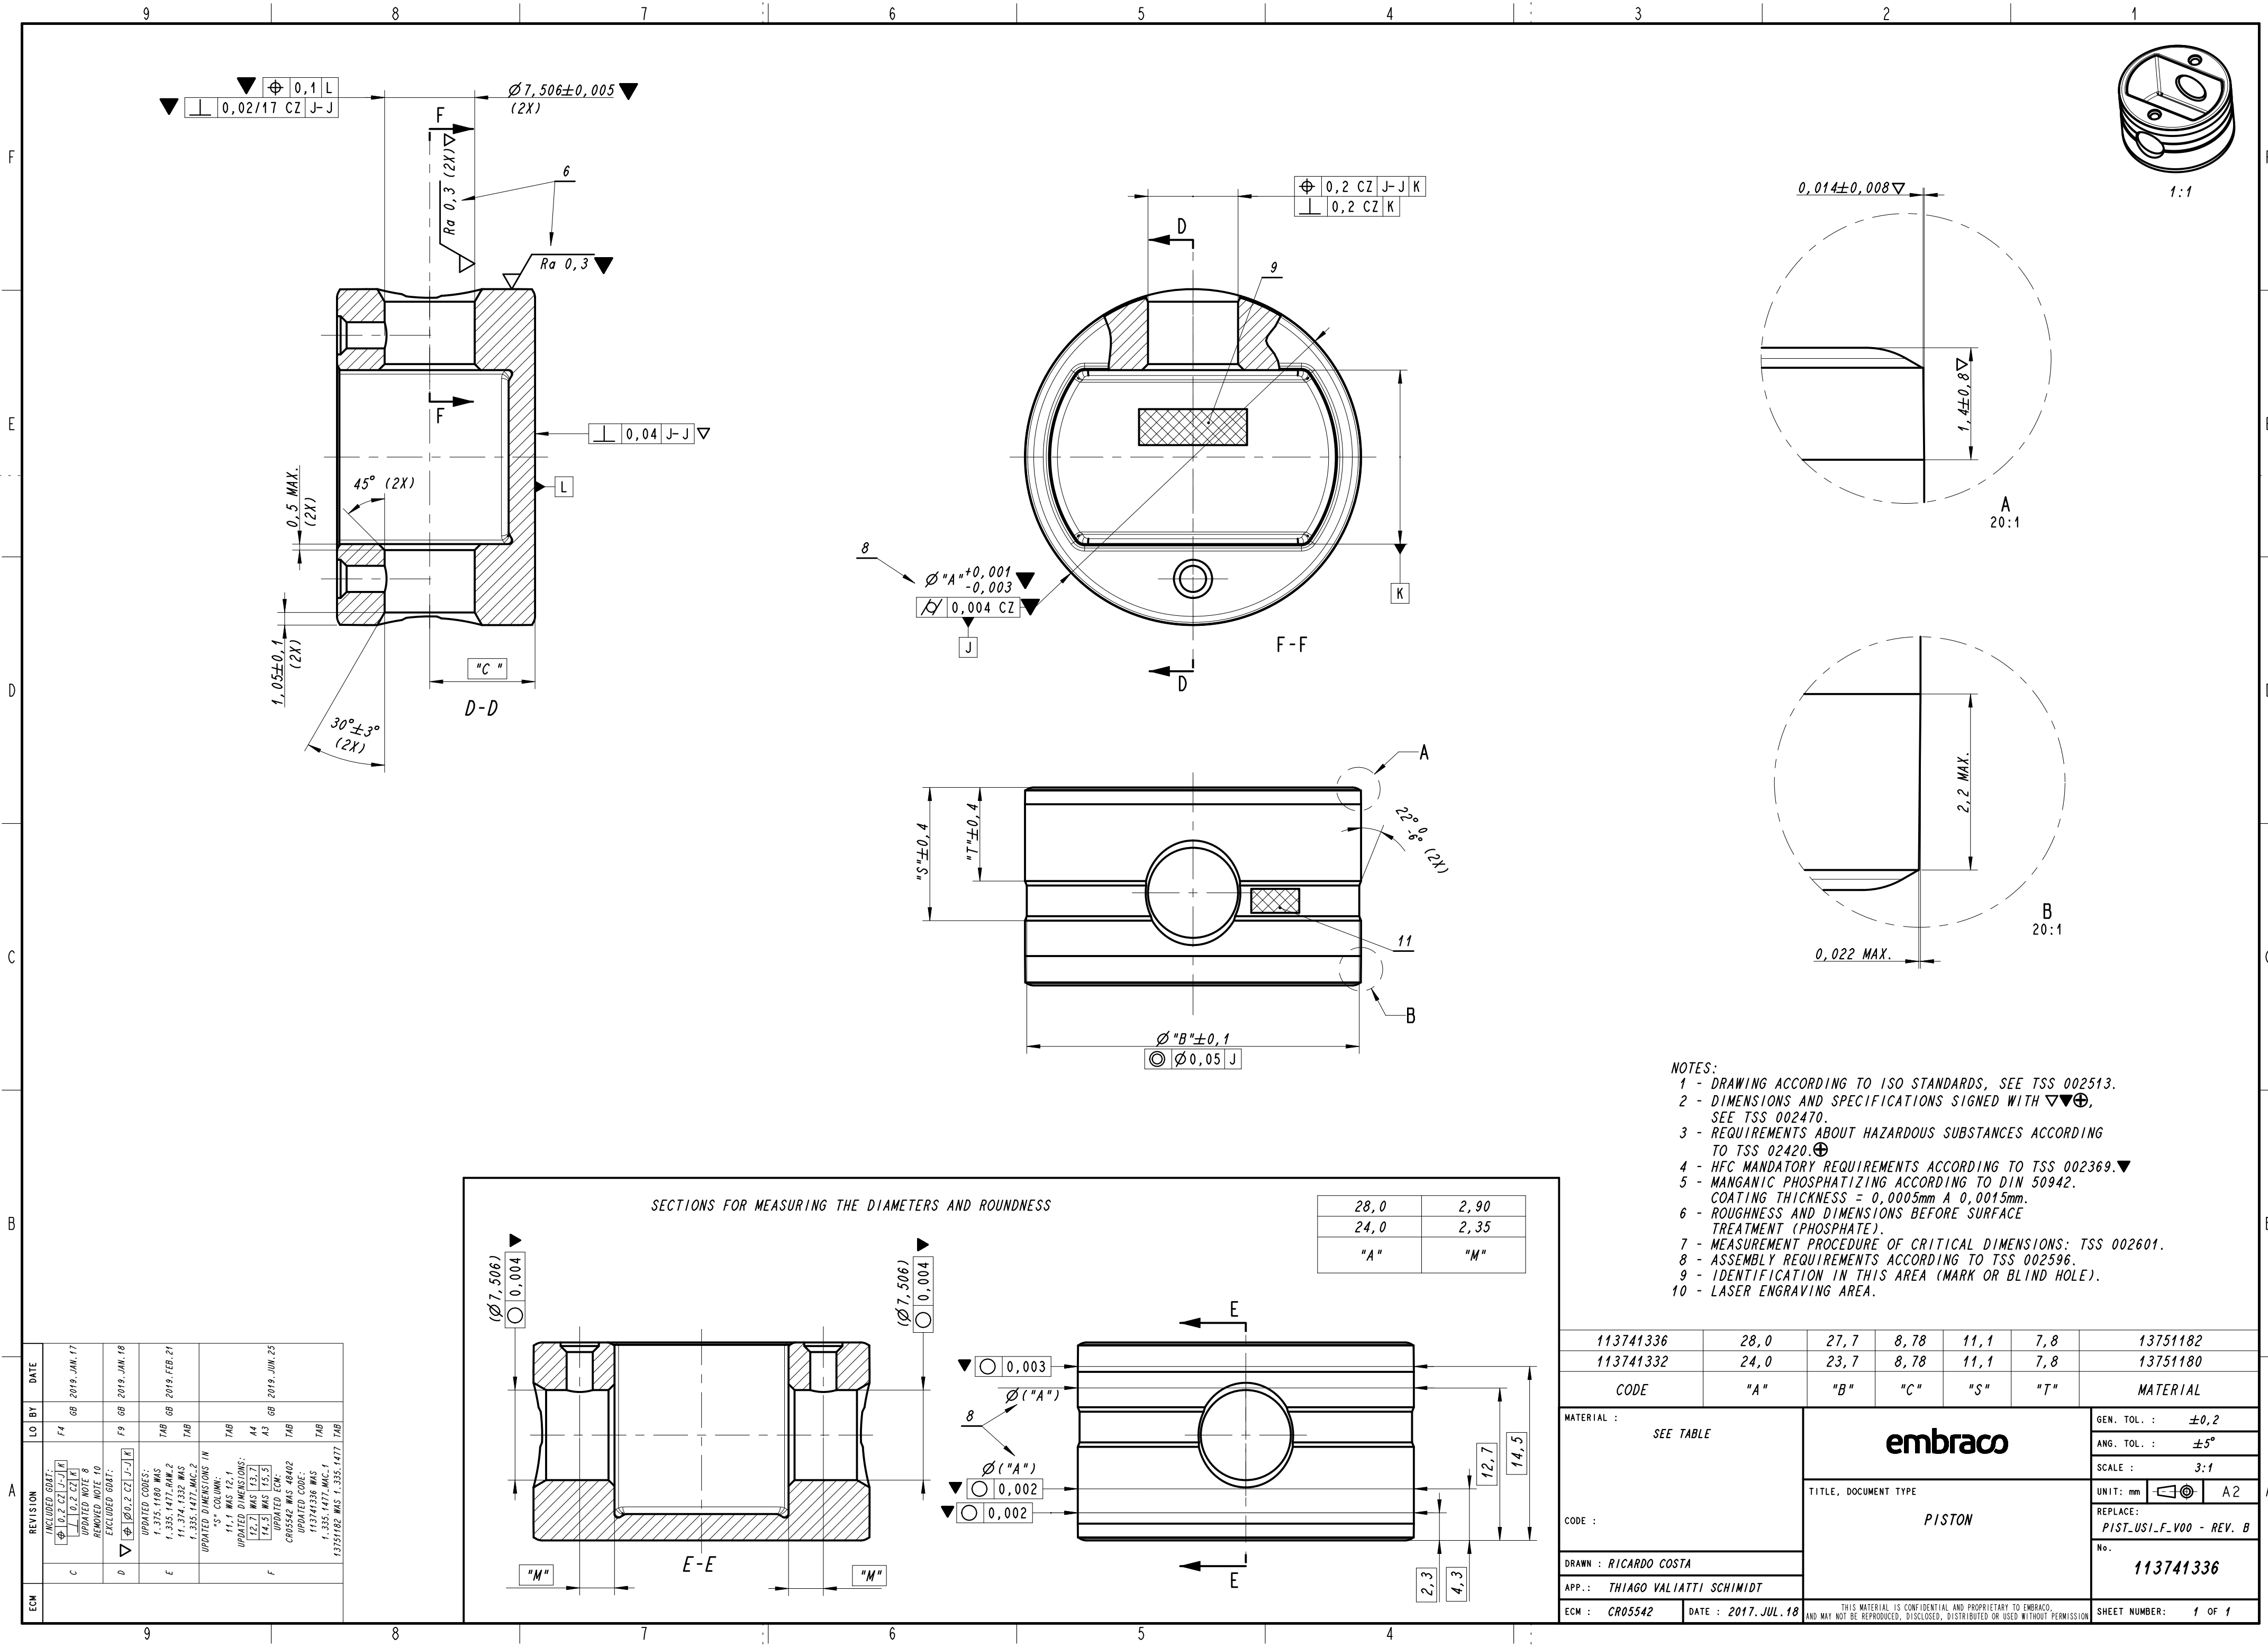

NOTES:

- 1 - DRAWING ACCORDING TO ISO STANDARDS, SEE TSS 002513.
- 2 - DIMENSIONS AND SPECIFICATIONS SIGNED WITH $\nabla \nabla \oplus$, SEE TSS 002470.
- 3 - REQUIREMENTS ABOUT HAZARDOUS SUBSTANCES ACCORDING TO TSS 02420. $\oplus$
- 4 - HFC MANDATORY REQUIREMENTS ACCORDING TO TSS 002369. ∇
- 5 - MANGANIC PHOSPHATIZING ACCORDING TO DIN 50942. COATING THICKNESS = 0,0005mm A 0,0015mm.
- 6 - ROUGHNESS AND DIMENSIONS BEFORE SURFACE TREATMENT (PHOSPHATE).
- 7 - MEASUREMENT PROCEDURE OF CRITICAL DIMENSIONS: TSS 002601.
- 8 - ASSEMBLY REQUIREMENTS ACCORDING TO TSS 002596.
- 9 - IDENTIFICATION IN THIS AREA (MARK OR BLIND HOLE).
- 10 - LASER ENGRAVING AREA.

113741336	28,0	27,7	8,78	11,1	7,8	13751182
113741332	24,0	23,7	8,78	11,1	7,8	13751180
CODE	"A"	"B"	"C"	"S"	"T"	MATERIAL
MATERIAL : SEE TABLE		embraco				GEN. TOL. : ±0,2
						ANG. TOL. : ±5°
						SCALE : 3:1
CODE :		TITLE, DOCUMENT TYPE PISTON				UNIT: mm  A2
						REPLACE: PIST-US1-F-V00 - REV. B
						No. 113741336
DRAWN : RICARDO COSTA						SHEET NUMBER: 1 OF 1
APP. : THIAGO VALIATTI SCHIMDT						
ECM : CRO5542	DATE : 2017.JUL.18	THIS MATERIAL IS CONFIDENTIAL AND PROPRIETARY TO EMBRACO, AND MAY NOT BE REPRODUCED, DISCLOSED, DISTRIBUTED OR USED WITHOUT PERMISSION				