


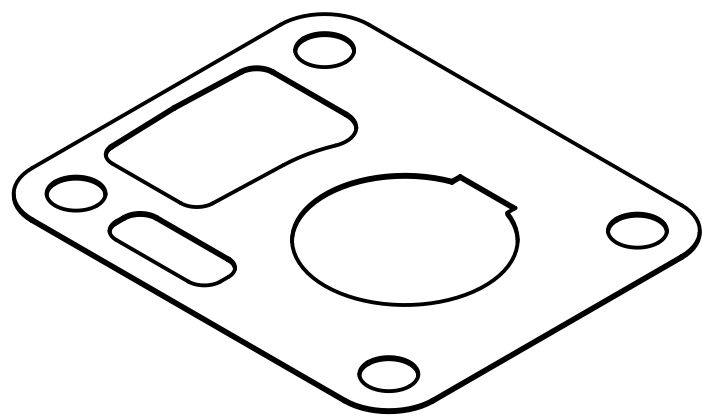

13358800 / 8990 2051110	26, 9	13, 85	13 - 20	RED	BROWN
			1 - 12	BLACK	PURPLE
13358605 / 8796 2051109	24, 9	12, 85	13 - 20	RED	ORANGE
			1 - 12	BLACK	BEIGE (MX) PINK (MX ALT.) PINK (BR)
13358400 / 8591 2051108	23, 4	12, 10	13 - 20	RED	
			1 - 12	BLACK	
13358206 / 8397 2051107	21, 9	11, 35	13 - 20	RED	
			1 - 12	BLACK	
13358001 / 8192 2051106	19, 9	10, 35	13 - 20	RED	
			1 - 12	BLACK	
CODE	"X"	"E"	GROUP	COLOR	COLOR BRAZIL/MX

NOTES:

- 1 - DRAWING ACCORDING TO ISO STANDARDS, SEE TSS 002513.
- 2 - DIMENSIONS AND SPECIFICATIONS SIGNED WITH $\nabla \nabla \oplus$, SEE TSS 002470.
- 3 - REQUIREMENTS ABOUT HAZARDOUS SUBSTANCES ACCORDING TO TSS 002420. $\oplus$
- 4 - HFC MANDATORY REQUIREMENTS ACCORDING TO TSS 002369. ∇
- 5 - THICKNESS CLASSIFICATION: ACCORDING TO THE TABLE.
- 6 - IDENTIFY THE THICKNESS CLASS IN THE OPPOSITE SIDE TO THE DRAWING REPRESENTATION. FORMAT: "X-THICKNESS CLASS", FOR EXAMPLE: "19, 9-13°"
LETTERING HEIGHT: 2,5 , COLOR: WHITE OR BLACK.
(ONLY FOR THE CHINA AND AUSTRIA PLANT).
- 7 - VARIATION IS ADMITTED OF ± 3 MICROMETERS IN THE LIMITS OF SPECIFICATION OF THE THICKNESS BETWEEN GASKET GROUPS.