


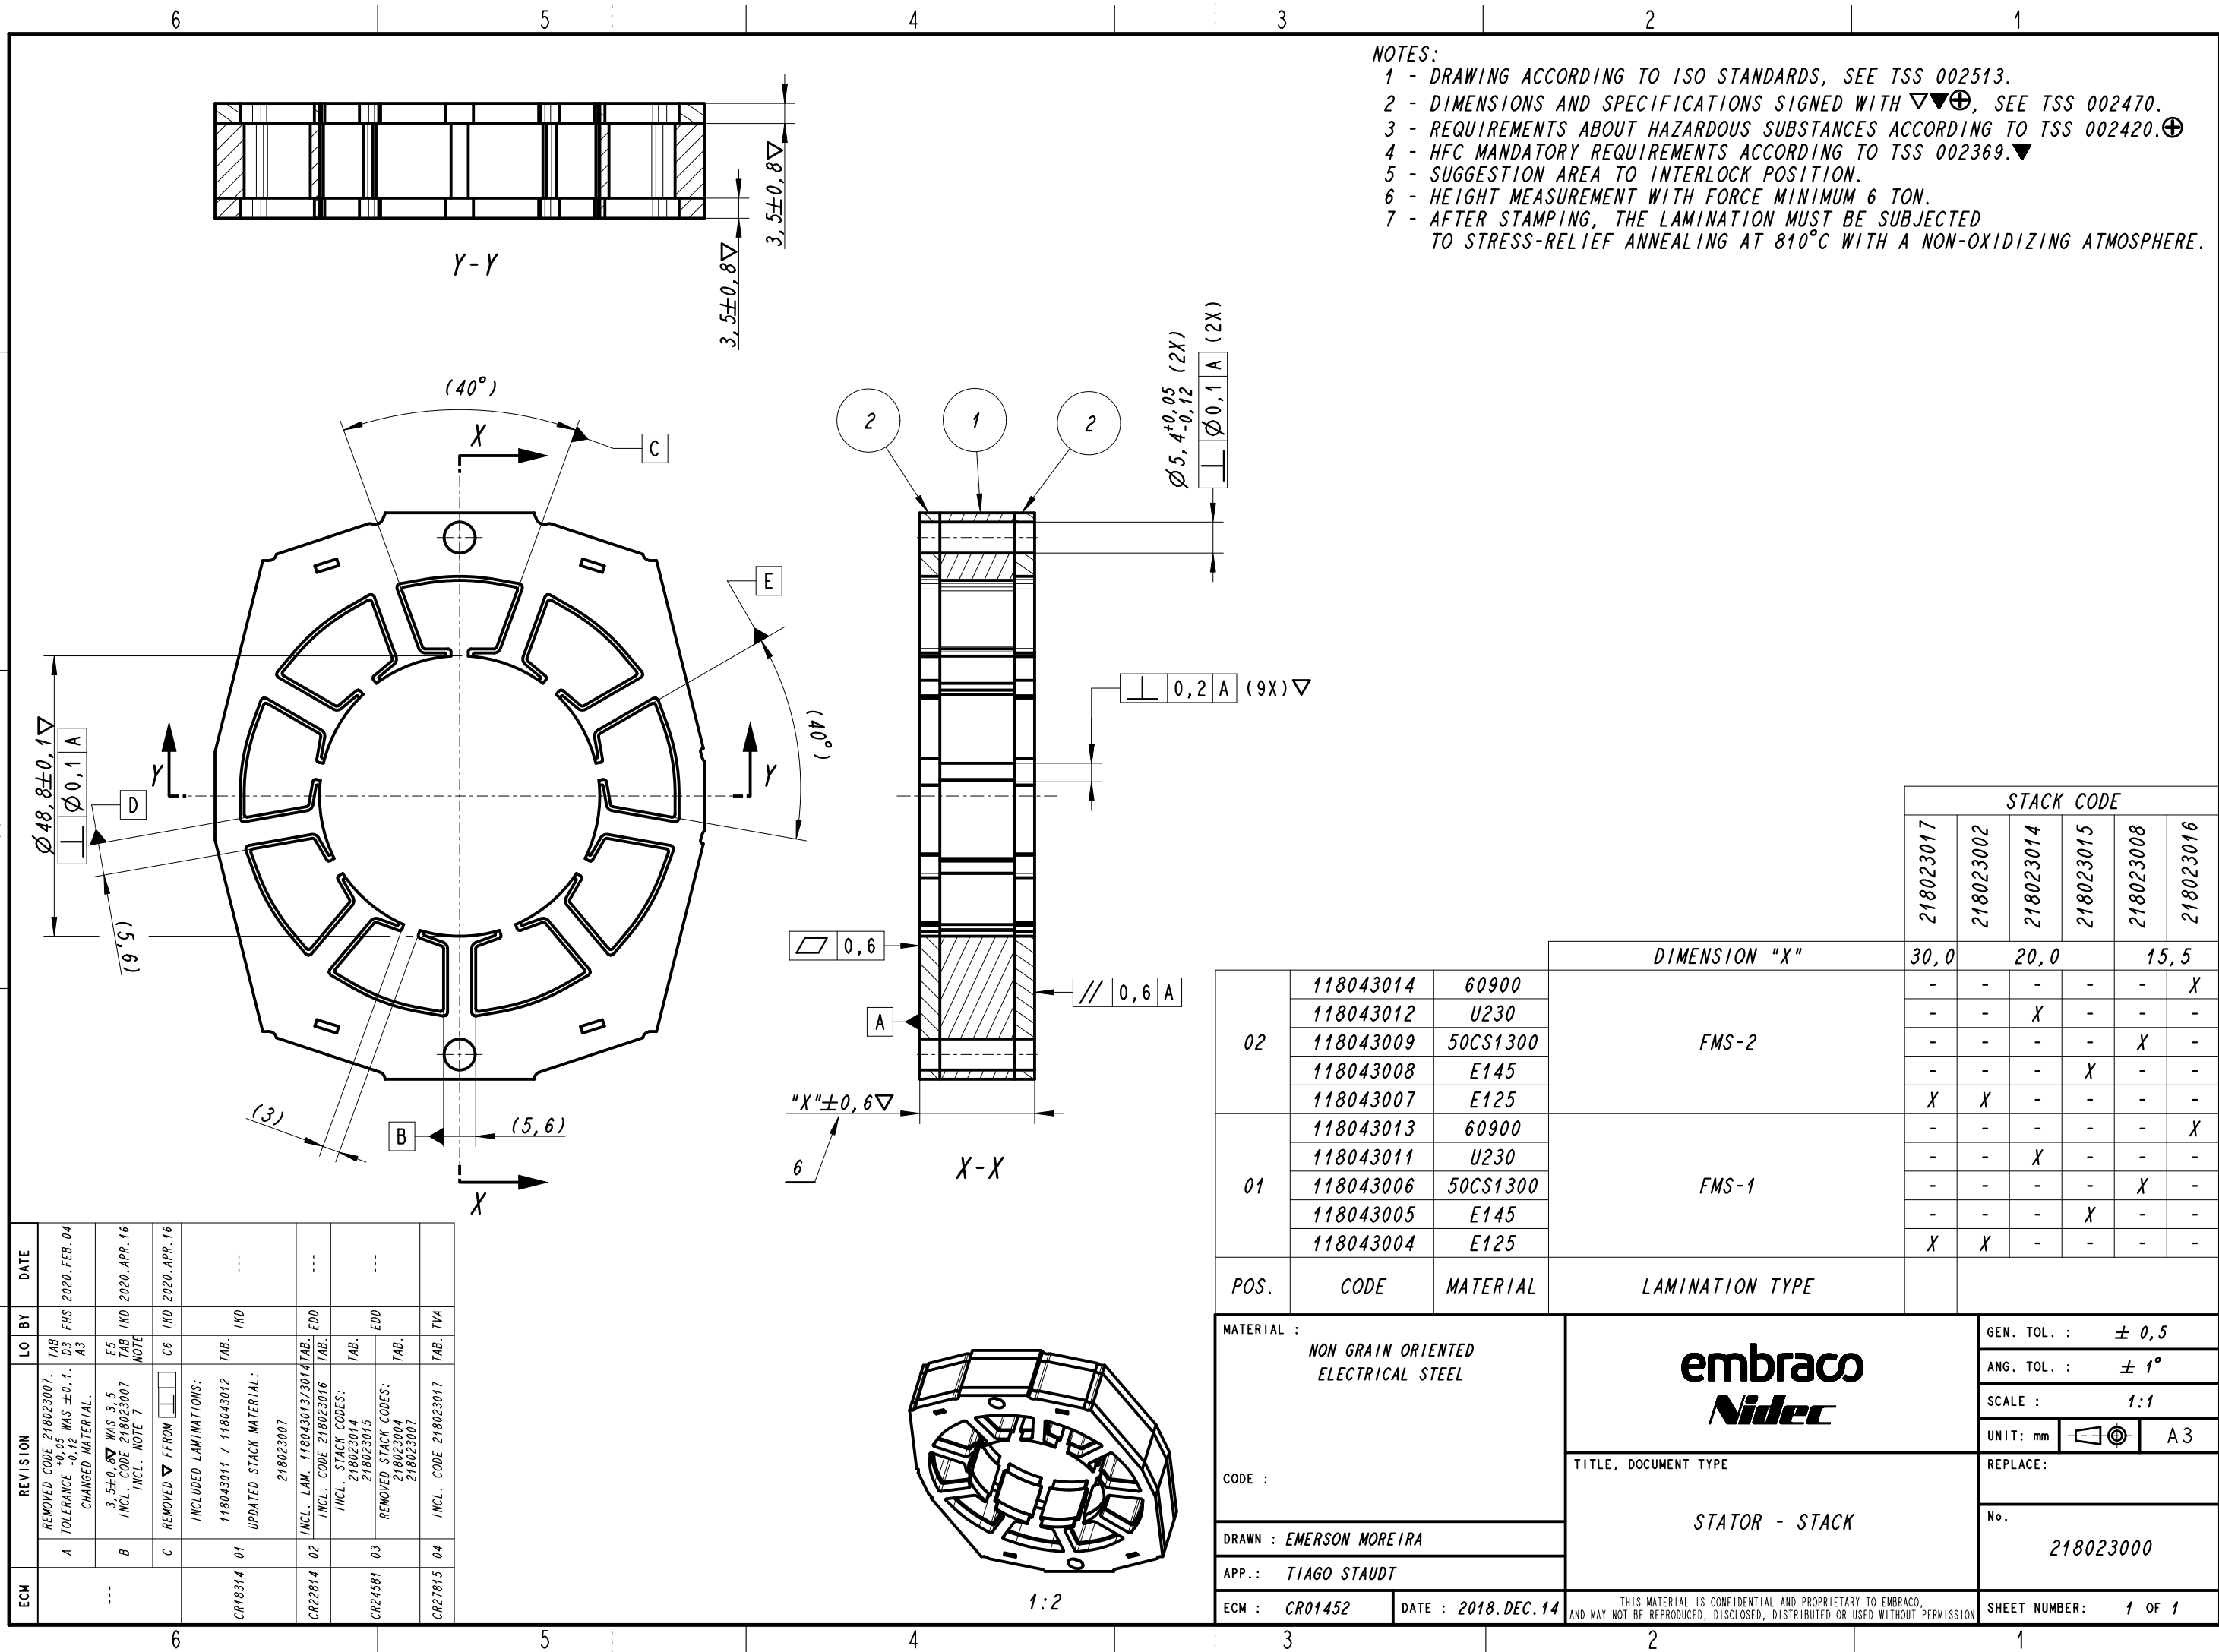

NOTES:

- 1 - DRAWING ACCORDING TO ISO STANDARDS, SEE TSS 002513.
2 - DIMENSIONS AND SPECIFICATIONS SIGNED WITH $\nabla\nabla\oplus$, SEE TSS 002470.
3 - REQUIREMENTS ABOUT HAZARDOUS SUBSTANCES ACCORDING TO TSS 002420. $\oplus$
4 - HFC MANDATORY REQUIREMENTS ACCORDING TO TSS 002369. ∇
5 - SUGGESTION AREA TO INTERLOCK POSITION.
6 - HEIGHT MEASUREMENT WITH FORCE MINIMUM 6 TON.
7 - AFTER STAMPING, THE LAMINATION MUST BE SUBJECTED
TO STRESS-RELIEF ANNEALING AT 810°C WITH A NON-OXIDIZING ATMOSPHERE.

02	118043014	60900	FMS-2	-	-	-	-	-	X
	118043012	U230		-	-	X	-	-	-
	118043009	50CS1300		-	-	-	-	X	-
	118043008	E145		-	-	-	X	-	-
	118043007	E125		X	X	-	-	-	-
01	118043013	60900	FMS-1	-	-	-	-	-	X
	118043011	U230		-	-	X	-	-	-
	118043006	50CS1300		-	-	-	-	X	-
	118043005	E145		-	-	-	X	-	-
	118043004	E125		X	X	-	-	-	-
POS.	CODE	MATERIAL	LAMINATION TYPE						

MATERIAL : NON GRAIN ORIENTED ELECTRICAL STEEL		GEN. TOL. : $\pm 0,5$
		ANG. TOL. : $\pm 1^\circ$
		SCALE : 1:1
		UNIT: mm  A3
CODE :	TITLE, DOCUMENT TYPE	REPLACE:
DRAWN : EMERSON MOREIRA	STATOR - STACK	No.
APP. : TIAGO STAUDT		218023000
ECM : CR01452		
DATE : 2018.DEC.14	THIS MATERIAL IS CONFIDENTIAL AND PROPRIETARY TO EMBRACO, AND MAY NOT BE REPRODUCED, DISCLOSED, DISTRIBUTED OR USED WITHOUT PERMISSION	SHEET NUMBER: 1 OF 1