


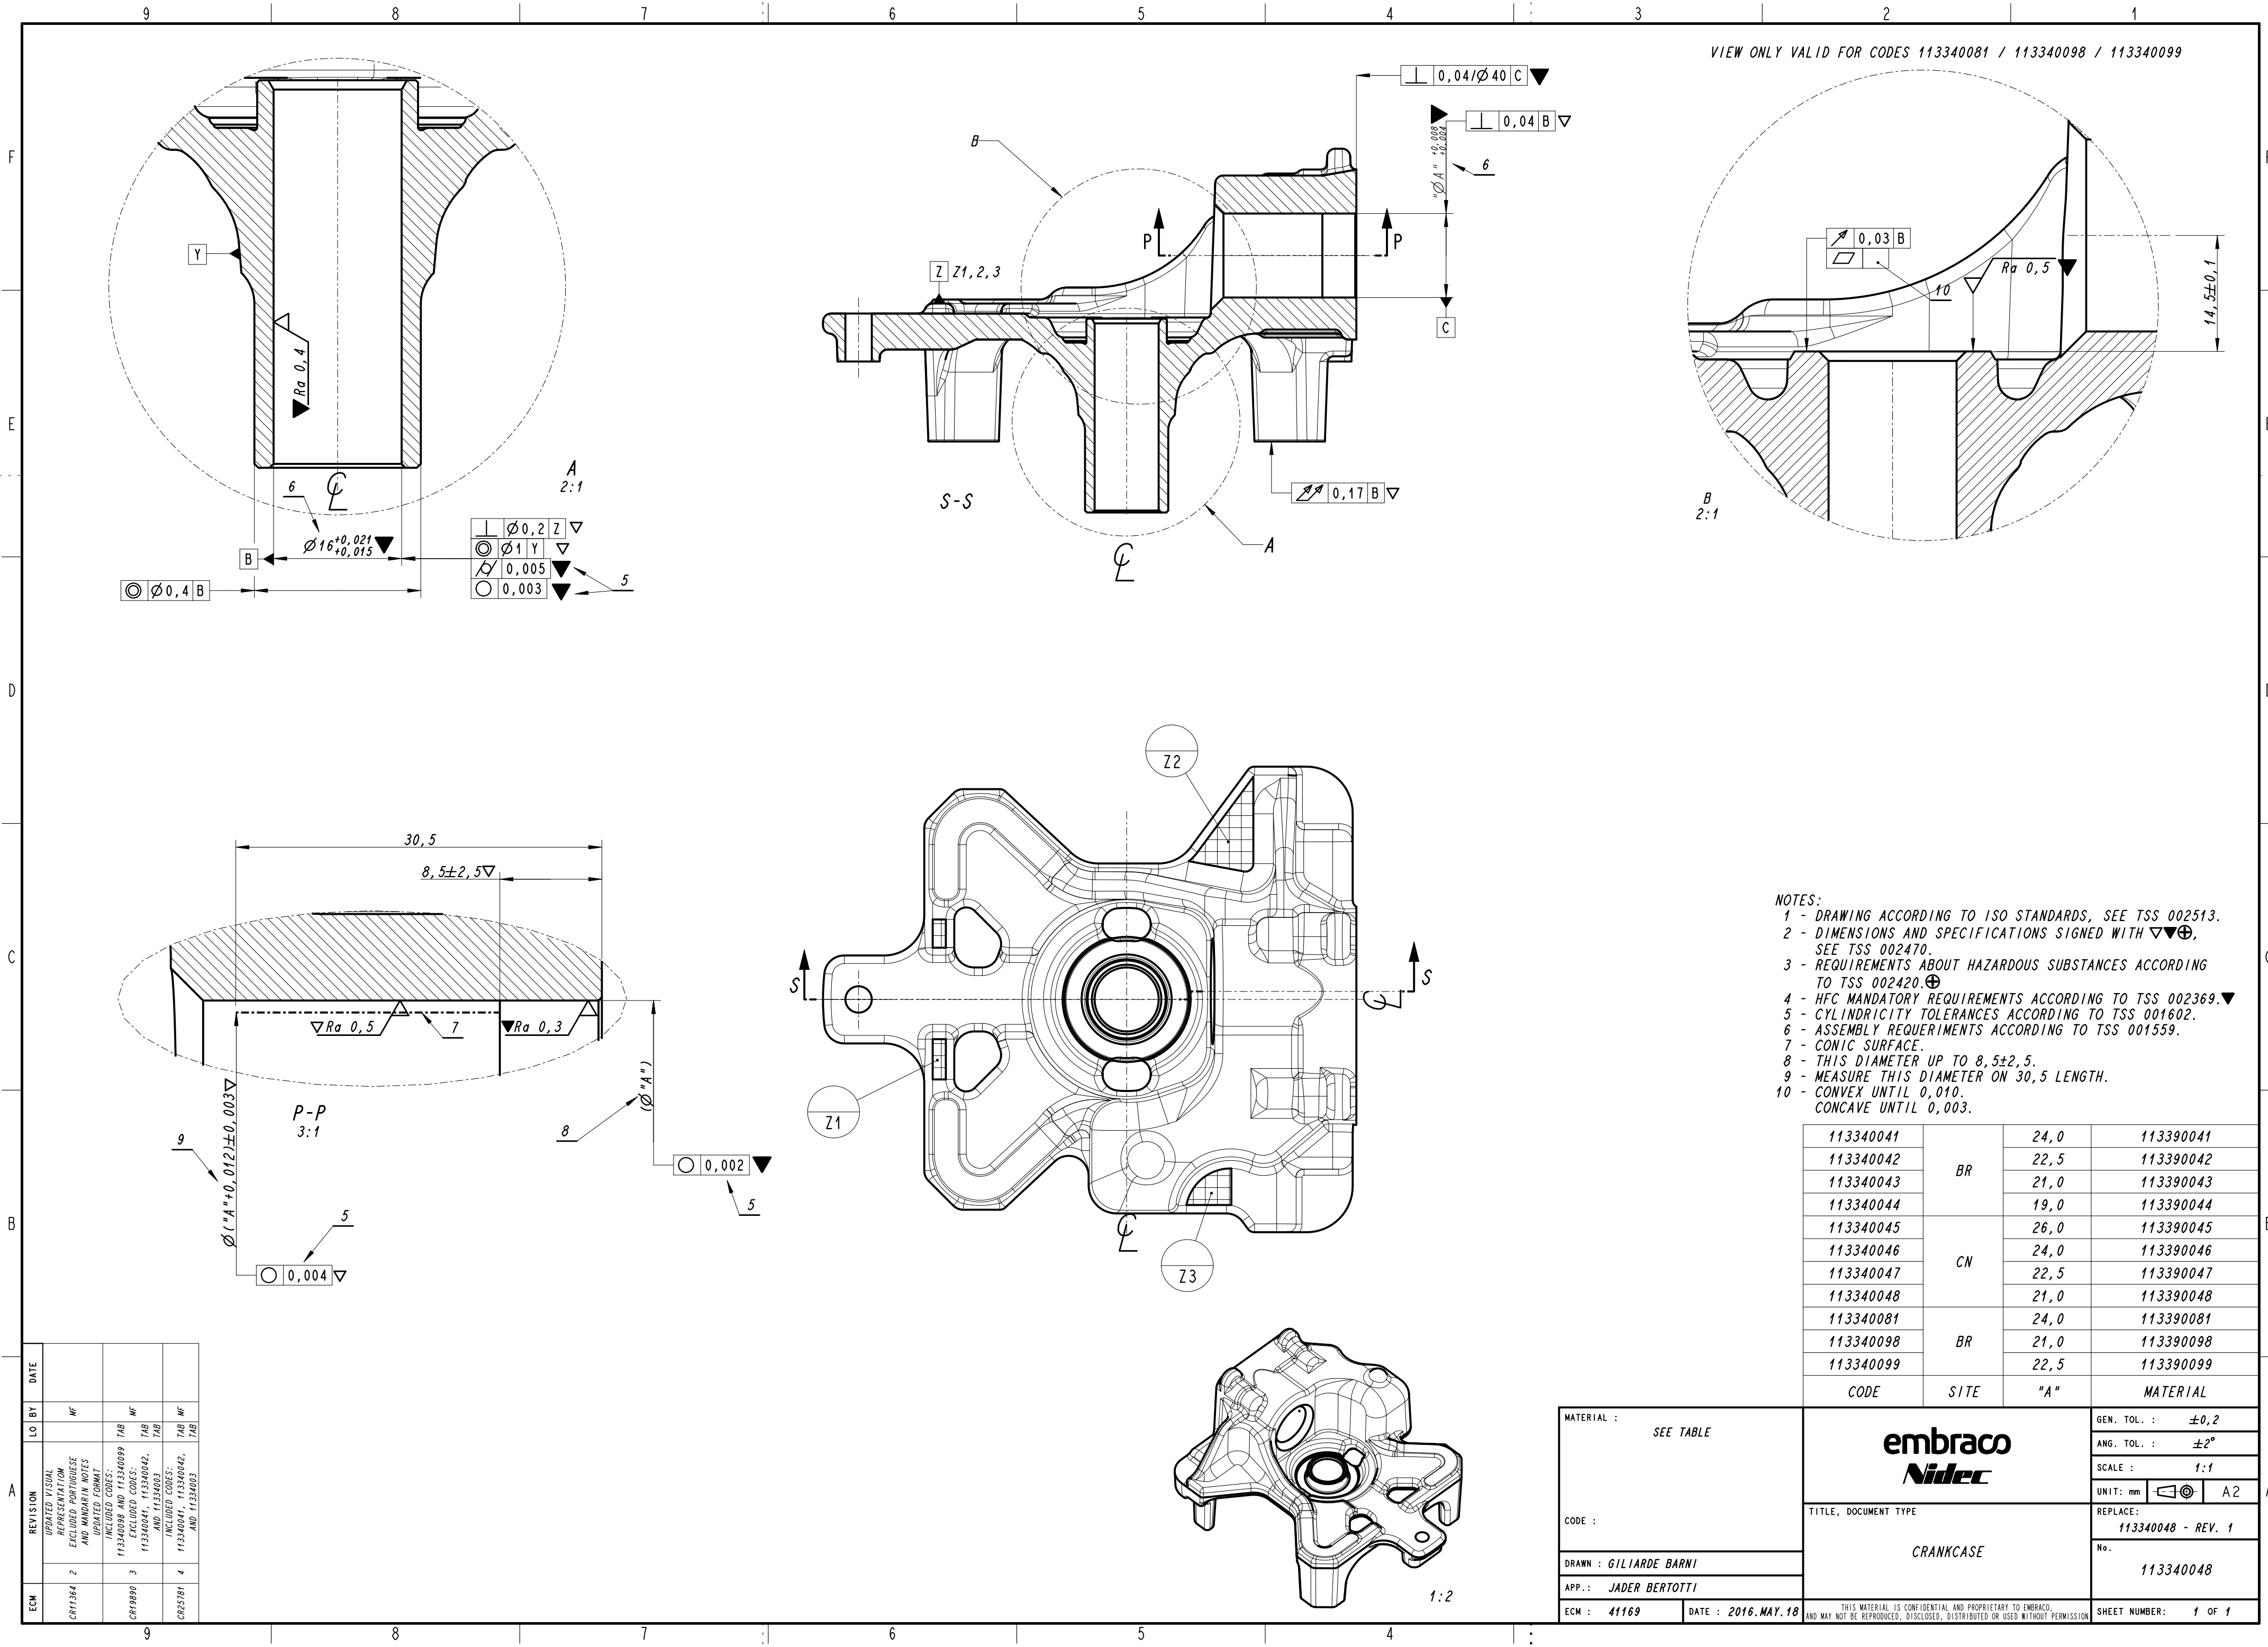

NOTES:
1 - DRAWING ACCORDING TO ISO STANDARDS, SEE TSS 002513.
2 - DIMENSIONS AND SPECIFICATIONS SIGNED WITH $\nabla\nabla\oplus$, SEE TSS 002470.
3 - REQUIREMENTS ABOUT HAZARDOUS SUBSTANCES ACCORDING TO TSS 002420. $\oplus$
4 - HFC MANDATORY REQUIREMENTS ACCORDING TO TSS 002369. ∇
5 - CYLINDRICITY TOLERANCES ACCORDING TO TSS 001602.
6 - ASSEMBLY REQUIREMENTS ACCORDING TO TSS 001559.
7 - CONIC SURFACE.
8 - THIS DIAMETER UP TO 8,5 $\pm$ 2,5.
9 - MEASURE THIS DIAMETER ON 30,5 LENGTH.
10 - CONVEX UNTIL 0,010.
CONCAVE UNTIL 0,003.

113340041	BR	24,0	113390041
113340042		22,5	113390042
113340043		21,0	113390043
113340044		19,0	113390044
113340045	CN	26,0	113390045
113340046		24,0	113390046
113340047		22,5	113390047
113340048	BR	21,0	113390048
113340081		24,0	113390081
113340098		21,0	113390098
113340099		22,5	113390099
CODE	SITE	"A"	MATERIAL

MATERIAL : SEE TABLE	embraco Nidec	GEN. TOL. : $\pm 0,2$
		ANG. TOL. : $\pm 2^\circ$
		SCALE : 1:1
		UNIT: mm
CODE :	TITLE, DOCUMENT TYPE CRANKCASE	REPLACE: 113340048 - REV. 1
		No. 113340048
		SHEET NUMBER: 1 OF 1
DRAWN : GILARDE BARNI	THIS MATERIAL IS CONFIDENTIAL AND PROPRIETARY TO EMBRACO, AND MAY NOT BE REPRODUCED, DISCLOSED, DISTRIBUTED OR USED WITHOUT PERMISSION	
APP. : JADER BERTOTTI		
ECM : 41169		
DATE : 2016.MAY.18		