

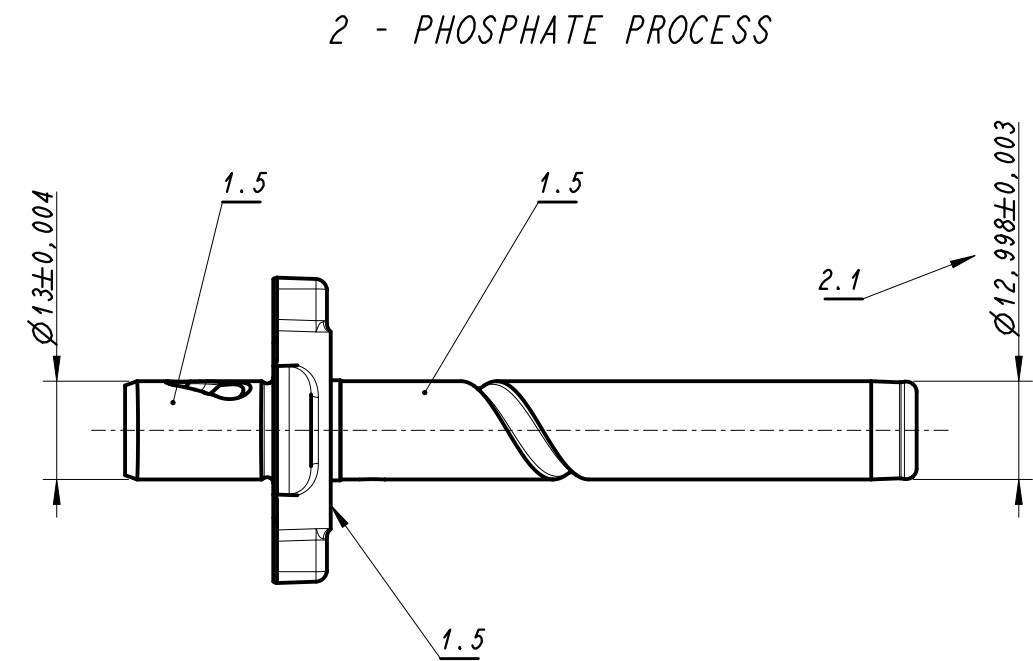
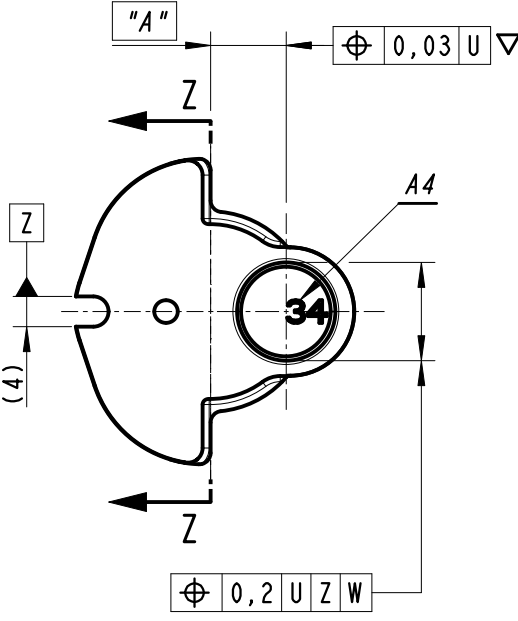
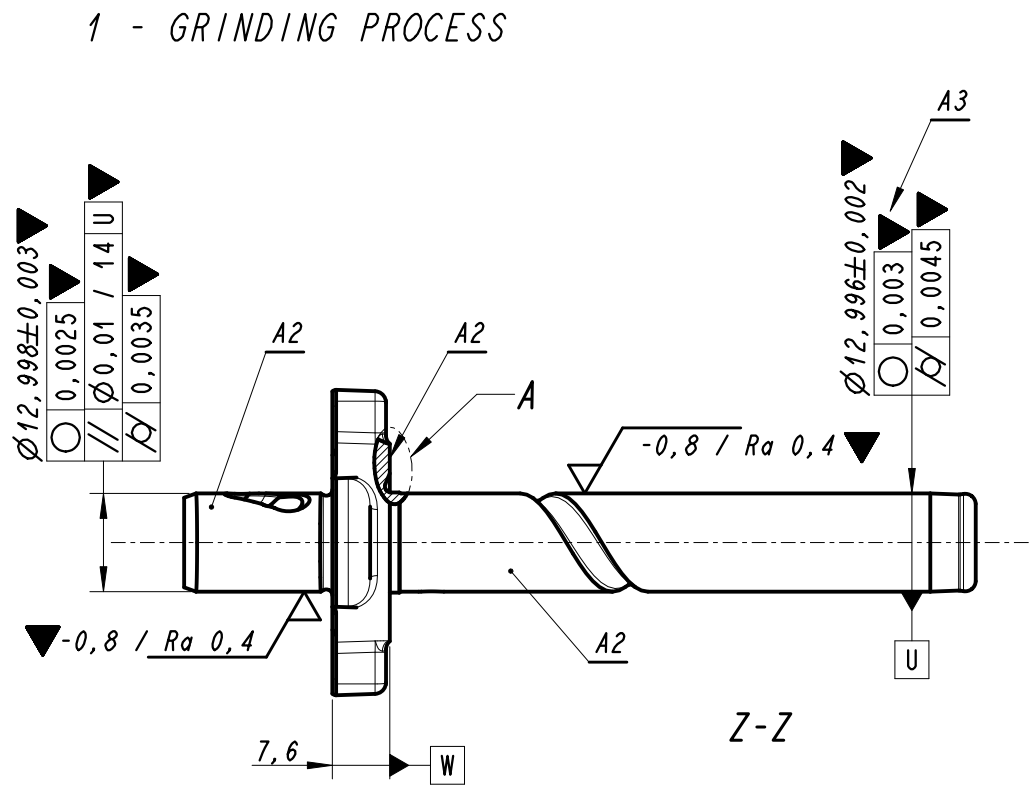


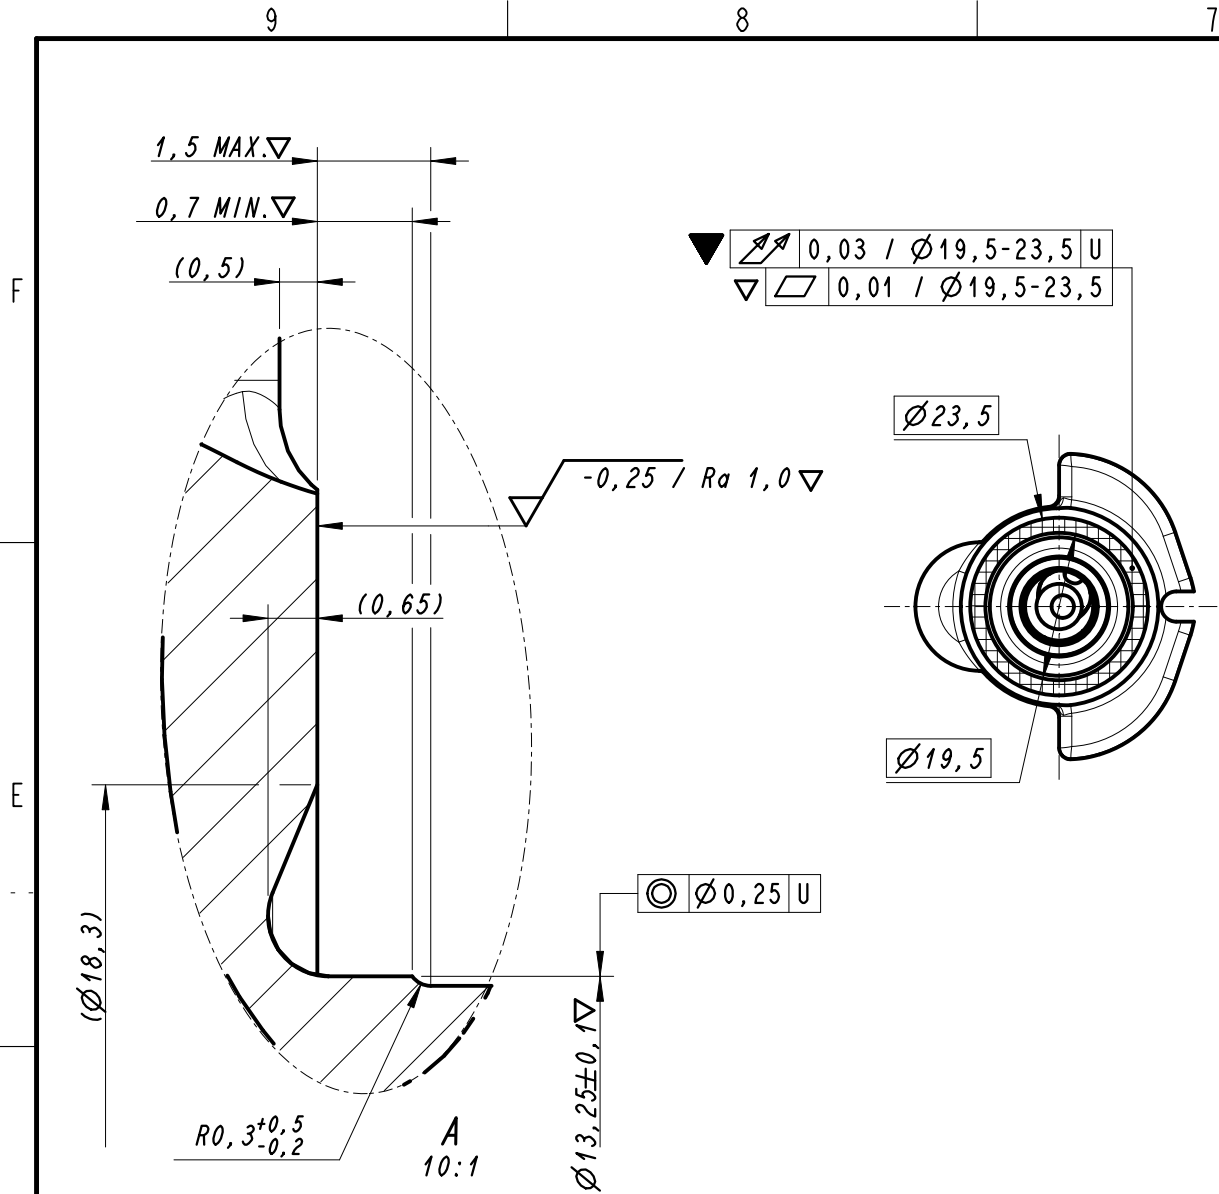


NOTES:
A1 - GEOMETRIC TOLERANCES ACCORDING TO TSS 001602.
A2 - REGIONS OF BEARING SURFACES MUST BE FREE OF SHOCK MARKS. ALL BORDERS, HOLES AND LUBRIFICATION GROOVES MUST HAVE SMOOTH EDGES AND FREE OF BURRS.
A3 - ROUNDNESS PROFILE CONTROL ACCORDING TO TSS 002621. ▽
A4 - IDENTIFICATION ALLOWED IN THIS AREA.

SECTIONS FOR MEASURING THE ROUNDNESS AFTER GRINDING:

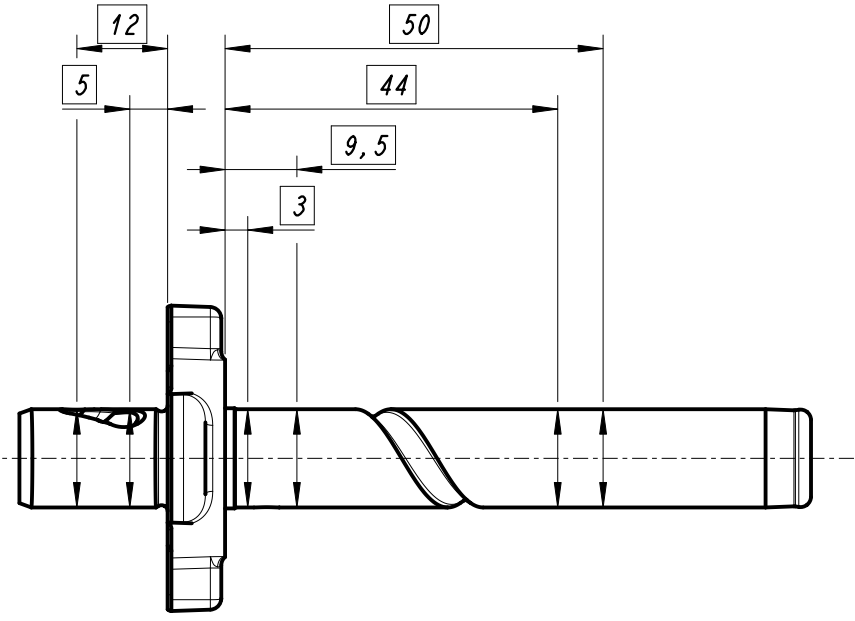

SECTIONS FOR MEASURING THE DIAMETERS AFTER GRINDING AND PHOSPHATE:

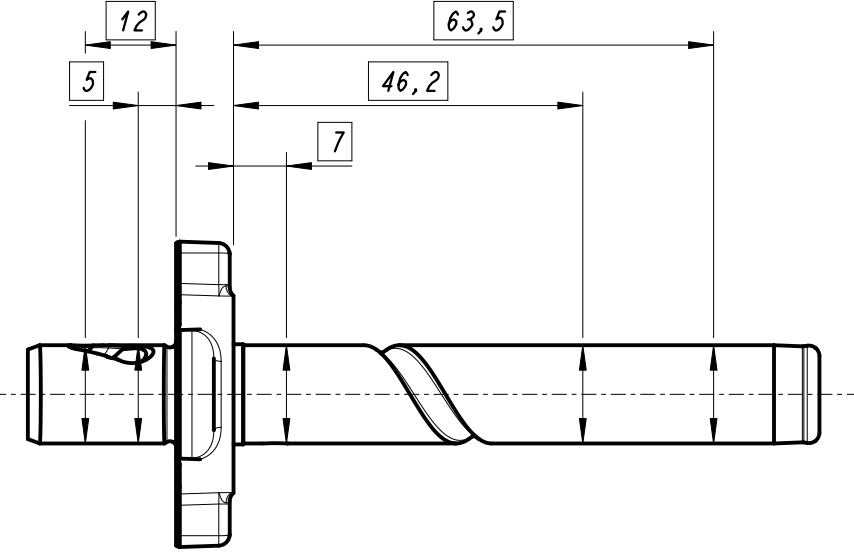

NOTES:
1 - GENERAL REQUIREMENTS:
1.1 - DRAWING ACCORDING TO ISO STANDARDS, SEE TSS 002513.
1.2 - DIMENSIONS AND SPECIFICATIONS SIGNED WITH ▽▽⊕, SEE TSS 002470.
1.3 - REQUIREMENTS ABOUT HAZARDOUS SUBSTANCES ACCORDING TO TSS 002420.⊕
1.4 - HFC MANDATORY REQUIREMENTS ACCORDING TO TSS 002369.▽
1.5 - REGIONS OF BEARING SURFACES MUST BE FREE OF SHOCK MARKS.
1.6 - ALL BORDERS, HOLES AND LUBRIFICATION GROOVES MUST HAVE SMOOTH EDGES AND FREE OF BURRS.
1.7 - ANY INCONSISTENCY WITH THE TSS, THE DIMENSIONS OF THE DRAWING SHOULD BE CONSIDERED.
2 - GEOMETRY AND DIMENSIONAL CONTROL:
2.1 - ASSEMBLY REQUIREMENTS ACCORDING TO TSS 001559.▽
3 - MATERIAL AND SURFACE:
3.1 - SURFACE COATING: MANGANIC PHOSPHATIZING ACCORDING TO ISO 9717.
COAT THICKNESS: 0,0005 TO 0,0015.

113344512	11,5	113394512
113344511	8,8	113394511
113344510	8,3	113394510
113344509	8,0	113394509
113344508	7,8	113394508
113344506	10,5	113394506
113344505	8,5	113394505
113344504	7,5	113394504
113344503	7,0	113394503
113344502	6,5	113394502
113344501	5,3	113394501
113342192	10,0	113392192
CODE	"A"	MATERIAL
MATERIAL : SEE TABLE		GEN. TOL. : ±0,2
		ANG. TOL. : ---
		SCALE : 1:1
		UNIT: mm
		A2
CODE :		TITLE, DOCUMENT TYPE
DRAWN : IGOR KASPER DEDECO		REPLACE:
APP.: ADILSON MANKE		No.
ECM : CR20410		113342192 - REV.3
DATE : 2022.SEP.19		113342192
THIS MATERIAL IS CONFIDENTIAL AND PROPRIETARY TO EMBRACO, AND MAY NOT BE REPRODUCED, DISCLOSED, DISTRIBUTED OR USED WITHOUT PERMISSION		SHEET NUMBER: 1 OF 1

REVISION	DATE	LO	BY
UPDATED THE DRAWING TO THE NEW LAYOUT FOR MACH. CRANKSHAFTS		F9	
INCL. DIM. (0,5)		E9	
INCL. DIM. (0,18,3)		F8	
GOAT 0,01 / 0,01 / 0,01		F8	
GOAT 0,01 / 0,01 / 0,01		F8	
INCL. DATUM REF. W		E6	
DATUM REF. U WAS H		E5	
INCL. DATUM REF. Z		F4	
INCL. DIM. (4)		F4	
DIM. [X] WAS "A"±0,015		F4	
INCL. GOAT 0,03 U		F4	
INCL. HIC		F3	
INCL. GOAT 0,2 U / 0,2 U		F3	
INCL. DIM. 0,1±0,004		F3	
INCL. DIM. 0,12,998±0,003		F1	
REMOV. DATUM REF. G		E5	
DIM. 0,12,998±0,003 WAS		F7	
DIM. 0,13±0,004		F5	
DIM. 0,12,998±0,002 WAS		F5	
0,13±0,005		F5	
INCL. NOTE 1,7		F5	
GOAT 0,01 / 0,01 / 0,01		F5	
GOAT 0,01 / 0,01 / 0,01		F5	
ECM		E8	