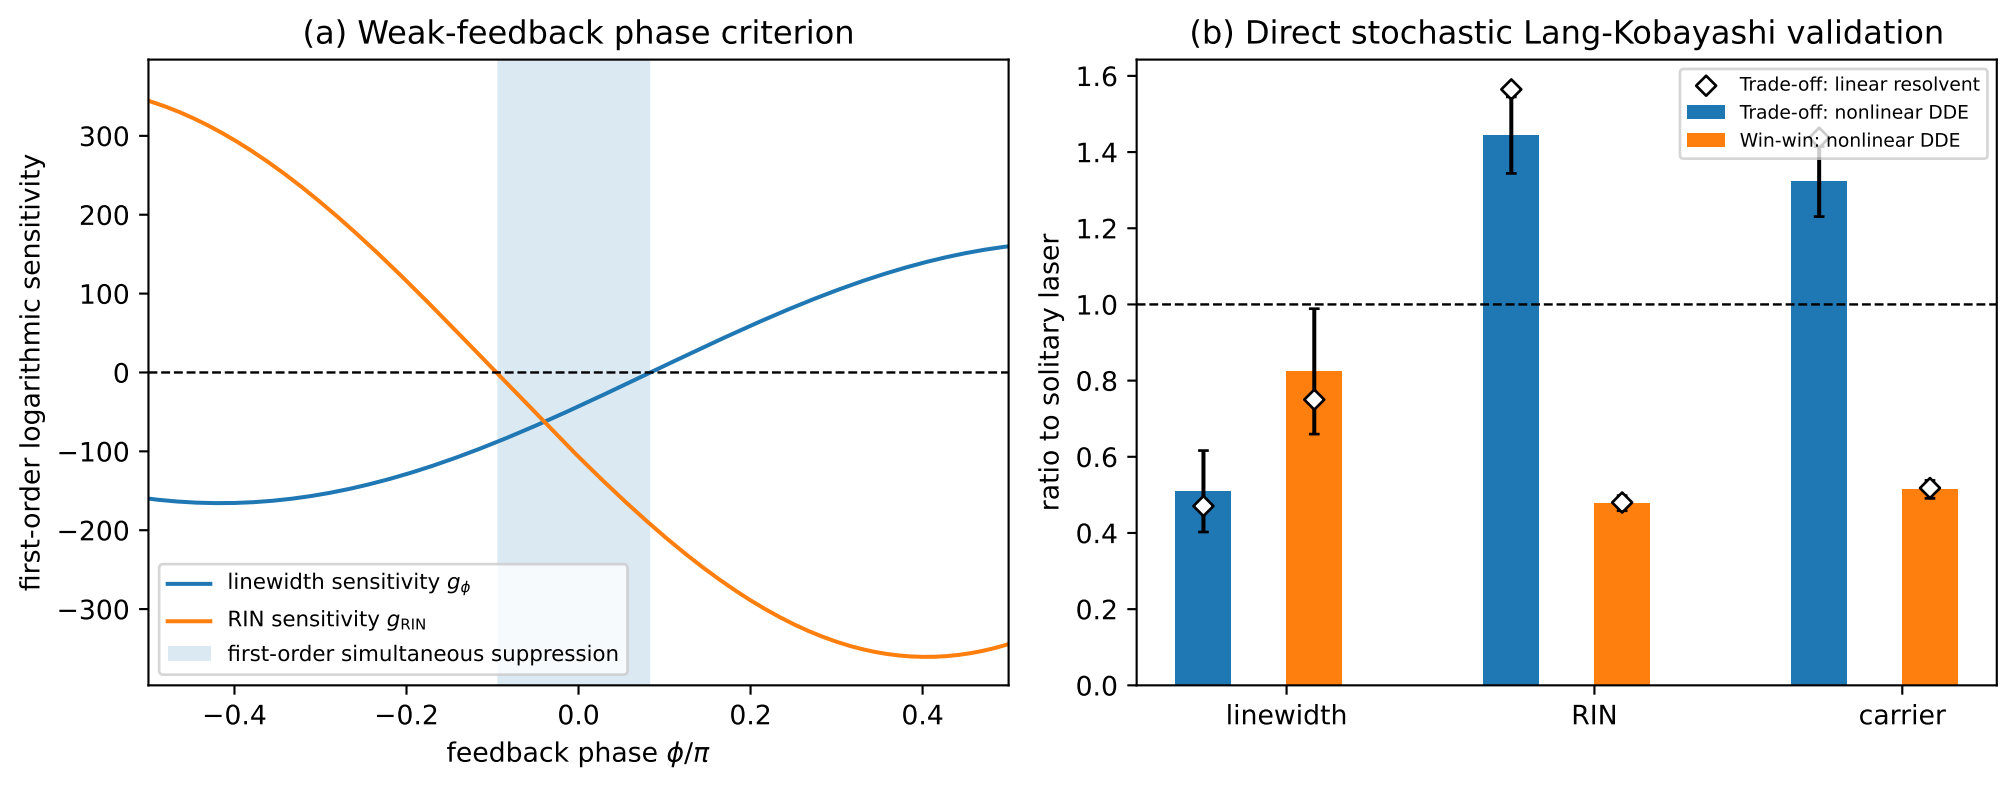
(a) Weak-feedback phase criterion
first-order logarithmic sensitivity
300
200
100
0
−100
−200
−300
−0.4
−0.2
0.0
0.2
0.4
feedback phase ϕ/π
linewidth sensitivity g_ϕ
RIN sensitivity g_{RIN}
first-order simultaneous suppression
(b) Direct stochastic Lang-Kobayashi validation
ratio to solitary laser
1.6
1.4
1.2
1.0
0.8
0.6
0.4
0.2
0.0
Trade-off: linear resolvent
Trade-off: nonlinear DDE
Win-win: nonlinear DDE
linewidth
RIN
carrier