



GLOBEX

COMPUTER SERVICES

Complete IT Infrastructure Solutions

PRESENTS



TECHNOLOGY AT IT'S BEST !!!



GLOBEX

COMPUTER SERVICES

Complete IT Infrastructure Solutions

TECHNOLOGY AT IT'S BEST !!!

Shop: B-14, Jalaram Ashish, Devi Dayal Road, Mulund (W), Mumbai 400080. Maharashtra, INDIA. Contact Nos.: 022 – 25624523 // 24. Fax: 25693964. Mobile: 9821119112 / 9324232809. E-Mail Id.: globexcomputers@gmail.com, ikplmulund@gmail.com, neeta@krishproducts.com.

303, Third Floor, So Lucky Corner, Andheri Kurla Road, Chakala, Andheri (E), Mumbai 400093. Maharashtra, INDIA. Contact Nos.: 022 - 28321107. Mobile: 09821071107 / 09323697880. E-Mail Id.: innovativekrishproducts@gmail.com.

Web: www.krishproducts.com.

Innovative GSM Products – A Glimpse ...

There is lots MORE to GSM // 3 G // Bluetooth and VARIOUS MOBILE PHONE Models than the regular available!!!

With GPRS active devices we can now track and record various activities without anyone's knowledge.

We are Importers of such Innovative Products that are a boom in the present market as they not only give a good functionality but are also maintenance free, not to mention the use of best quality raw materials by our factories as raw materials in manufacturing the products.

Each individual item that is made in our factories has passed a series of tests to give our clients quality products that they have always wished to own. Not only the spy products; we have various other products to attract your attention and you shall be in AWE of them. Kindly view all the products and their specifications too.

YES!!! We can rightly & PROUDLY say : "Our products are VALUE FOR MONEY!!!"

001 - Mini GPS Tracker with SOS Alert & Real-time tracking



Item Specifics:

GPS type:	GPS Tracker
is customized:	Yes
Brand Name:	ET-safe
Item Size:	77 x 37 x 23 mm
Voltage:	12~24 V
Out Power:	30 maH
Net work :	GSM / GPRS
Weight :	50g
Band :	850 / 900 / 1800 / 1900 Mhz
GPS sensitivity :	-159dBm
GPS accuracy :	5m
Car charger :	12~24v input , 5v out put
Wall charger :	110~220V input , 5v out put.
Battery :	3.7v 1000Mah li-on battery.
Stand by time :	about 200hours.
SOS :	support SOS button.

001 - Mini GPS Tracker with SOS Alert & Real-time tracking



Real-time query location by installing the client software on smartphone



Product Description:

Super mini waterproof IPX6 portable gps tracker +SOS panic button +free real time tracking software +easy hidden best for kids.

Functions:

- 1. GPS and Location Based Service** Location Based service also named A-GPS, when tracker in underground or tunnel ,can get location by AGPS.
- 2. Real time tracking** Real time tracking it by cell phone and platform . Also can support get location every 5 seconds, and the GPS accuracy is 5m .
- 3. Check the history of route on platform** Can check and replay within one year history of route of device ,by web monitor centre.
- 4. Monitoring and communication** Can hear the voice around the tracker by cell phone . Also support communication with the tracker by cell phone (OEM).
- 5.SOS Alarm** SOS button ,when user have emergency , press the SOS button ,the tracker will send “help me “ SMS to all authorized phone number and monitoring web platform.
- 6. Power Saving Mode** The device go into standby mode when there isn't vibration for 3 minutes , it will go into working mode when it feel vibration.
- 7.Google map on mobile** Check the location with google map on mobile.
- 8. Geofence and movement alert** Set up a geo-fence for the unit to restrict its movements within a district ,unit will send a message to the authorized number when it breaches the district..
- 9.Overspeed alert** set up the speed as your requirement, and will get the alert when over speed.
- 10.Low Battery Alarm**

001 - Mini GPS Tracker with SOS Alert & Real-time tracking



How to use the tracker :

1. Put the SIM card and battery in place.
2. Turn on the unit outdoors by pressing the "on/off" button until the indicator is on.
3. For first use, please initialize the unit and restore it to default setting. (Please refer to 5.4 for instruction.)
4. In 10 or 40 seconds, the unit will begin to work and acquire the GSM signals as well as the GPS signals.

The indicator will keep flashing every 3 seconds when the unit has received the signals.

5. When this unit receives GPS signals normally, you can use it and do any setting as the instructions of this manual.

TECHNOLOGY AT IT'S BEST !!!

001 - Mini GPS Tracker with SOS Alert & Real-time tracking



Package including :

- 1 x LK106 Main unit with battery
- 1 x The screwdriver
- 1 x USB data cable
- 1 x travel charger
- 1 x user manual

Free online tracking service , if you need online web service please kindly give tracker IMEI no to us , we will activated for you.

002 – GSM Tracker SOS Pendent



Item specifics:

Intended Use: Pet Cell Phone Child.

Name: GPS Tracker.

Alarm Type: Apps Control.

other Alarm ways: SOS alarm, fence alarm, mobile police.

Model Number: 002.

Special Feature: Waterproof / Portable.

Use for: kids elder pets Vehicle GPS Tracker.

Item Type: Child Anti-Lost Watch.

Size: 40.5 x 43.3 x 13.8 mm.

002 – GSM Tracker SOS Pendent



Description

Product Name: 5 pcs / lot Mini Portable Waterproof GPS Tracker SOS Pendant for Personal and Vehicle with WIFI Fence Geo-fence alarm V28 Ann.

Category: Anti - Lost Alarm.

Short Description: Real-time tracking/Locating ways: GPS + LBS + AGPS + WIFI / WIFI Fence / Historical route playback / Geo-fence / SOS alarm & push-button calling / Talking clock / Fall alarm / Low battery & SIM card change reminders.

Quantity: 1 Lot (5 Piece / Lot).

Package Size: 20.0 x 20.0 x 20.0 (cm).

Gross Weight : Package:1.2 (kg).

TECHNOLOGY AT IT'S BEST !!!

002 – GSM Tracker SOS Pendent



Mini GPS Tracker

DHgate.com e2380924093

Product View:



Chip side up and narrow edge in



Insert the whole card into slot

Description : Mini Portable Waterproof GPS Tracker SOS Pendant for Personal and Vehicle with WIFI Fence Geo-fence alarm V28.

Main Features:

Real-time tracking.

Locating ways: GPS+LBS+AGPS +WIFI.

WIFI Fence.

Historical route playback.

Geo-fence.

SOS alarm & push-button calling.

Talking clock.

Fall alarm.

Vibrate on Ring for incoming call remind.

Two way audio communication.

Mute automatic answering calls for voice monitor.

Low battery & SIM card change reminders.



**Precise Manufactured,
Simple Applied!**

Reduce the chance of getting lost.
More peace of mind for your family.

GPS Tracking SOS Pendant

There is some homeless senior people
behind each missing notice.



There are **1370** missing people in China every day.
then what is the number for the whole world?

HOW TO REDUCE THIS NUMBER?

Prepare a *GPS Tracking SOS Pendant* for your family!



**One Key Talking!
Precise Positioning!**

Peace of mind for your loved ones!

Once I was your sweet burden,
Now you are my warm caring!

Never get worried
when they back late.

Real-time GPS Tracking



WIFI+GPS+LBS+AGPS, four positioning
ways work at the same time.

Positioning accuracy:

GPS Location <10-30m

WiFi Location <15-100m

LBS Location:100-1000m

AGPS make positioning quickly





Never get worried
when they back late.



Real-time GPS Tracking



WIFI+GPS+LBS+AGPS, four positioning ways work at the same time.

Positioning accuracy:

GPS Location <10-30m

WIFI Location<15-100m

LBS Location:100-1000m

AGPS make positioning quickly



Fall Alarm



When the user falls, the guardian will get an SOS alarm from the GPS tracker, meanwhile, the tracker also sends out loud alarm sound.

WiFi Geo-Fence

When the user goes out the house, and out of the WiFi area, the guardian will get a Geo Fence alert via App. This is very useful to know if your cared ones is at home or not.



SOS Call & Ordinary Call

The bigger SOS key becomes, the easier you can press for help.



Specification:

2G GSM: 850 / 900 / 1800 / 1900 MHz.

GPRS Standard: Class 12, TCP / IP

GPS locating time: 60 sec with cold boot (open sky).

29sec with warm boot (open sky).

5sec with hot boot (open sky).

GPS positioning accuracy: 10 - 15m (open sky).

WiFi positioning accuracy: 15 - 100m (wifi area).

LBS positioning accuracy: 100 – 1000 m.

Working temperature: -18 ~ + 45.

Working humidity: 5 % ~ 95 % RH.

Device host size: 40.5 x 43.3 x 13.8 mm.

Device host net weight: 25 g.

Battery capacity: 400 mA.

Package Include:

1 x Main host RF-V28.

1 x Lanyard.

1 x USB Charging cable.

1 x User manual.

003 - Mobile Glasses




Technical Specs:

Color: Black // Camera: 2 Megapixel High Resolution Camera // Video Format: AVI // Contact: 250 Phone Number // MP3 Music: MP3 Ring Sound // Radio: FM (Need an earphone) Standby Time: About 160 hours // Memory: TF Card 32 GB Support Operating System: MTK // Locate Function: Support GPRS (Only support SIM card) // Screen: 2.5 Inch OLED High Resolution Music Play: MP3 Background Operation, Bluetooth High Fidelity Stereo Output // Language: Chinese, English, French, Portugal, Italian, German, Indonesian, Vietnamese, Russian, Arabic, Thai, Swedish. Conversation: Hands-free // Bluetooth: V2.0 – 3.0 Battery Capacity: 520 mA // Continuous Conversation Time: About 5 Hours // Data Transmission: USB & Bluetooth 2.0 Wireless Transmission // Charging Interface: 2.5



005 – GPS Tracker N -11

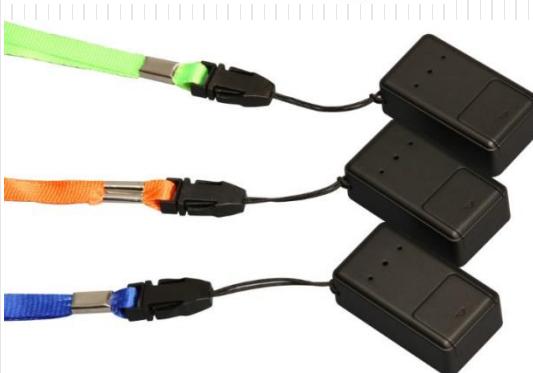

Specifications:

GPS type: GPS Tracker // Color: black // Quality: high // Keywords: GPS Tracker // Certification: CE CCC Rohs

Introduction:

The product applies the latest intelligent positioning system for six base stations. It is more accurate and also faster than the traditional positioning system for single base station or three base stations; it has adopted Google map V3 which covers the majority of the countries; it is also fitted with the audible alarm which features clear acoustics and long stand-by time, small size, stable performance and convenient installation; it is mainly used for the monitoring, protection and tracking of houses, children, old people, pets, cars and warehouses.

005 – GPS Tracker N -11



Technical parameters:

GSM frequency ranges: 850/900/1800/1900 // GPRS:Upload60, TCP/IP // Working voltage: 3.4-4.2V DC // Standby current:2.5mA // Start sound-controlling current:30mA // Speaking current:150mA // GSM positioning time: 35s // Working ambient temperature: -20 dEgree+70degree // Working ambient humidity: 20%~80%RH // Dimensions: 41 (L)* 23 (W)* 14.5(H) mm

Warm prompt:

The instructions for the setting of parameters below shall be written in small letter and shall adopt English punctuation marks. For all the instructions, the reply messages will be sent out. If the setting is successful, the message which informs the success of setting will be sent out; and on the contrary, the setting shall be repeated. All the mobile phones are able for the checking of location. Other functions shall be operated with the service center number. Send out the relevant instructions and the terminal will send you the relevant message.

Specifications:

GPS type: GPS Tracker

Color: black

Quality: high

Keywords: GPS Tracker

Certification: CE CCC Rohs

Introduction:

The product applies the latest intelligent positioning system for six base stations. It is more accurate and also faster than the traditional positioning system for single base station or three base stations; it has adopted Google map V3 which covers the majority of the countries; it is also fitted with the audible alarm which features clear acoustics and long stand-by time, small size, stable performance and convenient installation; it is mainly used for the monitoring, protection and tracking of houses, children, old people, pets, cars and warehouses.

Technical parameters:

GSM frequency ranges: 850/900/1800/1900

GPRS:Upload60, TCP/IP

Working voltage: 3.4-4.2V DC

Standby current:2.5mA

Start sound-controlling current:30mA

Speaking current:150mA

GSM positioning time: 35s

Working ambient temperature: -20 dEgree+70degree

Working ambient humidity: 20%~80%RH

Dimensions: 41 (L)* 23 (W)* 14.5(H) mm



Warm prompt:

The instructions for the setting of parameters below shall be written in small letter and shall adopt English punctuation marks.

For all the instructions, the reply messages will be sent out. If the setting is successful, the message which informs the success of setting will be sent out; and on the contrary, the setting shall be repeated.

All the mobile phones are able for the checking of location. Other functions shall be operated with the service center number.

Send out the relevant instructions and the terminal will send you the relevant message.

Package Includes:

- 1 x N11 GSM system tracker device
- 1 x USB cable

3.1 boot:

Open the small lid on the device and insert the SIM card into the deck automatically. Power, the light flash a few seconds, stay out of light, covered with a small lid to use.

Note:

- Please use 2G - GSM network signal better SIM card (such as: mobile)
- Terminal SIM card needs to be opened Caller ID
- The terminal SIM needs to enable GPRS function
- The terminal SIM card PIN is turned off



3.2, set the center service number:

Use the mobile phone to dial the SIM card number in the device, dial the connection, and hear the sound around for about 10 seconds, your mobile phone will receive the "center number set successfully" message ring, then you can hang up the phone. If you do not receive the "center number set successfully" message, the service center number setting failed.

3.3, restore the factory settings:

When the setting parameters of the terminal are not set correctly, the terminal will work abnormally. You can send a message to reset the terminal parameters to the factory default settings, and try to make the terminal work again.

The factory reset instruction is: factory #

When the terminal receives the instruction. The terminal will be set back to the factory default settings parameters, all the previous manual setting parameters disappear (including the service center number will disappear)
If the terminal restores the factory settings successfully, the message "Restore factory settings successfully" is returned.

3.4, location network link SMS query

When it is needed to query the location network link information of the terminal device, it may send "url #" to the SIM card of the terminal device, and the terminal will reply the location information of the network link last located

Instruction: url #

Location Inquiry SMS reply message example:

battery = 100%, http://minigps.net/loc.do? x = 012743 & y = 10081 & z = 0025642
51 & n = 0 & c = 460 & a = 10136 & e = 4272 & s = 21 & v = m1.0 & l = ch_ZN & p = 3

3.5, SMS Chinese address query

When you need to check the Chinese address information of the terminal device, you can send "123" to the SIM card of the terminal device. The terminal will reply the location information of a Chinese address. If the terminal has not searched for the location information, please reply nothing. Move your location, send instructions again to get the Chinese location information Order: 123

Chinese address query message reply message example:

Futian District, Shenzhen City, Guangdong Province

3.6 platform query

Note: This feature MUST set the GPRS parameters first (see 3.12)

Open the service platform URL: _____, type the user name and password to operate on the service platform.

3.7 Automatic continuous positioning (this feature default off state)

3.7.1, send SMS "fix time s times n #" to the device, continuous positioning is set successfully.

Example: fix060s005n #

This example shows that the device sends the latitude and longitude information every 60 seconds, sending a total of 5 times. (S: seconds, m: minutes) This directive must be set with 3 digits and the maximum value is 600

3.7.2 unlimited positioning

Send SMS "fix080m *** n #" to the device, set an unlimited number of consecutive success.

Example: fix080m *** n #

This example shows that the device sends latitude and longitude information every 80 minutes without limit

3.7.3 Cancel automatic continuous positioning

Send SMS "nofix #" to your device. If automatic continuous positioning cancellation is successful, the device will reply "Cancel automatic continuous positioning" message

Example: send "nofix #" to the device, cancel automatic continuous positioning

3.8, voice-activated remote switch

3.8.1 Send "1111" SMS content to the SIM card number of the device by using the mobile phone, after the message is sent successfully, the voice control function is about to turn on : Voice on command: 1111

If the voice control is enabled successfully, the message "Voice control enabled" is returned

3.8.2 send "0000" SMS content to the SIM card number of the device by the mobile phone, after the successful sending of the SMS, the voice control function is going to be closed: Voice close command: 0000

If the voice control is successfully set, the message "Voice control closed successfully" is returned.

3.9, voice sensitivity settings:

When the device's voice sensitivity is not satisfied for you, you can send text messages to adjust the device's voice sensitivity.

Instruction format: level, sensitive value #

Sensitivity value setting range: 30 - 100, the greater the sensitivity value of the device more sensitive to the voice sensitivity

Example: level, 83 #

The example shows that the device's acoustical sensitivity value is set to 83

If the voice sensitivity setting is successful, then restore the "voice sensitivity setting is successful! Sensitivity of 83" message

3.10, terminal restart function:

When the terminal works abnormally, for example, the terminal is not located, you can send a text message to the terminal. So that the terminal performs a remote restart so that the terminal resumes normal operation. **Terminal restart setting instructions: reset #**. When the terminal receives the instruction, restart the terminal immediately. If the terminal reboots successfully, reply "reboot successfully" message

3.11, set GPRS transmission positioning data interval time:

The terminal default GPRS transmission positioning data interval of 60S, that is, every 60 seconds to the platform server. Upload a positioning data. To set GPRS transmission positioning data interval, you can edit send GPRS timing setting. **Set instructions: Instruction format:** upload, timing time # (seconds). **Time setting range:** 0 or 60-1800 seconds, "0" means not to upload data

Example: upload, 60 #. The example shows that the interval of GPRS transmission positioning data is 60 seconds, that is, every 60 seconds to the background server. Pass a positioning data. If the setting is successful, then reply "Upload Interval Time Set Success! Interval Time" 60 "Information.

3.12, set GPRS parameters

3.12.1 Set APN

Different countries have different GSM communication operators APN are different, you need to know your APN SIM card, please consult with the local communications operators. **Instruction format:** apn, network name #. Example: apn, cmwap #. In the example, cmwap represents APN of China Mobile operator. If APN setting is successful, reply "APN setting successful" message. Command format apn, network name, user, user name, pd, password #.

Example: apn, cmwap, user, yidong, pd, 123 #.

Example "yidong" on behalf of the user name, "123" on behalf of the password.

If the GPRS login user name and password is set successfully, then reply "GPRS user name and password is set successfully" information.

3.12.2 Set GPRS login user name and password:

In most countries, GPRS login user name and password can be omitted, you can skip this step setting.

For countries that want to use a user name and password, you need to make the following settings.

3.13, language and time settings:

The terminal provides the display in both Chinese and English. The time in different regions is set according to the time zone.

Instruction format: lang, x, zone, n #

x is a linguistic choice 0 is English, 1 is Chinese, n is a time zone option, East 8 is 8, West 3 is -3

Example: lang, 1, zone, 8 #

In the example, "1" means "Chinese" and "8" means East 8th China time. If your country's time zone is negative, send "lang, 0, zone, -8" like this.

3.14, query parameters:

When you need to check the parameter setting status of the terminal device, you can write "param #" message and send it to the SIM card number of the terminal device, and the terminal will reply the corresponding parameter query content.

Example: param #

Information Return Content Example:

imei: 386201209006236

apn: cmwap

IP: usa.gpsjm.com: 8500

UPLOAD: 8

CENTER: 12345678901

LEVEL: 80

LANG: EN

ZONE: E8



3.15, check the software version number:


Check the software version of the current device

Directive: verno #

Information Return Content Example: N11-V1.0 2013-11-8 18:00



006 - GSM / GPRS Tracker – SMALL

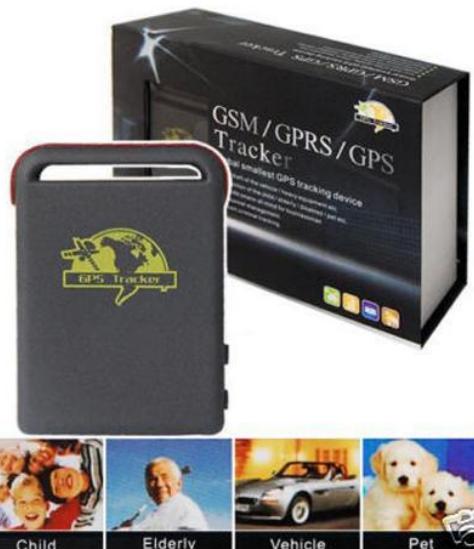

Specifications:

- The product is intended for fleet tracking, field force automation or personal location tracking. Would you like to...
- View the whereabouts of your entire fleet from your desktop?
- Know the closest vehicle or technician to the next job site?
- Access yesterday's detailed route history for every vehicle in your fleet?
- Want to protect your Nokia device against theft?
- With a system based on Krish GSM Tracker, you can!


Applications:

- Anti-theft of the vehicle/ heavy equipment etc
- Protect child, the old, the disabled, pet etc...
- Provide peace-of-mind for businessmen
- Manage personnel
- Track criminal secretly

006 - GSM / GPRS Tracker – SMALL

- unit line
- car line
- schematic
- cut

wiring diagram

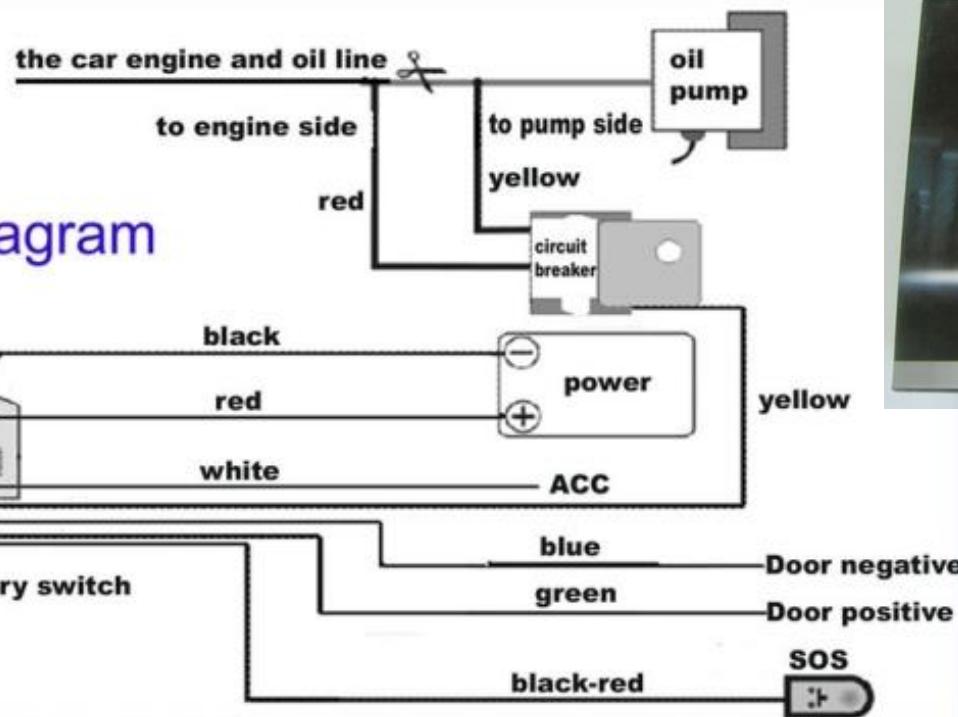

006 - GSM / GPRS Tracker – SMALL



Gsm gps tracker Track exactly. Can be used for preventing theft of vehicles, the protection for kids, old persons and pets, the management of personals, track secretly.

- * The tracking for vehicle-renting/outdoor machines
- *The monitoring for kids, old persons, disabled and pets.
- *The protection for the businessmen.
- * Management for the staff outside.
- *Tracking for criminals.

006 - GSM / GPRS Tracker – SMALL

TECHNICAL SPECIFICATIONS: New Mini Global GPS Tracker for everyone (including yourself, your wife, your kids, your pet, your gold stash and everything else!). With compact design, convenient SMS functions and the latest in GPS tracking technology, it is the one all-purpose tracker for everyone needing to track their valuable asset and loved ones. Easy to use: All you need is a working SIM card to insert into the unit, charge the battery, and you are ready to go. With **Quad-Band GSM** connectivity, it works anywhere in the world. It even comes with a handy weatherproof bag to attach to your belt or backpack.

Tracks Everyone and Everything: **Outdoor sports and recreation:** Hiking, biking, skiing, mountaineering, etc, whatever your sport is, take one with you and your loved ones will have peace of mind while knowing exactly where you are.

Surveillance: Secretly put it with a person, or his belonging, and you can monitoring where they are going. It comes with a magnetic back cover to attach itself to any steel object, consciously or "unconsciously"! **Children and Seniors**

Citizens: drop it in their pocket or backpack and you will never have to worry about them getting lost again. All you need to do is make a call to the **Mini Global GPS Tracker** and it will text back their exact location to you instantly! Apart from these simple track-n-trace functions, it also has more advanced functions such as:

- SOS button: It sends "Help ME" and location of the tracker to all authorized numbers.
- Geo-fencing control - When the tracker moves in/out the pre-set scope, it will send an SMS alarm to the authorized phone number.
- GPRS: With a GPRS enabled SIM card, you can monitor real-time movement of the tracker with the supplied software on your computer.

TECHNOLOGY AT IT'S BEST !!!

006 - GSM / GPRS Tracker – SMALL



At Glance... Compact and Easy to use // Global coverage with quad-band GSM frequency
Multiple function through SMS // SOS Function // Silent listener in Monitoring Mode // GPRS and Internet application.

Specifications: GPS Chip: SIRF III chip // Network: GSM / GPRS // GSM Frequency: 850 / 900 / 1800 / 1900 // GSM/GPRS Module: Simcom Sim340 // GPS Sensitivity: -159 Dbm // GPS Accuracy: 5 M // Time to First Fix: -Cold status: 45s // -Warm status: 35s // -Hot status: 1s // Battery: Rechargeable 3.7 V 1000 mAh Li-ion Battery // Battery life: 80 Hours standby // Working Temperature: -20 to 55 // Humidity: 5% to 95% non-condensing // Altitude Limit: 18,000 meters (60,000 feet) max // Velocity Limit: 515 meters/second (1000 knots) max // Acceleration Limit: Less than 4g // Dimension: 64 (L) x 46 (W) x 17 (H) mm // Weight: 50 g

Notes : Compact, easy to carry, and comes with a magnetic battery cover to attach to any steel object // Can send GPS information by SMS on demand or periodically within a time frame // The unit has a built-in mic and can be used as a "silent listener" without letting the carrier know that his/her conversation or activities are been listened. // Comes with detailed instructions on how to work with GPRS enabled SIM and setup internet monitoring(fixed IP only), so constant tracking information can be displayed on a detailed map

Package Include : Mini Global GPS Tracker // Battery Charger // Power Adaptor // Battery x 2 // Software CD // English Manual.

006 - GSM / GPRS Tracker – SMALL

This product can locate accurately and be used in guarding Vehicle against theft, Protecting child / Elderly / disabled / pet, Managing personnel and Tracking criminals secretly.

Details: Working Based on existing GSM/GPRS850/900/1800/1900MHZnetwork and GPS satellites, this product can locate and monitor any remote targets by SMS or Computer or PDA.

Advantages of products:

1. Multiple tracking ways; Provide monitor software with the global map free, real-time track by your computer or PDA cell phone or google earth.

2 Standby 12hours.

3. Small cubage; Dimension: 46*64*17mm (1.8*2.5*0.65inch)Weight: 40g Integration design(antenna and battery inside);easy to hide and take along with you

4. Support orientation without orientated server: it can find out Real-time longitude and latitude, time and speed. By using public map software and entering longitude and latitude manually, you can find out the real-time information of position.

5. Can support platform:

When using platform, it can track targets in real time on electronic map, or inquire the target's position by mobile phone.

6. If the target you are inquiring enters into underground parking lot or other GPS blind area, the tracker will inform you the last orientation.

7. Tracking function by timing and frequency

8. Authorized number added and deleted function

9. Support hidden alarm and monitor function


10. Geo-fence: Set up a geo-fence for the unit to restrict its movements within a district. The unit will send the message to the authorized numbers when it breaches the district.

11. Movement alert: you can set up barriers when the tracker is stopped. Once moved, it can give an alarm to the authorized number.

12. Over speed alarm: you can make the inspected target run according to fixed speed. It alarms when speed is exceeded.

13. Low battery alarm function

006 - GSM / GPRS Tracker – SMALL

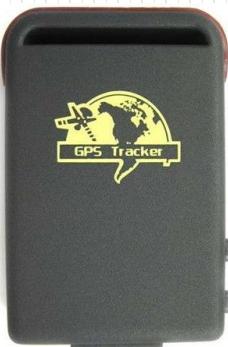

Optional functions:

1. Quiver alarm
2. Electronic lock: if the inspected target remove tracker, it will send alarm information to warranted number automatically.
3. Vehicle guard: oil cut and power off for long distance

Applying directions:

1. Vehicle rental/out-door machines and equipments ect. guard tracking
2. Protect child / the old / the disabled / pet etc
3. Provide peace-of-mind for businessmen
4. Manage personnel
5. Track criminals secretly

Technology parameter:

GPS chip SIRF3 chip
GPS sensitivity -159dBm
GPS accuracy 5m

Time To First Fix Cold status 45s, Warm status 35s, Hot status 1s
Car charger 12/24V input, 5V output
Battery Chargeable changeable 3.7V 800mAh Li-ion battery.

TECHNOLOGY AT IT'S BEST !!!

007 - GSM / GPRS Tracker – Big



007 - GSM / GPRS Tracker – Big



Specifications: Vehicle Car GPS GPRS GSM Tracker 104 with Built-in Battery Alarm Anti-theft.

- The product is intended for fleet tracking, field force automation or personal location tracking. Would you like to...
- View the whereabouts of your entire fleet from your desktop?
- Know the closest vehicle or technician to the next job site?
- Access yesterday's detailed route history for every vehicle in your fleet?
- Want to protect your Nokia device against theft?
- With a system based on Krish GSM Tracker, you can!

Item Includes: 1 * GPS tracker // 1 * AC adapter (US plug) // 1 * Light car adapter // 1 * GSM antenna (3 meters) // 1 * GPS antenna (3 meters) // 1 * Relay (12V/40A to 24V/40A according to vehicles) // 1 * Harness (4 Pin) 1 * Waterproof bag // 1 * User manual // 1 * CD with software

007 - GSM / GPRS Tracker – Big



Features:

Waterproof shell.

Built-in battery with large capacity 6000mA, 60 days long standby time.

Powerful magnets to absorb to the vehicle firmly.

Real-time tracking, retrieve lost vehicles, cargoes.

GPS/GSM station positioning.

SMS/GPRS/internet network data transfer (GPRS/Internet instructions in CD enclosed).

Point-to-point, point to group, group-to-group monitoring.

Continuously auto track upon different time and distance intervals.

Absolute street address with GSM network.

Maximum 5 cell phone numbers are allowed to admin the tracker.

Other functions: SOS, Geo-fence, movement alarm, over speed alarm, accident alarm, voice monitoring etc.

Cut off the oil and power system.

The on-line web page tracking software has one month free trial, after that it is about 10USD per year.

Waterproof bag included.

Notice: please be very careful when install the SIM card. Make sure the SIM card goes to the right slot.

007 - GSM / GPRS Tracker – Big



Type	Gps Tracker
Use	Automotive
Screen Size	gprs online with google map
Function	GPS Tracking
Model Number	104
Frequence	850/900/1800/1900Mhz or 900/1800/1900Mhz
Battery	6000mA/h Polymer battery
standby	60 days
powerful magnet	support




007 – GSM / GPRS Tracker

—
Big

Content	Specifications	
Network	GSM/GPRS	
Band	850/900/1800/1900Mhz	
GSM/GPRS module	SIM900B	
GPS module	SIRF3 chip	
GPS sensitivity	-159dBm	
GPS accuracy	5m	
GPS start time	Cold status 45s Warm status 35s Hot status 1s	
Voltage of car power system	12V ~ 24V	
Operating Current	Sleep current	4mA ± 1mA
	GSM operating current	54mA ± 3mA
	GPRS current (data transfer)	60mA ± 5mA
Battery	3.7V 6000mAh polymer battery	
Charge current	1.2 ± 0.2A	
Charge time	5h	
Standby time	GSM sleep mode, 1500h	
Storage Temperature	-40°C to +85°C	
Operation Temperature	-20°C to +65°C	
Humidity	5% ~ 95% non-condensing	
Item size	9.5 * 6 * 4cm (3.7 * 2.4 * 1.6in)	
Item weight	330g/11.6oz	
Package size	19.5 * 12.8 * 5.8cm (7.7 * 5 * 2.3in)	
Package weight	881g/1.9Lbs	

008 – GSM Tracker – N 12.

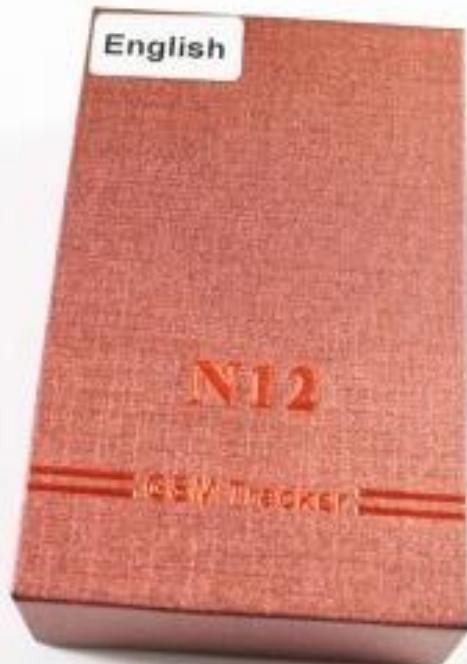

Mini GPS Tracker N12 Mini Collar SOS Waterproof GSM GPRS WiFi Locator for Kids Pet Cat Dog Bag Bike Car Tracking.

1. Introduction:

- This product adopts the latest intelligent seven-base-station positioning system and can realize more accurate and faster positioning than traditional single-base-station and three-base-station system.
- With the latest V3 google map, it supports the application in most countries.
- Other features of it include voice-controlled alarm, compact size, clear voice, long standby time, stable performance and easy installation.
- It is mainly used for home monitoring, regulation, and supervision of children, the aged and pets, anti-theft tracking of automobiles and warehouses, etc.

008 – GSM Tracker – N 12.



2. Technical parameters:

- GSM frequency band: 900/1800/1900.
- GPRS: Upload60, TCP/IP.
- Operating voltage: 3.4-4.2V DC.
- Standby current: ≈2.5 mA.
- Voice control enabling current: ≈30mA.
- Holding current: ≈150mA.
- GSM positioning time: 35 seconds.
- Temperature of working environment: -20°C ~ +50°C.
- Humidity of working environment: 20%~80%RH.
- Dimension: 41(L)X23(W)X14.5(H)mm.

3. Description of charging indicator:

When the host is being charged, its indicator will flash; when it is fully charged, its indicator will stay on. (Requirement of charger: 5.0V, current≤2000mA, Apple charger and Samsung charger workable).

008 – GSM Tracker – N 12.



4. Operating instructions:

•4.1 Startup

Open the small cover on the device and insert SIM card into the holder; the device will be started automatically. The indicator will flash for a few seconds during the startup process. Reinstall the small cover after the indicator goes out before you can use it.

Note:

Please use SIM card with good 2G-GSM network signal
Call identification needs to be enabled for terminal SIM card

GPS function needs to be enabled for terminal SIM card
PIN code of terminal SIM card is in an off state.

4.2 Setting of master number

Dial the SIM card number in the device with your mobile phone. After connected and listening to the sound around for 15 seconds or so, your mobile phone will get a message ring "master number set successfully"; then you just need to hang up the phone. If the message "master number set successfully" is not received, the setting of master number fails.

•4.3 Restore factory settings

When the terminal doesn't work properly due to incorrect setting of parameters, you can try to send an instruction message to restore its parameters to default factory settings to make the terminal resume normal operation.

The instruction for restoring factory settings is factory#

When the terminal receives this instruction, its setting parameters will be restored to the default factory values, and all the values set manually before this will disappear (number of the service center, etc. will also disappear).

If the terminal is successfully restored to factory settings, a message "factory settings restored successfully" will be received.

4.4 Query of network link location by message

When you need to query the network link location information of the terminal device, you can send "url#" to the SIM card of the terminal device, and the terminal will reply the location information of the network link positioned at the last time.

Instruction: url#

Example of reply to location query message:

battery=100%,http://minigps.net/loc.do?x=012743&y=10081&z=0025642battery=100%,http://minigps.net/loc.do?
x=012743&y=10081&z=002564251&n=0&c=460&a=10136&e=4272&s=21&v=m1.0&l=ch_ZN&p=351&n=0&c=460&a=10136&e=4272&s=21&v=m1.0&l=ch_ZN&p=3

4.5 Platform query

Note: to use this function, be sure to set GPRS parameters first (see 4.11).

Web, Apple and Android query is supported, open the url _____; group users please select account to log in, and individual users please select ID number to log in. Enter the password, and you can check the operation on the service platform.

4.6 SOS setting and operation

4.6.1 Setting of SOS number

To set SOS number, you need to send the following message to add SOS number through the master number:

Example: set a specified number as the corresponding SOS number.

sos1,13412345678# means setting the first number

sos2,13512345678# means setting the second number

sos3,13612345678# means setting the third number

If SOS1 number is set successfully, the terminal will send back a message "the first SOS number set successfully!" in reply.

4.6.2 Delete SOS number

If you want to delete a specific number, you can send a message of instruction to delete the serial number corresponding to the specific number to delete such number.

sos1,d# means to delete the first phone number

sos2,d# means to delete the second phone number

sos3,d# means to delete the third phone number

4.6.3 SOS operation

When you need help in an emergency, you can press SOS key to trigger SOS alarm. Such alarm will be sent to the preset SOS numbers by telephone, and if there is no answer when the SOS numbers are dialed cyclically, two cycles of dialing can be made at most.

Note: to realize SOS alarm function, you need to set SOS numbers first!

4.7 Setting of time interval for GPRS transmission of positioning data

Default time interval for GPRS transmission of positioning data of the terminal is 300 seconds, that is, the terminal uploads one piece of positioning data to the platform server every 300 seconds. If you want to set the time interval for GPRS transmission of positioning data, you can edit and send GPRS timing setting instruction.

Instruction format: upload, time interval (second) #

Setting range of time interval: 60-180000 seconds

Example: upload,60#

The example indicates that the time interval for GPRS transmission of positioning data is 60 seconds, that is, the terminal uploads one piece of positioning data to the backstage server every 60 seconds.

If the time interval is set successfully, a message "uploading interval set successfully! the interval is '60'" will be sent back.

4.8 Voice-controlled remote switch

Note: voice control is in a disabled state by default

4.8.1 Send a message "1111" to the SIM card number of the device with your mobile phone. After the message is sent successfully, the voice control function will be enabled.

Voice control enabling instruction: 1111

If voice control enabling is set successfully, a message "voice control enabling set successfully" will be sent back in reply.

4.8.2 Send a message "0000" to the SIM card number of the device with your mobile phone. After the message is sent successfully, the voice control function will be disabled.

Voice control disabling instruction: 0000

If voice control disabling is set successfully, a message "voice control disabling set successfully" will be sent back in reply.

4.9 Setting of voice control sensitivity

When you are not satisfied with the voice control sensitivity of the device, you can send a message to adjust it. When the device is delivered from factory, its voice control sensitivity is 83 by default.

Instruction format: level, sensitivity value#

Setting range of sensitivity value: 30-100; the larger the sensitivity value, the higher the voice control sensitivity.

Example: level,83#

The example indicates that the voice control sensitivity of the device is set as 83.

If voice control sensitivity is set successfully, a message "voice control sensitivity set successfully; the sensitivity is 83" will be sent back in reply.

4.10 Terminal restart function

When the terminal works abnormally, for example, the terminal doesn't position, you can send an instruction message to it to make the terminal perform remote restart and resume normal operation.

Instruction for setting remote restart of the terminal: reset#

When the terminal receives this instruction, it will restart immediately.

If terminal restart is set successfully, a message "restarted successfully" will be send back in reply.

4.11 Setting of GPRS parameters

When delivered from factory, the device already contains the GPRS parameters of GSM of most countries; when your device doesn't position, please set the GPRS parameters of the GSM card used by your device manually.

4.11.1 Setting of APN

Different GSM operators in different countries have different APN. Please consult local telecommunication operators for the APN of the SIM card you use.

Instruction format: apn, network name#

Example: apn,cmwap#

In the example, cmwap represents the APN of CMCC operator.

If APN is set successfully, a message "APN set successfully" will be sent back in reply.

4.11.2 Setting of user name and password for GPRS login

In most countries, user name and password can be omitted when logging in GPRS, so this setting step can be skipped. For countries where user name and password need to be used, you should set as follows.

Instruction format apn, network name, user name, pd, password#

Example: apn,cmwap,user,yidong,pd,123#

In the example, "yidong" represents the user name, and "123" represents the password.

If user name and password for GPRS login is set successfully, a message "GPRS user name and password set successfully" will be sent back in reply.

4.12 Setting of language and time

The terminal provides display in two languages, Chinese and English, and the time in different regions is set according to the time zone.

Instruction format: lang,x,zone,n#

x is language option, 0 is English, 1 is Chinese, n is time zone option, Eighth Eastern Zone is 8, and Third Western Zone is -3.

Example: lang,1,zone,8#

In the example, "1" indicates Chinese, and "8" indicates Eighth Eastern Zone China time. If the time in the country you are located is negative, you should send "lang,0,zone,-8".

4.13 Querying parameters

When you need to query the parameter setting status of the terminal device, you can write and send message "param #" to the SIM card number of the terminal device, and the terminal will send back the corresponding parameter query contents in reply.

Example: param#

Example of contents in the reply message:

imei:386201209006236

apn:cmwap

IP:usa.gpsjm.com:8500

UPLOAD:1800

CENTER:12345678901

LEVEL:80

LANG:EN

ZONE:E8

4.14 Check version number of software

Check the software version of the current device

Instruction: verno#

Example of contents in the reply message: N12-V1.0 2016/07/20 18:00

5. Notes

- * A new device should be fully charged before use so as to achieve the best effect.
- * Standard configuration of the charger: ±5.0V, 500-2000MA, to avoid damage to the host.
- * During installation, please pay attention to the intensity of GSM network signal; never install it in places where there is no signal or weak signal, so as not to influence the use effect or cause failure of use.
- * When the indicator is off, it means the battery is used up; in this case, charge it before use.
- * If you can't get through the phone, please re-insert the card and restart the device, or test after charging.
- * If the device doesn't answer automatically, re-insert the card and restart the device.

013-C - Jammer – 8 Antenna



High Power Eco-Friendly Eight Bands Jammer. 8 Antennas Portable Sensitivity Jammer for RC / GPS / WiFi / 3 G / 4 G , 8 Antenna Mobile Phone Signal Isolator Stationary 8Bands Jammer

013-C - Jammer - 8 Antenna



Brief Description:

This Jammer Can Adjust Block Range Is Best Using In Rooms Or Vehicles. X8plus Can Jamming All Types Of Wireless Devices, Such As Mobile Phones, Walkie-talkie GPS Tracker, Lojack, Wi-fi / Bluetooth Etc. Create A "Prohibited" Area With A Radius Of 50 Meters For All Wireless Devices, In The Coverage Area. They Will Not Be Able To Send Messages, Answer Calls And They Will Lose The Ability To Access The Internet. Equiped With 12V Car Charger, So It Is Very Convenient For Using On Vehicles Too.

Features:

- * Adjustable working range you can avoid blocking adjacent areas.
- * Friendly use and maintenance.
- * 8 bands of coverage to jam UHF /VHF or GpsL1 L2 or Lojack or Remote Control 433 315 868 MHz.
- * 24 / 7 hours working, Could continue to work.
- * Good cooling system with unique case as big heat sink and 3 fans inside.
- * Portability: Vehicular power cable included Could be used in Vehicle directly jamming car bomb.

Applicable place:

It can be applied in a meeting room, conference room, museum, gallery, theater, concert hall, church, temple, restaurant, classroom, training center, factory, bank, train, car, bus etc.

Specification:

Total Output Power: 18 Watt.

Output power Adjustable could adjust the jamming range Cover Radius: 10 – 50 m (under Signal level \leq - 85 dBm) @ according to the signal density mobile network.

Jamming type: Sweep Jamming.

Antenna Type: 3dBi external omni-directional.

Power Supply: AC adapter (50 to 60Hz/100 to 240V AC -DC12V) and 12V car charger.

Electric Filed (SAR): Compatible with ICNIRP Standards (Human safe).

Operating Temp: - 20 to + 50 ° C.

Storage Temp: - 40 to + 60 ° C.

Humidity: 5 % - 80 %.

Dimension(LXWXH): 355 x 140x 51 mm not include antennas.

Inner box dimension: 450 x 240 x 90 mm.

Weight: 4kg

1. Notices: Making sure all antennas fixed correctly before turn on. Don't taking off antenna when in the working condition.
2. The jammer shall be installed in the position with good ventilation. And large-scale things shall be avoided to ensure to the shielding effect.
3. When use the jammer outdoors, preventing water shall be taken into consideration.
4. Antenna shall be used vertical to the ground.
5. If you used in car, please make sure the car output adapter is DC12V, this device only can be working on DC 12 V, Not DC 24 V.

DETAILS:

CDMA / GSM / 3G 2100 MHz / 4G LTE Cell phone / Wi – Fi / Bluetooth / Walkie – Talkie. America Type frequency for United States, Canada, Mexico, S. America.

1. **2G GSM 850 MHz:** 850 – 894 MHz; 3W (GSM / CDMA).
2. **2G GSM 1900 MHz:** 1920 - 1990 MHz; 2W (2G GSM / CDMA / PCS 1900 MHz).
3. **4G LTE 700 MHz:** 700 - 800 MHz; 3W.
4. **3G 2100 MHz:** 2100 – 2170 MHz; 2W (3G UMTS / WCDMA / TD – SCDMA / CDMA).
5. **Wi-Fi / Bluetooth 2.4 G:** 2400 – 2500 MHz; 2W.
6. **4G Wi MAX / 4G LTE 2600 MHz:** 2500 – 2700 MHz; 2W.
7. **VHF Radio:** 135 – 175 MHz; 2W.
8. **UHF Radio:** 400 - 470 MHz; 2W.

Total Output Power: 18 W.

Europe Type frequency for Europe, Asia, Australia, Middle East, Africa.

1. **GSM 900 MHz:** 925 – 960 MHz; 3W.
2. **GSM 1800 MHz:** 1805 – 1880 MHz; 2W (GSM / DCS / CDMA1800 MHz).
3. **4G LTE 700 MHz:** 790 – 821 MHz; 3W.
4. **3G 2100 MHz:** 2100 – 2170 MHz; 2W (3G UMTS / WCDMA / TD – SCDMA / CDMA).
5. **Wi-Fi / Bluetooth 2.4G:** 2400 – 2500 MHz; 2W.
6. **4G Wi MAX / 4G LTE:** 2620 – 2690 MHz; 2W.
7. **VHF Radio:** 135 – 175 MHz; 2W.
8. **UHF Radio:** 400 – 470 MHz; 2W.

Total Output Power: 18 W.

CDMA / GSM / 3G 2100 MHz / 4G LTE Cell phone / Wi Fi 2.4 G / Bluetooth / GPS / Glonass / Galileo L1 - L2.

America Type frequency for United States, Canada, Mexico ,S. America.

1. **GSM 850 MHz:** 850 – 894 MHz; 3W (GSM / CDMA)
2. **GSM 1900 MHz:** 1920 - 1990 MHz; 2W (2G GSM / CDMA / PCS 1900 MHz)
3. **4G LTE 700 MHz:** 700 – 800 MHz; 3W
4. **3G 2100 MHz:** 2100 – 2170 MHz; 2W (3G UMTS / WCDMA / TD – SCDMA / CDMA)
5. **Wi-Fi / Bluetooth 2.4G:** 2400 – 2500 MHz; 2W
6. **4G Wi MAX / 4G LTE:** 2500 – 2700 MHz; 2W
7. **GPS / Glonass / GALILEOL 1:** 1570 – 1620 MHz; 2W
8. **GPS / Glonass / GALILEOL 2:** 1200 – 2300 MHz; 2W

Total Output Power: 18W

Europe Type frequency for Europe, Asia, Australia, Middle East, Africa.

- 1. GSM 900 MHz:** 925 – 960 MHz; 3W
 - 2. 2G GSM 1800 MHz:** 1805 – 1880 MHz; 2W
 - 3. 4G LTE 700 MHz:** 790 – 821 MHz; 3W
 - 4. 3G 2100 MHz:** 2100 – 2170 MHz; 2W (3G UMTS / WCDMA / TD – SCDMA / CDMA)
 - 5. Wi-Fi / Bluetooth 2.4 G:** 2400 – 2500 MHz; 2W
 - 6. 4G Wi Max / 4G LTE 2600 MHz:** 2500 – 2700 MHz; 2W
 - 7. GPS / Glonass / GALILEO L1:** 1570 – 1620 MHz; 2W
 - 8. GPS / Glonass / GALILEO L2:** 1200 – 1300 MHz;
- Total Output Power: 18W**

We could supply customized service by your detail requirements about frequencies setting.

Optional Frequency:

1. **Lojack:** 173.03 Mhz;
2. **CDMA 450 Mhz:** 430 – 450 / 460 – 470 Mhz;
3. **Gps / Glonass / Galileo:** L1, L2, L3, L4, L5.
4. **Wireless Camera:** 1.2 G, 2.4 G, 5.8g
5. **Car Remote Control:** 433 Mhz, 315 Mhz, 868 Mhz, 920 – 965 Mhz
6. **SAT Satellite Phones:** 1520 – 1670 Mhz;

Optional Function: Remote Control On/Off (3-5m).

Package Contents:

- 1 pcs Signal Jammer.
- 1 pcs AC Charger.
- 1 pcs Car Charger.
- 8 pcs Antenna.

015 - Jammer - GLOBE

EST-808SD painting cellphone jammer(big) 地球仪 (小)



Working Area(适用场所):

学校、会议室、礼堂、法庭、图书馆等禁止拨打手机的场所

1. Conference room, auditoriums, law court, library, exam room, school, cinema, theater, and hospital etc.
2. At places where using mobile phones is prohibited such as government, military, finance, security, police and command center etc.

Technology index (技术性能) :

Output port	Frequency	Average out-putting power	Channel out-putting power
CDMA	870-894MHz	33dBm	6dBm/30KHz(min)
GSM	930-960MHz	33dBm	3dBm/30KHz(min)
DCS	1805-1850MHz	33dBm	5dBm/30KHz(min)
PHS	1900-1990MHz	33dBm	4dBm/30KHz(min)
3G	2100-2200MHz	33dBm	3dBm/30KHz(min)

Power supply: AC adapter (AC110V-DC5V)

Semidiameter of interception: 1-15 m (-75dBm) Remote control: 5-10 m

Power consume: 3W weight: 0.45kg Dimension: 200(L) × 200 (W) × 290(H) mm

015 - Jammer - GLOBE



※ Product introduction ※

808 SD globe mobile phone signal shielding device is a small field place that is mainly used for domestic and foreign special security needs and security, such as private boss, confidential office, negotiation room, etc. according to foreign advanced technology.

A highly developed high-tech product that blocks GSM / CDMA / DCS / PHS / 3 G wireless transmission signals within a radius of 1 to 15 meters (usually about 5-100 square meters), making it impossible for mobile phones in the area to communicate. It does not interfere with the operation of other electronic devices in the environment.

015 - Jammer - GLOBE

※ Features ※

1. Shield GSM / CDMA / DCS / PHS / 3G mobile phone signals.
2. The ball is made of PVC once, and the base of the bracket is ABS material sphere. There are many languages to choose from.
- 3, the total transmission power of 2.4W
- 4, the effective shielding distance is adjustable from 1 to 15 meters (adjusted according to customer requirements before leaving the factory).
- 5, beautiful appearance, hidden.
- 6, low power consumption, no harm to the human body and environmental protection.
- 7, remote control operation, remote control distance 3-5 meters.



※ Applicable place ※

1. Special places that require safety and confidentiality.
- 2, private boss office, confidential office, negotiation room.
3. Small or temporary meeting rooms of party and government organs and enterprises
4. Personal or business special needs.

※ Services ※

Replacement within one year, repair within three years.

015 - Jammer - GLOBE



Types of	Output port	Blocking frequency	Shield radius
808 SD Type	CDMA/GSM	860-970 MHz	1-15 M
	3G	2110 - 2170MHz	Depending on the mobile operator's network status.
	DCS/PHS	1805-1930 MHz	
Power supply : AC110~250V Weight : 450g.			
Power consumption : 0.4W / h size (length × width × height) : 200 × 200 × 290 mm.			
Actual Signal: all mobile phone signals.			

016 – Jammer–Picture Frame



※Product introduction※

808 SB mural-type mobile phone signal shielding device is a high-tech product developed by our factory using advanced foreign technology and for the continuous development of communication system. According to the actual situation of foreign mobile communication, it can be at a radius of 1-15 meters (about 10- 150 square meters, the shielding range can be adjusted according to the required location. The **GSM / CDMA / AMPS / DCS / PHS / 3 G** mobile phone signal and walkie-talkie are cut off, so that the mobile phone cannot be played and answered, and the short message cannot be sent or received, but it will not interfere. Other electronic equipment works to ensure the safety of the required place. When the mobile phone leaves the partition, it can resume normal use without any damage to the human body.

016 – Jammer–Picture Frame

※Features※

- 1, Beautiful and humanized.
- 2, 3G / GSM / CDMA / DCS / PHS shielding five-way frequency band (can also be customized according to customer needs).
- 3, Can work 24 hours a day.
- 4, The transmission power 5W.
- 5, Effective shielding distance 1-15 meters adjustable (factory debugging before delivery)
- 6, Remote control switch.

※Applicable place ※

Small meeting rooms, concert halls, cafes, theaters, libraries, auditoriums, churches, museums, restaurants, clubs, hospitals, etc.

※Installation notes※

- This product can be directly fixed to the wall with screws. The surface temperature of the product can reach 50 °C, so please keep away from low heat resistant objects.
- Installation height: 1.0-2.0 meters best.
- Installation direction: please try not to point the mural to the direction of the mobile phone base station, otherwise it will affect the use effect.
- Power connection: connect the power plug on the back of the mural to the ac220v power supply.



016 – Jammer–Picture Frame

Serial Number	Technical Standard	Technical Parameter	
1	CDMA Band Transmission Frequency	869 – 894 mhz.	
2	GSM Band Transmission Frequency	925-960 mhz.	
3	DCS Band Transmission Frequency	1805-1880 mhz.	
4	PHS Band Transmission Frequency	1900-1990 mhz.	
5	3 G Band Transmission Frequency	2100-2170 Mhz.	
5	Power Supply	Power Input AC160V-240V Output DC 5V.	
6	Frame Size (Mm)	550 (L) × 460 (W) × 70 (H).	
7	Oil Painting Size (Mm)	50 (L) × 40 (W) Can Be Customized According To Your Own Preferences.	
8	Weight	About 2500 Grams.	
9	Isolation Range	1-15 Meters (About 10-150 Square Meters, The Shielding Range Can Be Adjusted According To The Required Place).	
10	Can Play Mobile Phone Type	3 G / 139 / 138 / 137 / 136 / 135 / 133 / 131 / 130 / PHS, Etc.	
11	Use Ring Environment Condition	Temperature	-10 To - 55° C.
		Relative Humidity	≤ 90% (Rh).
		Atmospheric Pressure	86 – 106 kpa.
		Position	Indoors.
12	Transmitting Power Per Channel	1 w ± 200 ma.	

016 – Jammer Picture Frame



Parameter

Detection range: 1~25 meter (part of GSM signal detection range can be up to 100 meters)
Shielding range: 1~50 meter (-75dBm, depending on the distance of base station)
Detection/shielding signal type: GSM, CDMA, DCS(Mobile/Unicom 1800M/1900M)
3G(TD/CDMA2000/WCDMA),4G(2.3G/2.6G), 2.4G(Bluetooth, Wi-Fi)

Increasable signal type: band can be customized according to requirements

Frequency channel: at most 7 I/O channels(detection/shielding), support all current common band phone mode

Features

Beautify: photo-frame style, photo can be selected as application field required;
Intelligent detection and shielding: shielding function activated smartly, environmentally friendly;
PC management: support RS232 communication port, controlled by computer;
Shielding range adjustable: adjust output power of each band (shielding coverage range) through connected with computer;
Detection range adjustable: 30 grades detection range optional;
Remote switch: infrared remote control available to on/off the device in a range of 0~10 meters;
Built-in antenna: built-in directional antenna make shielding area more accurate, highly hidden performance;
Work indication: LED show the activated state and indicate the current time;
Band indication: with separate detecting and shielding LED for each band (Blue light for detection, and red light for shielding);

Fitting



Host

AC power line

RS232 serial line

Remote

016 – Jammer–Picture Frame

Photo-Frame Style
Smart Signal Jammer



Product Information:

Using a new photo-frame design, has a very high hidden performance. Able to jamming all cell phone signals, allowing you to enjoy a quiet moment

Product Features:

- 1.Photo Frame Design, has a strong hidden performance
- 2.Output power of each band can be adjusted by knob and jamming range can be regulated.
- wireless remote control available to ON/OFF the device in a range of 10 meters
- 3.It can be looked completely like a photo frame hung on the wall
- 4.Each band has a separate switch and has LED display light

016 – Jammer–Picture Frame



Application:

This Jammers can be used for signal detection and jamming, such as Churchs, Courts, Theaters, Office, Libraries, Museums, Prisons and so on.

Precautions:

- 1.The jammers are customized according to the frequency bands of different countries, please confirm that the purchase country and the actual use country are consistent. Otherwise it can not be used. Please read the jammer function before purchasing.
- 2.If the low power jammers(such as handheld jammers) to blocker high power signal device(such as high-power WIFI router, Bluetooth audio equipment, etc.), the effect will be poor or even can not jammer.
- 3.It is forbidden to use while charging.
- 4.Do not use handheld jammers as desktop jammers.
- 5.Do not use jammers before connecting the antenna.

Technical Specifications

Parameter Name	Parameter Details
Model	IKPPL - 016
Jamming frequencies	CDMA 800: 869-894 MHz. GSM 900: 925-960 MHz. GSM 1800 / 4G LTE: 1805-1880 Mhz . 3G / CDMA 2000: 2110 – 2170 MHz. 4G / LTE 2300: 2300 – 2400 MHz. 3G / CDMA 2000: 2110 – 2170 MHz.
Jamming radius	Up to 50 meters.
Power supply	Used after connecting the power supply.
Total output power	15 W.
Voltage	110 / 220 AC.
Operating temperature	-20 to +70°C.
Operating humidity	5 % to 80 %.
Device size	660mm x 460mm x 78mm.
Device weight	2500 g.
Complete Accessories	Power Cable, wireless Remote Control.



TECHNOLOGY AT IT'S BEST !!!

EST-808SC Cigarette cellphone jammer (香烟型)



Working Area(适用场所):

私人老板办公室、机要办公室、洽谈室等特殊需要安全和保密的小型场所

1. small place which need special security
2. the personal office, conference room
3. in the vehicle, or other special place which need special protect
4. Government or company's small meeting room
5. For personal or business requirements

Technology index (技术性能) :

Output port	Frequency	Average out-putting power	Channel out-putting power
CDMA/GSM	870-970MHz	24dBm	3dBm/30KHz(min)
DCS/PHS	1805-1990MHz	24dBm	3dBm/30KHz(min)
3G	2100-2200MHz	24dBm	3dBm/30KHz(min)

Power supply: AC adapter (AC110V-DC5V)

Semidiameter of interception: 1-3 m (-75dBm)

Power consume: 400mW

weight: 100g

Dimension: 85(L)×50 (W)×23(H)mm

018 – Jammer – Mobile Cover



Product Description : Multi function Handset bag Anti-radiation , anti-degaussing, No signal. Available for handset, gps, digital camera, memory card

Specifications

New HANDSET FUNCTION BAG

Anti-radiation, anti-degaussing ,no signal

1)Carrying mobile phone long-term will endanger human due to wave radiation.

2)Phone bag have a great effect in anti-radiation to make sure health.

3)If you do not want to answer the phone, you can put the phone in the bag, then the phone will tell " calls can not be connected ".

4)Magnetism card, putting into the bag, can avoid magnetism lost and info. leak.

Skill dimension: attenuation intensity 90dB

Function efficiency:99.9%

CCTV Jammer



UV30 CCTV cameras, UHF, RFID, VHF Jammer

UV30 is a UHF VHF jammer that is used as the desktop solution for protection against low frequencies and wireless threats related to them. Among the threats it can prevent you will find CCTV cameras watching you every day on the streets of the city you live in, RFID chips which are placed into more and more devices these days, NFC technology that is embedded not only in many of our smartphones but also into lots of smart home systems along with RFID chips and remote control technologies. Low frequencies are also used by many communication devices like two-way radios, walkie-talkies and similar ones. These communication devices either can be eavesdropped or might impose threat by just working in the inappropriate time and place. UV30 is the right kind of device to be used against all those low frequencies and possible dangers due to their usage. It is a stationary device that can help you to protect any building from low frequencies, NFC signals and LoJack tracking as well.

CCTV Jammer



Features:

Works With Specific Spectrums From UHF And VHF Bands.
Four Antennas With Powerful Output.
Works Within 30 Meters Radius.
Improved Heat Loss Thanks To Aluminium Case And Fans.
Can Be Used In The Car With Power Inverter.
Desktop Device With No Battery Inside.

Specifications:

Frequencies Jammed: VHF 140mhz-180mhz, UHF 450mhz-480mhz.
Signal Power: 4 X 10w Bands, 40w Resulting Power.
Jamming Radius: 15-30 Meters.
Current Strength: 5a.
Power Adapter: Ac 110~250v 24vdc, 5000ma.
Sma Antennas: 4 X 3db, Isotropic.
Product Size Data: 213 X 170 X 51 Mm.
Jammer Weight: 1900g, Complete Package Weights 3kg.
Temperature Regime: 0c To 50c Degrees.
Air Humidity: 5% To 80% Allowed.

CCTV Jammer



UV-30 Can Completely Stop These Devices:

- Elusive Tracking Systems.
- Tv White Space.
- Absolute Software Laptop Lo-jack.

UV-30 Can Partially Stop These Devices:

- Broadcom BCM 4752.
- Texas Instruments Wi-link 8.0.

019 / 020 / 021 / 022 / 023 /024

Signal Repeater Details

Specifications:

A mobile phone signal repeater provides the ultimate solution in any area where cellular communications cannot work due to leak of signals. There is no interference. It could also improve indoor electromagnetism environments. Protract cellular battery life and reduce radiation of cellphones. A mobile repeaters are suitable for residential and office use. It is also excellent for cover a meeting room, hotel room, classroom etc. Help reduce drop calls and improve GSM voice communication quality.



TECHNOLOGY AT IT'S BEST !!!

Frequency Range	UpLink: 890-915Mhz. DownLink: 935-960Mhz.
Coverage Area	<u>2000 Meter SQUARE.</u>
Gain (dB)	UpLink Gp >=65 & DownLink Gp >=70
Export Power (PO)	>=27dBm
Pass Band Ripple	<=3 dB
I/O Impedance	50Ω/N connector
Noise Figure	<=4dB
Transmission Delay	<=0.5μs
Ambient Temp.	-10degrees -60degrees
Power Supply	AC110~220V 45~55Hz
Size & Reliability	220 x 140 x 40 mm
Electromagnetic Compatibility	To the ETS300 694-4 standard
Function	a) Power supply LED denote b) Export power LED denote

019 / 020 / 021 / 022 / 023 /024 Signal Repeater Details :

Installation Approaches: Fix up outdoor antenna reception on housetop and point to signal tower. Connect outdoor antenna to "outdoor" port in repeater machine through cable. Connect indoor antenna to "indoor" port in repeater machine through cable also. Plug

Technique Supporting: If still no signal receipt after activated repeater, please check if outdoor antenna point to signal tower or elsewhere have strong signal and check if strength achieve. Please adjust the direction of outdoor antenna if it cannot call out. If strength is not steady, please check if outdoor and indoor antenna are too close. Please ensure the outdoor and indoor antenna have distance of 20 meters at least ,with a wall between and net a same horizontal line.

NOTE: The distance between the outdoor antenna and the amplifier is not more than 30 meters. The outdoor Antenna not close to a large antenna, high-voltage lines, transformers, or metal mesh, etc. The distance between the indoor antenna and the amplifier is not more than 40 meters. The indoor antennas do not close to the wall as far as possible in order to increase the coverage area. The indoor antenna and the outdoor antenna are advised to stay away from each other for more than one floor distance to prevent cyclic signal amplification. If lack of communication quality, please change the installation position of the outdoor antenna and adjustment the indicate direction of antenna. It is best to enclose waterproof tape at the junction, and prevent moisture narrow the indoor signal coverage area. Try to straight the cable, do not bend more than 90 degree.

Booster GSM980:



Product Name: UP to 2000square Meter
GSM980 900MHZ Mobile Phone Signal
Amplifier RF Signal Repeater booster

Category: Cell Phone Signal Boosters

Short Description: Cable + Antenna
2000square Meter GSM980 900MHZ
Mobile Phone Signal Amplifier RF Signal
Repeater Booster .

2 Band Booster GSM / UMTS 980:




Item	Specification	
Model No.	GSM/DCS980	GSM/UMTS980
Item description	900MHz/1800MHz GSM/DCS Repeater	900MHz/2100MHz GSM/UMTS Repeater
Frequency	Uplink: 890-915MHz 1710-1785MHz Downlink: 935~960MHz 1805- 1880MHz	Uplink: 890-915MHz 1930~1990MHz Downlink: 935-960MHz 2110~2180MHz
Gain	Uplink Gp>=60dB; Downlink Gp>=65dB	Uplink Gp>=60dB; Downlink Gp>=65dB
Power	>=20dBm	>=20dBm
Flatness	<=3dB	<=3dB
Impedance	50 ohm/N	50 ohm/N
Noise factor	<=4dB	<=4dB
Transmission Delay	<=0.5μs	<=0.5μs
Operating Temperature	-10 ~60 C	
Power Supply	AC 110-220V	
Coverage	About 2000 Square Meters	About 2000 Square Meters

Tri Band Booster :



Frequency range	Uplink 890~915MHz / 1710-1785MHz / 1920-1990MHz Downlink 935~960MHz / 1805-1880MHz / 2110-2180MHz
Gain (dB)	Uplink Gp≥65 Downlink Gp≥70
Export power (Po)	Gp≥+20dBm Downlink Gp≥+24dBm
Pass band ripple	≤3dB
I/O impedance	50Ω/N connector
Noise figure	≤4dB
Transmission Delay	≤0.5μs
Ambient temperature	-10°C~60°C
Power supply	AC110~220V 45~55Hz
Size	220 x 180 x 20 mm
Reliability	To the GB6993-86 standard
Electromagnetic compatibility	To the ETS300 694-4 standard
Function	a) Power supply LED denote b) Export power LED denote
coverage area	2000 m ²

Booster Installation Details

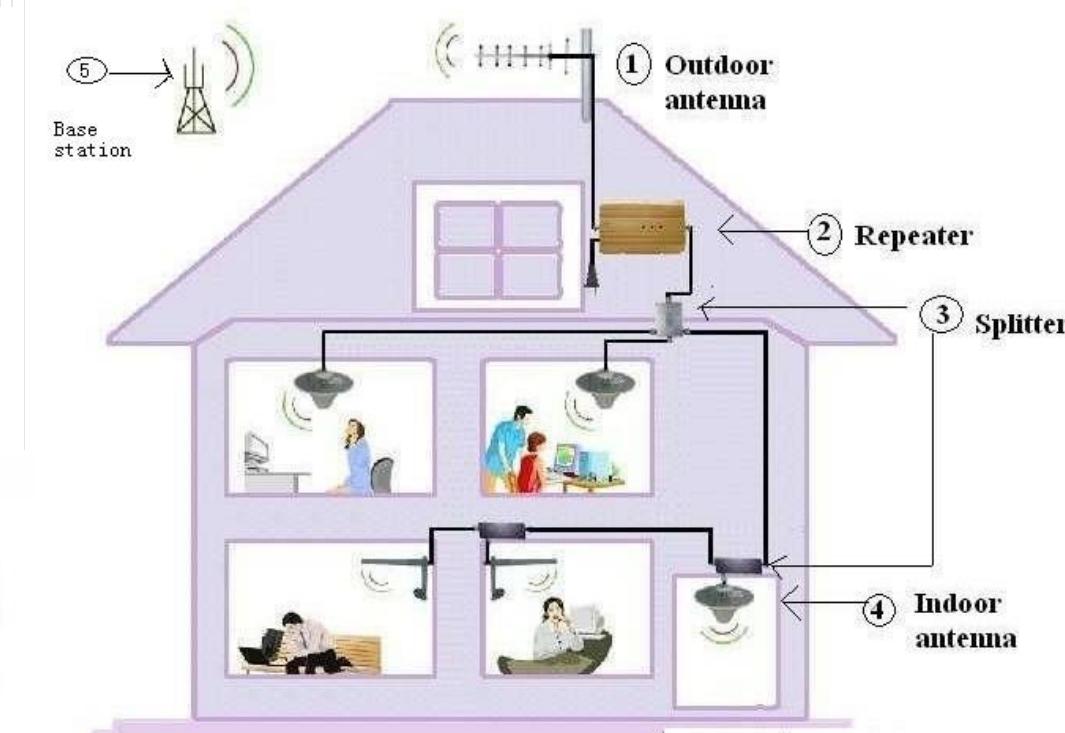

028 - Vehicle Black Box

Product Description : HD Portable Car Black Box DVR with GPS Logger and G-Sensor

All you need for recording video in a car! Not only does it record video, but it is also a GPS Logger. Playback on a PC with provided software allows the user to view recorded video simultaneously with GPS data including the date, time and location of the vehicle. This device's unique sensors detect speed, breaking, acceleration and activate recording so you will be sure to capture all important events while driving. With **Accident and Event activated recording**, you will never be left wondering "what just happened?" because it's all on tape. This device is perfect for insurance purposes, teenage drivers, police officers, professional drivers, and anyone who would like to increase their car security and monitor what really happened in the car. **Hot Points** Record high-quality video and audio data for 360 seconds before and after any accident. Store hours of video, reviewable anytime on removable SD card. G-Sensor apparatus and GPS capable of automatic recording. GPS tracking for logging and reviewing your route. Built-in software integrates functionality of google maps and G-Sensor apparatus. Configured for easy manual operation and anytime recording. 1.3 Mega Pixel CMOS Camera Records Audio And Video with its **High Definition Camera**, Real Time Video recording, GPS Location information, logged, Emergency button for manually recording video, & **Micro SD Card support to 32GB...**

Specification : Imaging Sensor: 1/5 -Inch color CMOS // Video Resolution: 656 x 488 // Video Angle: 102 degree // Video Format: ASF // Minimum illumination: 0.1 Lux // Operating System: Support Windows XP/Vista // SD Card: Support 512MB-32GB // **GPS/Google/Maps: Supported** // Pre-event Recording Duration: 2 - 60 seconds (adjustable) // Post-event Recording Duration: 10-300 seconds (adjustable) // Recording Mode: Auto mode by shock sensor/Manual mode by manual recording button // Power Supply: 5V // Consumption Current(Max): 550mA.



028 - Vehicle Black Box DVR



028 - Vehicle Black Box DVR



TECHNOLOGY AT IT'S BEST !!!

028 - Vehicle Black Box DVR



028 - Vehicle Black Box DVR

FEATURES:

6.86-inch Split view Touch Screen Display

This dvr support 2 Split view screen display. GPS navigation and video recording will be display simultaneously on the 6.86inch screen. It also provides instant video playback. Prove your innocence in seconds whilst remaining on the road.

Record HD 1080P Video

Record HD Video in 1080P mode. 25mm Wide Angle front camera lens, capture all the action in crystal clear HD video. Video and audio are automatically recorded in an endless loop and saved in memory card. Record traffic incidents, scenic travel, unexpected moments or any social media worthy video.

Built-in Android 4.4 Operating System

Build in RAM1GB+ROM 16GB internal storage, there is about 0.8GB available for application installation, and about 12GB internal storage available for data storage.

028 - Vehicle Black Box DVR

Dual Cam Simultaneously Recording

This Car DVR has two cameras that allows for simultaneously recording videos from two different angles. Picture in Picture display will let you have clear view from front and back-up camera . When the car in Reversing Gear, this car dvr will automatically switch to the back-up camera image view with parking line.

Wi-Fi Connecting

If there is WiFi network available nearby, DVR with WiFi .

FM Transmitter function

When this car dvr sets up the same FM frequency as car radio (eg.87.9), dvr will output the audio via FM transmitter function to your car speaker.

Built in G-Shock Sensor

If a vehicle collision occurs, the build-in G-Shock sensor automatically locks the recorded video providing an accurate record of events.

One-Key Screen Sleep To Recover Rear-view Mirror

Press power-key will let display screen enter sleep mode, and then DVR will work as one normal car rear-view mirror.

Item specifics:

Item Type: Car DVR.

OSD Language: Chinese-Simplified, Turkish, Spanish, Russian, Italian, German, English, Polish, Portuguese.

Special Features: Microphone, Digital Zoom, Wifi Function, Led Display, Built in GPS, Time & Date Display, With Rear view Mirror, Cycle Recording, G-sensor, Cyclic Recording, Dual Lens.

Interface: USB2.0,WI-FI,Micro SD/TF.

Video Code: H.264.

Assembly Mode: Portable Recorder.

Number Of Lenses: 2.

GPS logger: Internal.

Battery Life: Connect car charger use.

Memory Card Required Reading Speed: Class 6

View angle: 140°

Max External Memory: 32G

Frames Per Second: 20

Systems: Android 4.4.2

FM transmitter: Yes

Dual lens: Yes

Touch screen: 6.86"Capacitive Touch screen Video chipset: A33 Quad core

Touch Screen: Yes.

Battery: Built-in.

Imaging Sensor: Portable Recorder.

Pixels: 1200 Mp.

Original Package: Yes.

Screen Ratio: 16:9

Camera Resolution: 1920 x 1080.

ROM: 16GB(System will occupy 3GB)

Video Format: MOV

Display Size: 6.86"

GPS Navigation: Yes

MP3/MP4 player: support

RAM:1GB

6.86" Android DVR GPS Navigation


Junsun A700

Rear View

Gravity sensor

Loop recording

Smart chip



6.86 inch
big screen




1080P HD
picture quality



Front and rear
dual record



F2.0 large aperture



Rear View



140° wide-angle



Gravity sensor



30 frames
per second



Loop recording



Smart chip

Car Mirror
Android
GPS
navigation
Full HD
1080 p
Rear view
Mirror with
two
Cameras
Vehicle
Black box
DVR video
recorder.

TECHNOLOGY AT IT'S BEST !!!

028 - Vehicle Black Box DVR



028 - Vehicle Black Box DVR



028 - Vehicle Black Box DVR

Are you experiencing similar problems?

Every time I drive all fear! ! !

ONLINE TRANSLATION SERVICES FREE INSTANT TRANSLATION AND THE WEBPAGE, THE TRANSLATOR, CHINESE (SIMPLIFIED), ALBANIA LANGUAGE, ARABIC, BAHASA ASIRBALUAN, BELARUS, BOSNIA, BOSNIAN, BELARUS,



Omnipresent party Pengci



Nasty scrape car party




Judge responsible for the accident

028 - Vehicle Black Box DVR

- 6.86-Inch Big Touch Screen
- GPS & Video display simultaneously
- Android 4.4+WiFi+FM Transmit
- RAM 1 GB +ROM 16GB
- Dual Camera Recording



028 - Vehicle Black Box DVR



1080P Video Recording

RAM 1GB +ROM 16GB

Dual Cam Simultaneously Record

Build in WiFi

Android 4.4 Systems

Offline GPS Navigation

6.86 inch IPS Touch Screen

FM Transmit

01

Record HD 1080P Video

Record HD Video in 1080P mode. 25mm Wide Angle front camera lens, capture all the action in crystal clear HD video. Video and audio are automatically recorded in an endless loop and saved in memory card. Record traffic incidents, scenic travel, unexpected moments or any social media worthy video.



Record HD Video in 1080P mode. 25mm Wide Angle front camera lens, capture all the action in crystal clear HD video. Video and audio are automatically recorded in an endless loop and saved in memory card. Record traffic incidents, scenic travel, unexpected moments or any social media worthy video.



Large aperture



140° wide-angle

Record HD Video in 1080P mode. 25mm Wide Angle front camera lens, capture all the action in crystal clear HD video. Video and audio are automatically recorded in an endless loop and saved in memory card. Record traffic incidents, scenic travel, unexpected moments or any social media worthy video.



03

Offline GPS Navigation

Navigate anywhere, without internet. Our navigation always works whether or not you have wireless coverage. You could download your favorite GPS navigation Map into DVR internal storage.



Navigation also shows the precise distance to each manoeuvre will guide you to your destination. If you miss a turn our smart algorithm will immediately recalculate to get you back on your way.

04

Dual Cam Simultaneously Recording

This Car DVR has two cameras that allows for simultaneously recording videos from two different angles. Picture in Picture display will let you have clear view from front and back-up camera . When the car in Reversing Gear, this car dvr will automatically switch to the back-up camera image view with parking line.



This Car DVR has two cameras that allows for simultaneously recording videos from two different angles. Picture in Picture display will let you have clear view from front and back-up camera . When the car in Reversing Gear, this car dvr will automatically switch to the back-up camera image view with parking line.

05

6.86-inch Split view Touch Screen Display

This dvr support 2 Split view screen display. GPS navigation and video recording will be display simultaneously on the 6.86-inch screen. It also provides instant video playback. Prove your innocence in seconds whilst remaining on the road. Moreover, you see a movie when you are free or waiting for some one to enjoy the seconds in the car.



This dvr support 2 Split view screen display. GPS navigation and video recording will be display simultaneously on the 6.86-inch screen. It also provides instant video playback. Prove your innocence in seconds whilst remaining on the road. Moreover, you see a movie when you are free or waiting for some one to enjoy the seconds in the car.

07

FM Transmitter function

When this car dvr sets up the same FM frequency as car radio(eg.87.9), dvr will output the audio,via FM transmitter function to your car speaker.



When this car dvr sets up the same FM frequency as car radio(eg.87.9), dvr will output the audio, via FM transmitter function to your car speaker.

08

Built in G-Shock Sensor

If the event of a vehicle collision, a built-in sensor to automatically lock G-SHOCK
Recorded video provides an accurate record of events.



**If the event of a vehicle collision, a built-in sensor to automatically lock G-SHOCK
Recorded video provides an accurate record of events.**

09

One-Key Screen Sleep To Recover Rearview Mirror

Press power-key will let display screen enter sleep mode, and then DVR will work as one normal car rearview mirror.



GPS Navigation map (Free upgrade)

beautiful 3D landmarks, buildings, parks and mountains, help you find your bearing in unfamiliar areas. Driving with Sygic GPS Navigation is both practical and enjoyable.





precise distance to each maneuver will guide you to your destination. If you miss a turn our smart algorithm will immediately recalculate to get you back on your way.

Premium: Head-up Display

At night, the info is projected directly into your line of sight - the windshield. Keep your attention on the road and enjoy a safe & comfortable drive at night.



The image displays the Sygic Premium mobile application interface. On the left, a vertical menu lists various features: Sygic, Navigate to..., Route, Sygic Store, Travel book, SOS / Help, My community, Settings, Exit, and Back. A sub-menu for 'Navigate to...' is open, listing: Address or POI, Home, Quick search, Nearby POI, POI on route, Favorites, History, and Contacts. At the bottom of this menu is a 'Back' button. On the right, a 'Manage maps' screen is shown, listing available map downloads for countries like the Czech Republic, Denmark, Estonia, Finland, France, Germany, Gibraltar, and Greece, each with its file size and download status (Available or Installed). The top right corner of the screen shows the device's battery level (3.6GB), signal strength, and the time (18:07).

Map	Size	Status
Czech republic	66.8MB	Available
Denmark	47.3MB	Available
Estonia	13.3MB	Available
Finland	101.2MB	Available
France	574.5MB	Available
Germany	593.0MB	Installed
Gibraltar	49kB	Available
Greece	68.9MB	Available





029 – Car Fuel Saver



Benefits of this car fuel saver :

1. Saves Car Fuel By 5 – 8 %.
2. Life Span Of The Engine Is Increased.
3. Removes NEGATIVE ions and increases fresh air.

029 – Car Fuel Saver

SPECIFICATIONS: ENERGY SAVING by 5-8% FOR PERTOL or DIESEL CARS.

Increases Life Span Of Engine. Negative Ion to fresh air. STABILISES VOLTAGE TOO.



General : This multi-purpose Voltage stabilizer with built in battery doctor system is the new revolutionary product for the automotive industries . Once you use this **fuel saver doctor**, your car is in best control , it will solve small problems that due to unstable voltage during driving thus resulted to saving fuel consumption and enhance the effectiveness of force (in general it can save fuel up to 8% to 15% efficiency, power upgrade more than 15% . What is more wonderful, it is so easy to installed, with just a plug into your cigarette-lighter socket, the device will be activated . Unlike other fuel saving product, by adding chemical and tablets into the fuel tank, which will increase the risk of car damages. **Fuel Saver Doctor :** Fuel Savings for Diesel & Petrol car , save fuel up to 5-8%. Up to 15% extra distance driving .Power by 12V Car. PLUG & Drive - No side effect on car. **Feature: Fuel Saver doctor :** •Stabilizer has the following two systems.

- Voltage Stabilizer System
- Battery Doctor system

Benefits: • Fuel saving • Better RPM response

- Increase engine torque • Engine power up • Optimized all electronic devices in car.

Advantages: Faster throttle response, engine power up. • Reduce car CPU noise signal, improve CPU reaction time, Improve electronic efficiency. • Smoother gear shift on automatic car. • Improve engine power, better acceleration response, hence improve fuel saving. • Maximize ignition efficiency, easier engine start. • Prolong engine and electrical device life-span. • Easy installation, totally DIY, the fist choice for ladies drivers. • Equipped with double fuse protection, for better product life and safety. • Faster RPM response, it gives you powerful acceleration even when you car's air condition turn on to maximum load. • Cleaner exhaust emission on HC and CO gas. So more environment friendly.

030 – Car Fuel Saver



HOW DOES IT WORK : Simply by dropping the Greentech Fuel Enhancer into the fuel tank to contact the fuel directly can change the aggregation of fuel molecules from larger clusters to smaller clusters or even single molecule by breaking the Van der Waals Force among the fuel molecules. The smaller molecule clusters expose a larger surface area for better combustion reaction and consequently leading to greater fuel efficiency and less emissions.

What results are available? Our patented technology has been verified by sending our products to California CEE, TUV Rheinland Group and SGS, all of whom confirmed and supported our research data of up to 15-26% savings on Gasoline vehicle and up to 13% savings on Diesel vehicle. Greentech Fuel Saving Devices can be fitted into all kinds of the vehicle with no need to modify the vehicle and will not affect the vehicle warranty.

Main parameters: **Enhance Horsepower** Greentech D11 Fuel Saving Device includes Greentech Molecule Enhancer and Air Refining Device. As long as the contact between fuel and Greentech Molecule Enhancer was established, the molecule enhancer can change the aggregation of molecules from larger molecule clusters to a smaller ones or even single molecule by breaking the Van der Waals force between the fuel molecules. Moreover, the Greentech Air Refining Device can purify the air and increase the oxygen level in the air by neutralizing the pollutant floating in the air such as dust, emissions, germs, pollen, tobacco smoke, moulds and all other species posses positive ions. The improvement of fuel and air can achieve the better combustion reaction in the engine to generate more horsepower and torque.

030 – Car Fuel Saver



LASTS FOR 10 YEARS :

Greentech Fuel Saving Device applies our patented Molecule Enhance Technology which takes advantage of physical phenomenon instead of chemical reaction; therefore, there is no chemical reaction and catalyst involved. None of the materials used will be consumed during the process. Because of the physical natural, many research reports suggest, our patented technology can last for a very long time, more than 10 years at least.

SPECIFICATIONS: **ENHANCES HORSE POWER:** G11 Fuel Saving Device includes Molecule Enhancer and Air Refining Device. As long as the contact between fuel and Greentech Molecule Enhancer was established, the molecule enhancer can change the aggregation of molecules from larger molecule clusters to a smaller ones or even single molecule by breaking the Van der Waals force between the fuel molecules. Moreover, the Greentech Air Refining Device can purify the air and increase the oxygen level in the air by neutralizing the pollutant floating in the air such as dust, emissions, germs, pollen, tobacco smoke, moulds and all other species posses' positive ions. The improvement of fuel and air can achieve the better combustion reaction to generate more horsepower and torque.

REDUCES FUEL CONSUMPTION : According to the lab research from Taipei Medical University, the surface tension of the fuel was decreased by contacted with Greentech Molecule Enhancer; causing the smaller droplets of the fuel after it was ejected from the nozzle. The smaller droplets, exposing larger surface area in the air, contact with oxygen for better combustion reaction, and hence, better fuel efficiency.

MINIMIZE EXHAUST EMISSIONS : The large molecule clusters of the fuel always cause the incomplete combustion and produce emissions such as carbon monoxide (CO), non-methane hydrocarbons (NMHC), hydrocarbons (HC), and nitrogen oxides (NOx). The Greentech Molecule Enhancer can change the aggregation of fuel molecules from large clusters to a single molecule by breaking the Van der Waals force between the fuel molecules. The smaller molecule clusters of the fuel can then achieve the complete combustion to reduce the exhaust emissions.

ENVIRONMENTAL FRIENDLY : Since 2000, we have been devoted to create the energy saving products and environmental friendly products. All the Greentech product materials are environmental friendly and conformed to the RoHS standard. By using Greentech Fuel Saving Device, not only can it reduce the fuel consumption, but also lower the exhaust emissions.

031 - Sim Card Reader



Detailed Product Description :

- 1) GSM SIM back-up tool.
- 2) Easy to read the phonebook of SIM card and save to PC.
- 3) Can write the phonebook saved in the PC to another new SIM card .
- 4) Read, edit, backup telephone directory and SMS.
- 5) Leisurely create, edit, backup mobile ring tones and pictures (only for nokia phone).
- 6) Suitable for those who have several SIM cards to backup and modify information.
- 7) Information safekeeping, set, cancel, manage mobile PIN password.
- 8) Supporting USB2.0 to read and write quickly.
- 9) Beautiful contour, no extra power, plug and play USB port.
- 10) System requirements: Windows 98, ME, 2000, XP.

033 – Car Bluetooth Hands Free Kit With Solar Charger

 **Bluetooth Handsfree Car Kit**



Specifications:

- 1, 0-10 meters away from the Bluetooth specification 2-0
- 2, complete Bluetooth wireless devices
- 3, USB interface, and software upgrades available for charge
- 4, solar charge
- 5, DSP full duplex call, the greatest degree of filtering noise, shielding echo
- 6, built-in 500mAh lithium battery, standby time of 5 days, 6 hours talk time
- 7, Built-in high sensitive microphone and powerful speaker
- 8, can check the last 20 groups 200 groups of phone calls and store numbers, the selected call-back
- 9, LCM display to show the English name and phone number
- 10, take / link / reject the phone, voice dialling, last number redial, call waiting.
- 11, also supports connection of two phones
- 12, phone book sync uploading

034 - Car Bluetooth With Multi Point Speakerphone

Specifications:



Advanced Built-in Microphone, with D.S.P. solution for Echo Cancellation & Noise Suppression // For your Home, Office, Car and anywhere you like without the hassle of putting on the earpiece // voices are crisp and clear // Multipoint Feature is for connecting with 2 mobile phones in the same time. // Big three buttons.

Bluetooth V1.2, Class 2, Working range of up to 10 Meters Bluetooth Profile Supported: Headset & Hands-Free Profiles Operating Frequency Band : 2.402 to 2.480GHz unlicensed ISM band Talk Time: Up to 4 hours~6 hours Standby Time: Up to 120 hours~160 hours Battery Charging Time: 3 hours Battery type: BL-5B replacement (any BL-5B nokia battery fits).

Package Includes:

- Bluetooth Speakerphone.
- Visor Clip.
- USB charging cable.
- Cigarette car adaptor.

TECHNOLOGY AT IT'S BEST !!!

035 - Car Mp3 FM Modulator With Car Bluetooth Hands Free Kit



Specifications:

- Bluetooth Hands-free Call.
- Call Line Identity.
- Echo Cancellation And Noise Removal.
- Stereo Bluetooth And Fm Emission Technique.
- Support Usb/Sd Card.
- Support Mp3 Format.
- Auto Power-off Memory.
- Power Supply From Car Cigar Lighter.
- 20 Key Remote Control For Operation.

037 - Car BlueTooth On Steering Wheel With Dial Pad



Specifications:

- 1 . Blue tooth 2.0 + EDR, Compatible with all Blue tooth enabled mobile phones.
2. Caller ID indicate with large LED light, support English name display.
3. Voice dial and last number redial.
4. Noise suppression and echo cancellation technology.
5. AVRCP profile integrated, control the audio playback when used with Blue tooth stereo mobile phone or Blue tooth USB dongle.
6. Built-in microphone and built-in dual stereo louder speaker.
7. Built-in FM frequency transmitter connect to your car stereo.
8. Universal audio input for audio devices, such as Ipods, MP3, MP4 to enjoy wireless stereo listening
9. Stereo earphone provided for total private conversation
10. FM earpiece is available
11. Select last 10 calls dial-back from Blue tooth mirror
12. Wireless parking sensor system is available
13. Easy installation, the mirror simply clips over the top of your existing mirror.