

REMOVAL

Fully slacken the drive chain.

Support the motorcycle using a safety stand or hoist, and raise the rear wheel off the ground.

Push the rear wheel forward.

Derail the drive chain [1] from the driven sprocket.

Remove the rear axle nut [2], washer [3] and right adjusting plate [4].

Remove the rear axle [5], left adjusting plate [6] and rear wheel.



NOTE:

- Do not suspend the rear brake caliper assembly from the brake hose. Do not twist the brake hose.
- Do not operate the brake pedal after removing the rear wheel.

NOTE:

- Do not operate the parking brake lever after removing the rear wheel.

! DCT model:

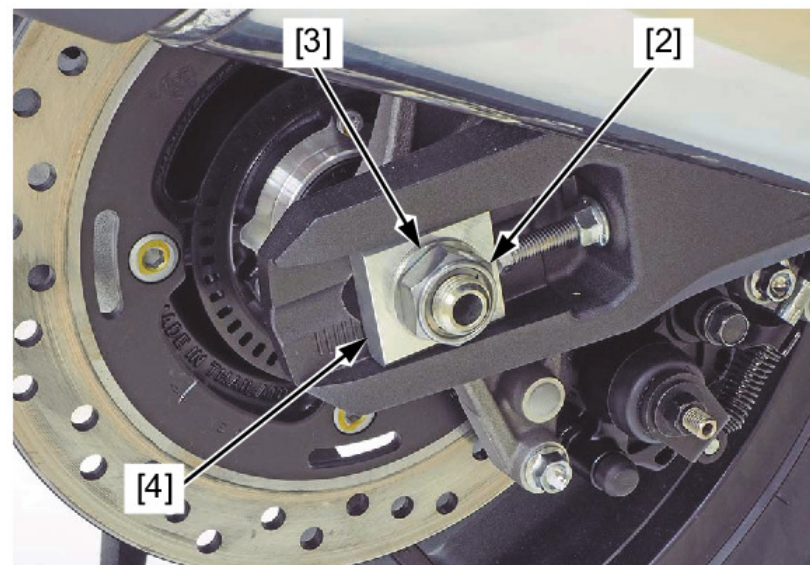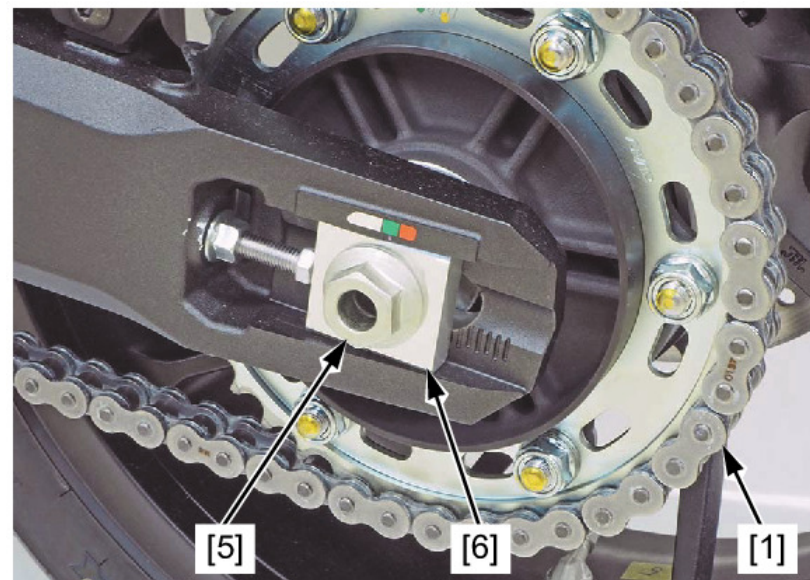

Remove the side collars [1].

