
REMOVAL/INSTALLATION Page 1 of 1

REMOVAL/INSTALLATION

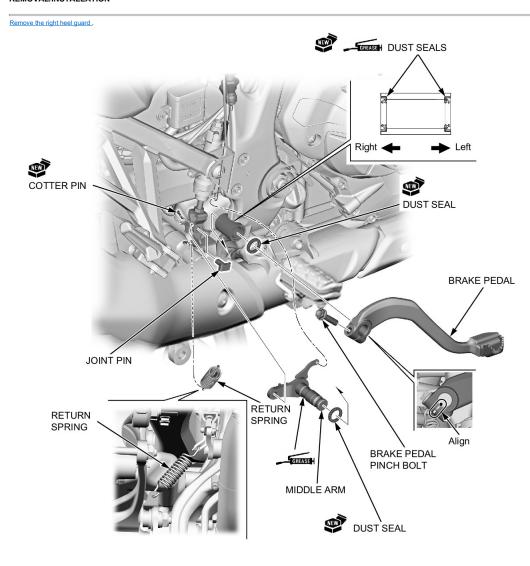

NOTE:

- Align the brake pedal slit with the middle arm punch mark.
 Apply grease to the dust seal lips.
 Apply grease to the middle arm pivot sliding surface.