


**REMOVAL/INSTALLATION**

Remove the following:


- [Middle cowl](#)
- Upper deflector socket bolt (long) [1]
- Plastic washer [2]
- Rubber washer [3]
- Well nuts [4]

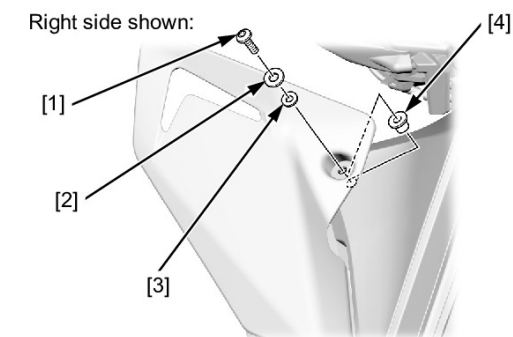

Remove the following:

- Socket bolts [1]
- Trim clips [2]

Disconnect the USB socket [3] and accessory socket 2P (Black) connector [4].  
Remove the tank front cover [5].

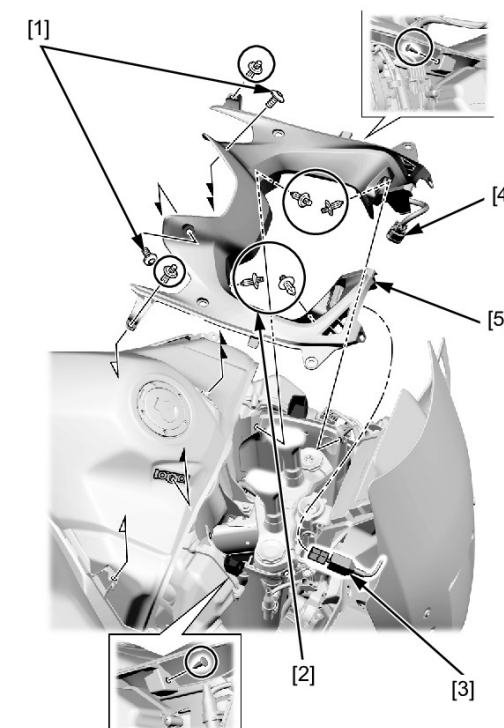

Remove the collar [4].

Installation is in the reverse order of removal.

**TORQUE:**

Upper deflector socket bolt (long):	0.54 N·m (0.06 kgf·m, 0.4 lbf·ft)
-------------------------------------	-----------------------------------

**NOTE:**

- Install the USB socket box as shown.

