

Description

Google Cloud Drive download link:

<https://drive.google.com/drive/folders/1ZXyel2LAcHdFSkilZ5ASejIG-4toeGsX?usp=sharing>

Listing page link

https://www.aliexpress.us/item/3256802746106751.html?spm=a2g0o.order_list.order_list_main.5.41fe18026Bi77l&gatewayAdapt=glo2usa

VFD display, 8-bit 5x7 dot matrix, with bare screen, module and serial screen module for sale
Provide manual materials, have certain technical support,
51 driver code and arduino driver code are written in C language for easy portability.

At present, it has been improved to a smaller size module, 4 M2 mounting holes, 2 M3 mounting holes, convenient for self-installation, improved size 93 x 20 mm

EN is the power supply part enable, set the on-board short-circuit pad J1, short-circuit the power directly to enable the power supply part of the circuit.

SPI interface, ESP8266, ESP32, etc. MCU can all be driven.

Use FUTABA imported display with beautiful colors.

Ultra-thin design. The overall thickness is about 10mm.

Command function 1: Set the number of bits

Command function 2: Set brightness

Command function 3: light up

Command function 4: write a character at the specified position

Command function 5: start writing a character string at the specified position

```
Void main()
```

```
{
```

```
RESET;
```

```
Command function 1;
```

```
Command function 2;
```

```
Command function 4;
```

```
Command function 3;
```

```
while(1)
```

```
{
```

```
}
```


```
}
```

There is also a 6-digit VFD module provided, which shows that the VFD has a wider viewing angle and a smaller size (75x20mm). The program is common (the internal driver IC is the same)

There are also larger 16-bit modules, 150mmx25mm. The program is also universal (drive ic consistent)


=====

8 bit only screen Size: 81×16mm

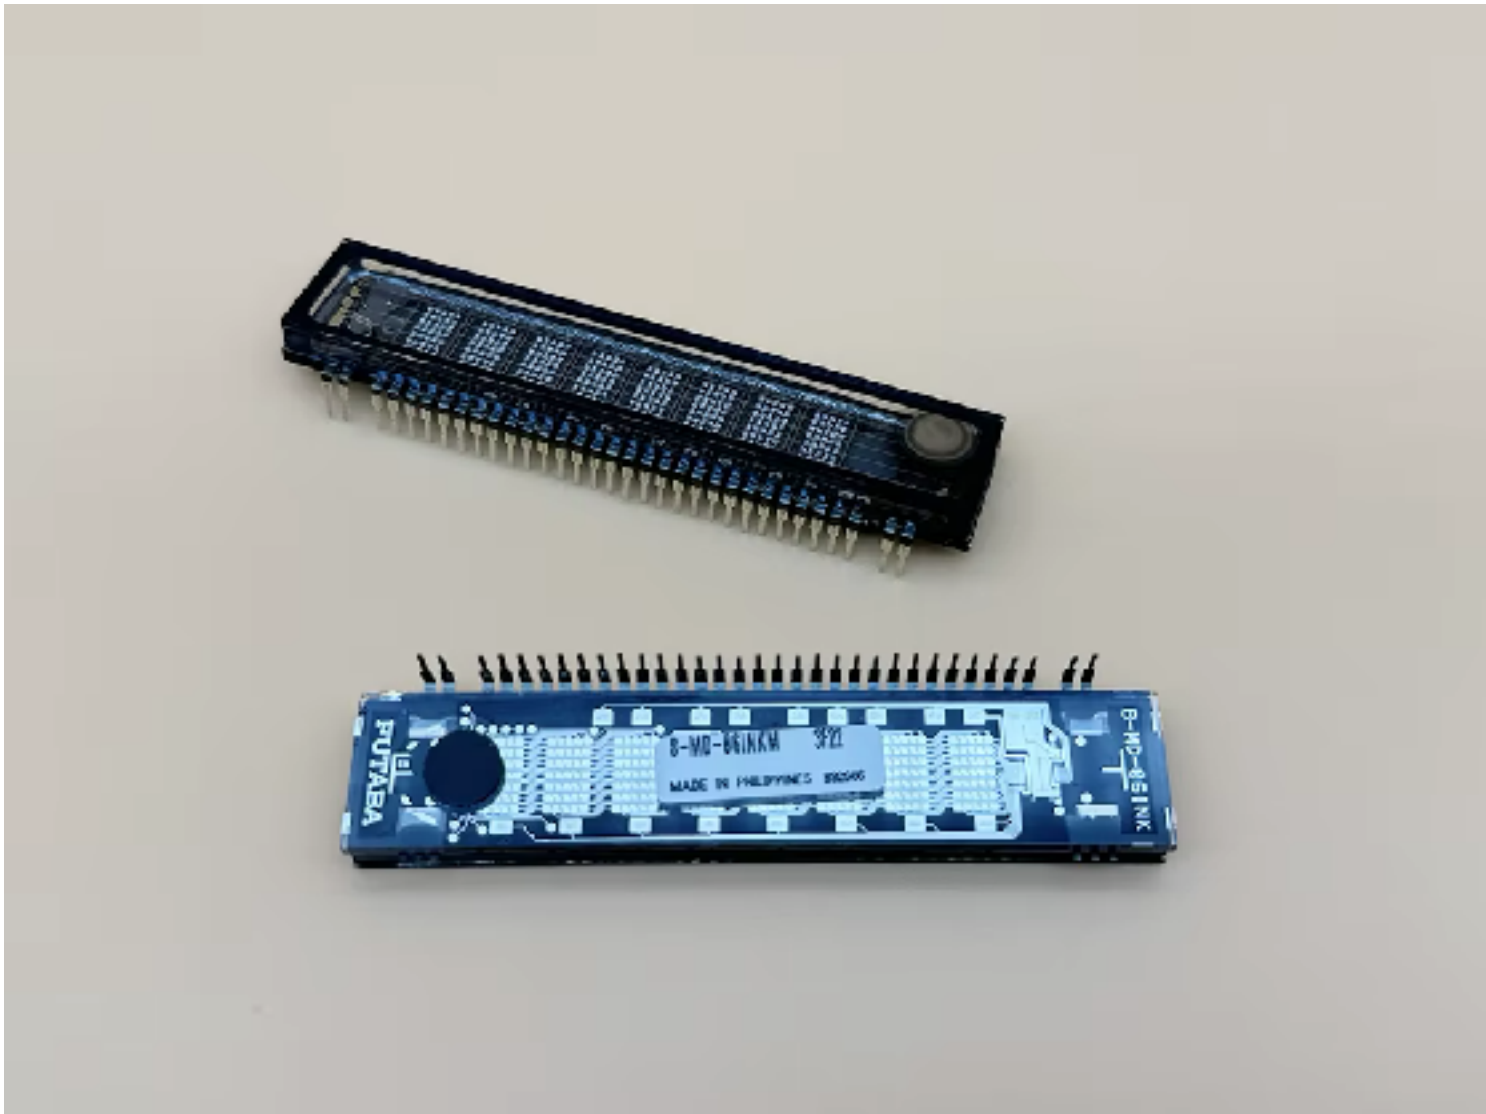

=====

Serial 8 bit PCB size: 93×20mm

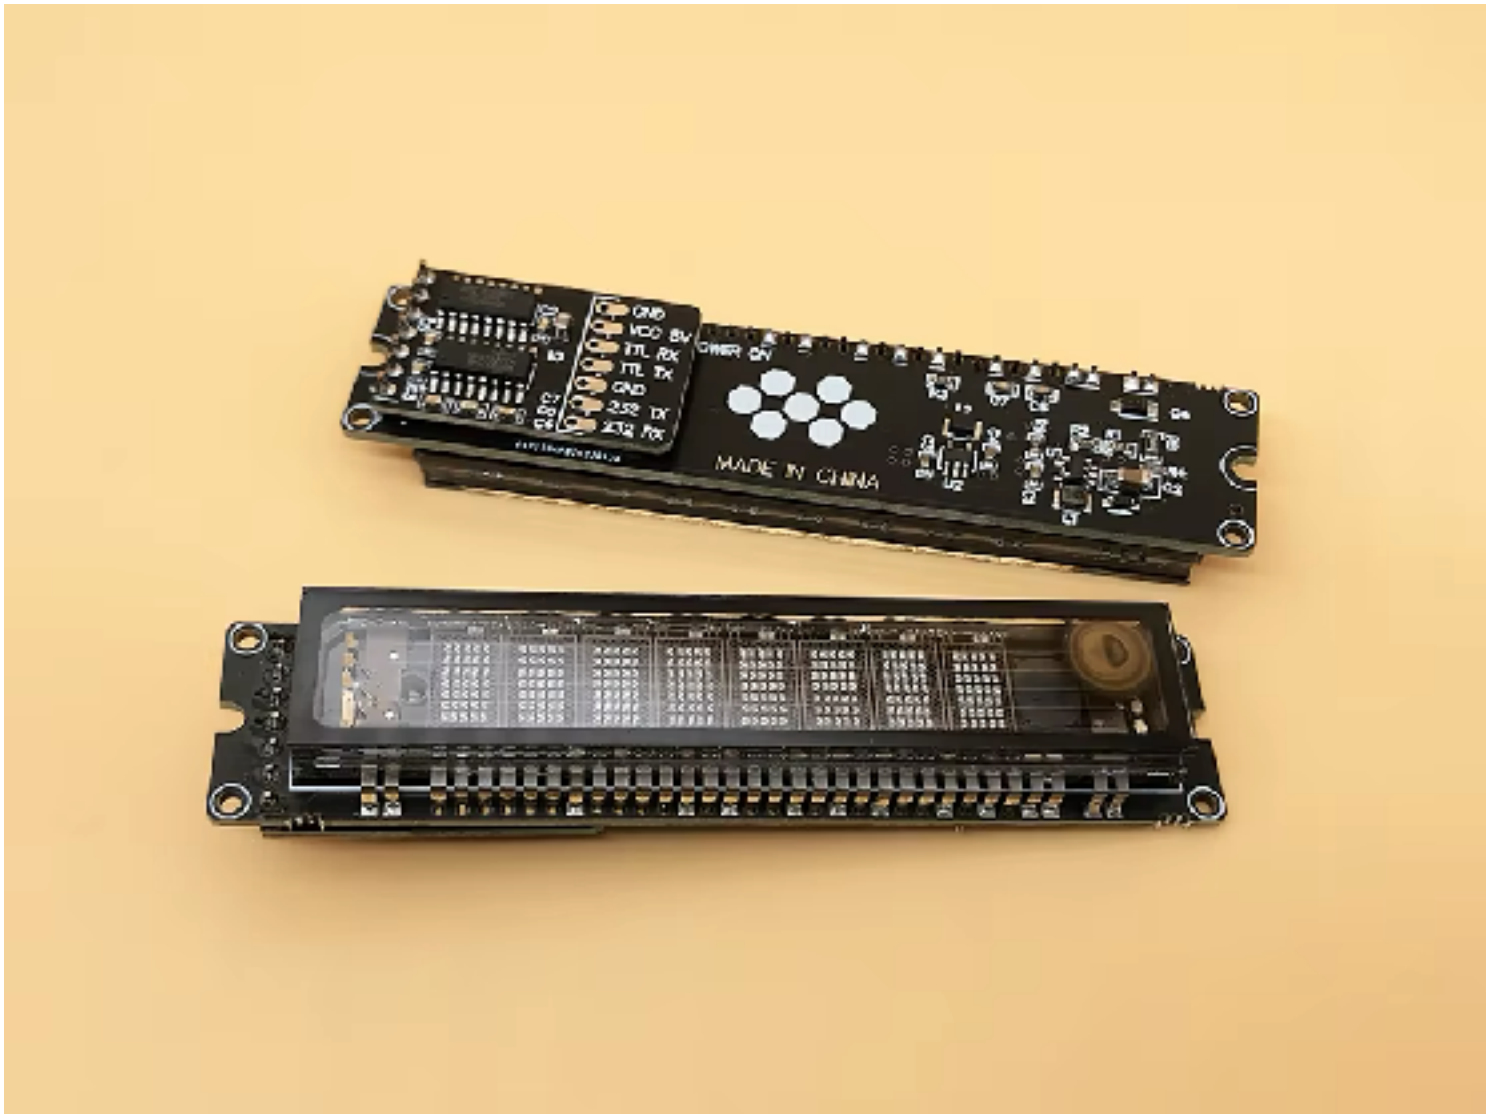


=====

Standard 8 bit PCB size: 93×20mm



=====


Standard 16 bit PCB size: 151×26mm

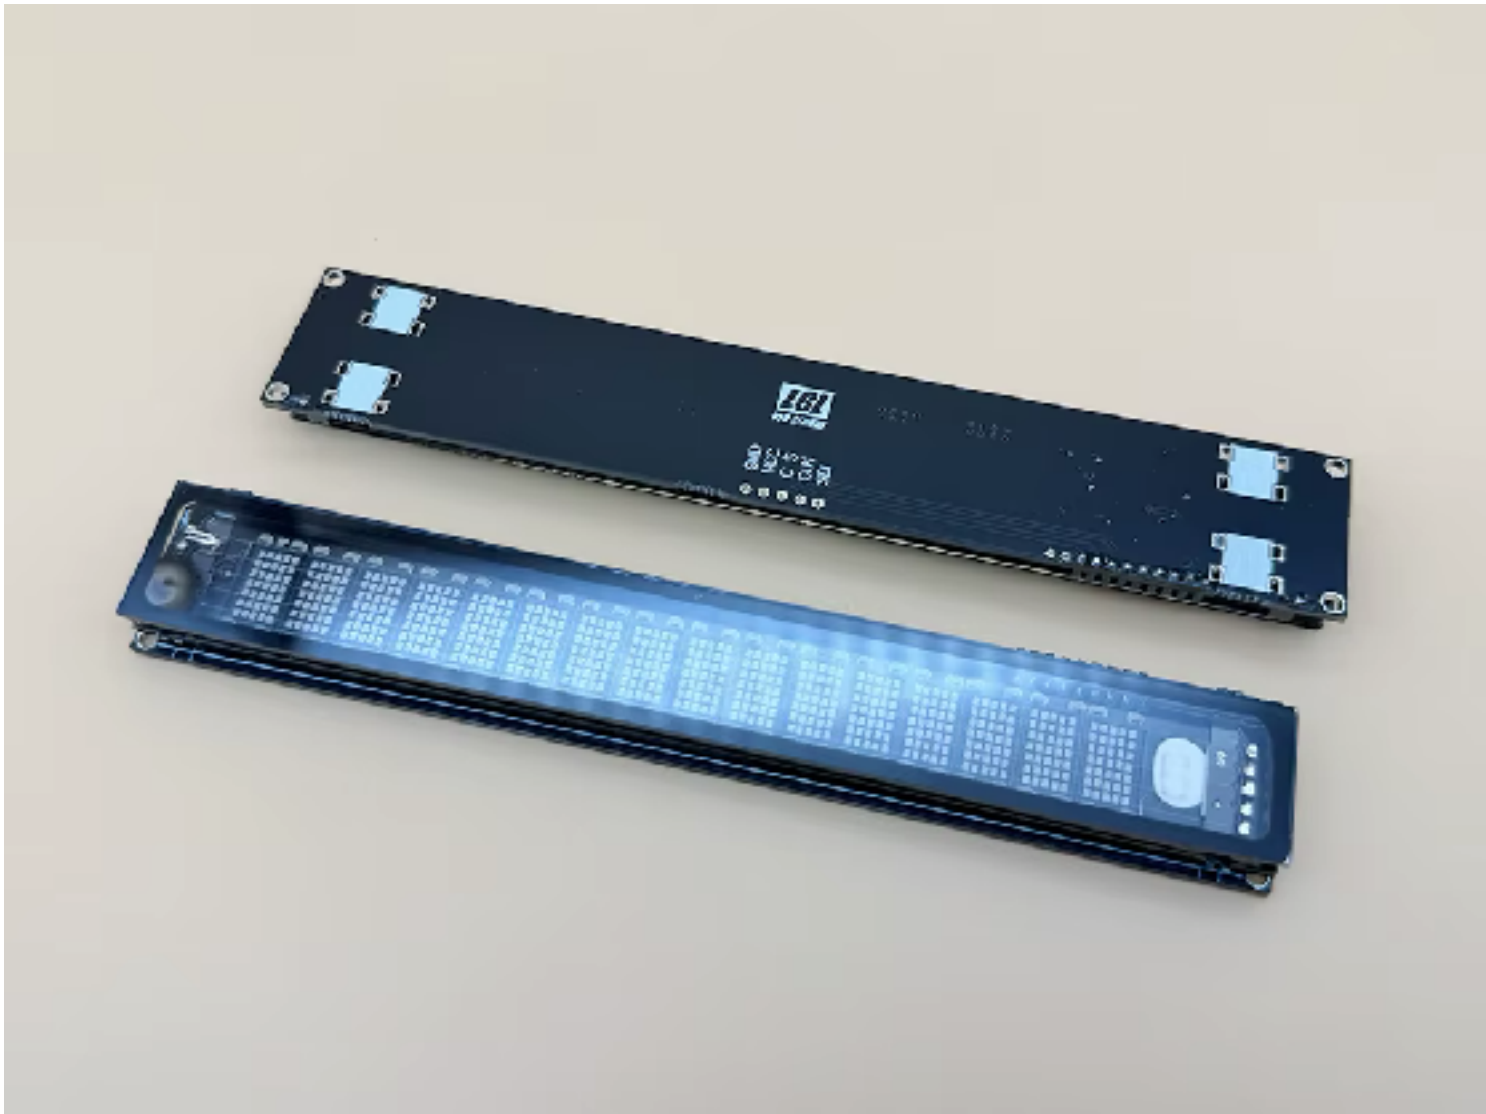


Standard 6 bit PCB size: 68×18mm




=====

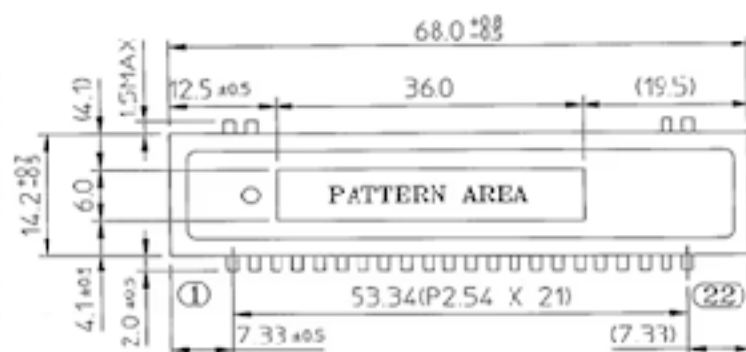

6位 5*7 点阵

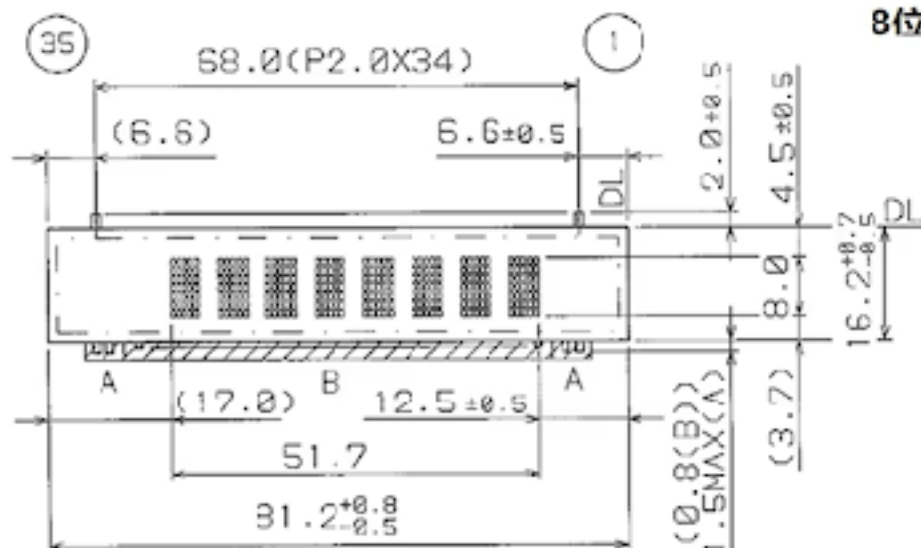

8位 5*7点阵

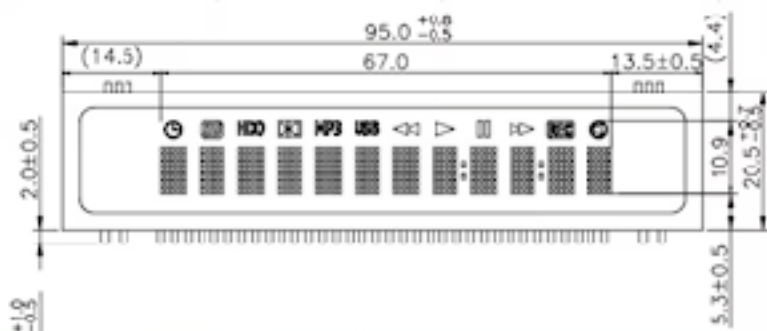

12位 5*7点阵
加logo



16位 5*7点阵

串口波特率 9600
 停止位 1
 无校验
 数据长度 8
 数据结构 帧头+显示数据+显示长度+帧尾

利用串口传输		
帧头	0x 19	hex
显示数据	字符	ASCII
显示长度	01-255	hex
帧尾	1	hex

见附录1

举例 0x 48 00 01 02 03 04 05
 06 07 FD 01

利用自定义字模		
帧头	0x 01	hex
显示位置	0-9	hex
显示字模	字模数据	hex
显示长度	01-255	hex
帧尾	1	hex

举例 0x 00 00 00 02 03 02 4B 4B
 00 00 FD 01

	0	5	50	40	45
LSB	0	1	0	0	0
	1	0	1	0	0
	0	1	0	0	0
	0	0	0	1	1
	0	0	1	0	0
	0	0	1	0	0
	0	0	0	1	1
MSB	0	0	0	0	0

附录1

Table 2. COREM Codes (General-purpose code: 02)

MSB LSB	0000	0001	0010	0011	0100	0101	0110	0111	1000	1001	1010	1011	1100	1101	1110	1111
0000	EAM0			00P	P	C	E									
0001	EAM1	!	1	A	Q	a	q	U	e	i	B	E	E	J	Z	
0010	EAM2	"	2	B	R	b	r	E	E	o	r	R	O	P	*	
0011	EAM3	#	3	C	S	c	s	a	o	U	4	J	E	Y	1	
0100	EAM4	\$	4	D	T	d	t	a	o	n	E	x	I	o	*	
0101	EAM5	%	5	E	U	e	u	a	o	n	7	1	a	U	s	
0110	EAM6	&	6	F	V	f	v	a	o	o	o	2	E	H	=	
0111	EAM7	'	7	G	W	g	w	C	U	O	x	3	I	W	@	
1000		(	8	H	X	h	x	e	e	z	P	x	O	W	@	
1001		)	9	I	Y	i	y	e	o	7	π	7	O	B	*	
1010		*	:	J	Z	j	z	e	o	7	P	±	B	B	*	
1011		+	;	K	[	k	[	e	o	7	6	↑	P	B	*	
1100		,	<	L	\	l	l	e	7	7	7	7	7	7	7	
1101		=	=	M	]	m	]	i	7	7	7	7	7	7	7	
1110		.	>	N	^	n	^	a	7	7	7	7	7	7	7	
1111		?	0	_	o	_	o	a	7	7	7	7	7	7	7	

