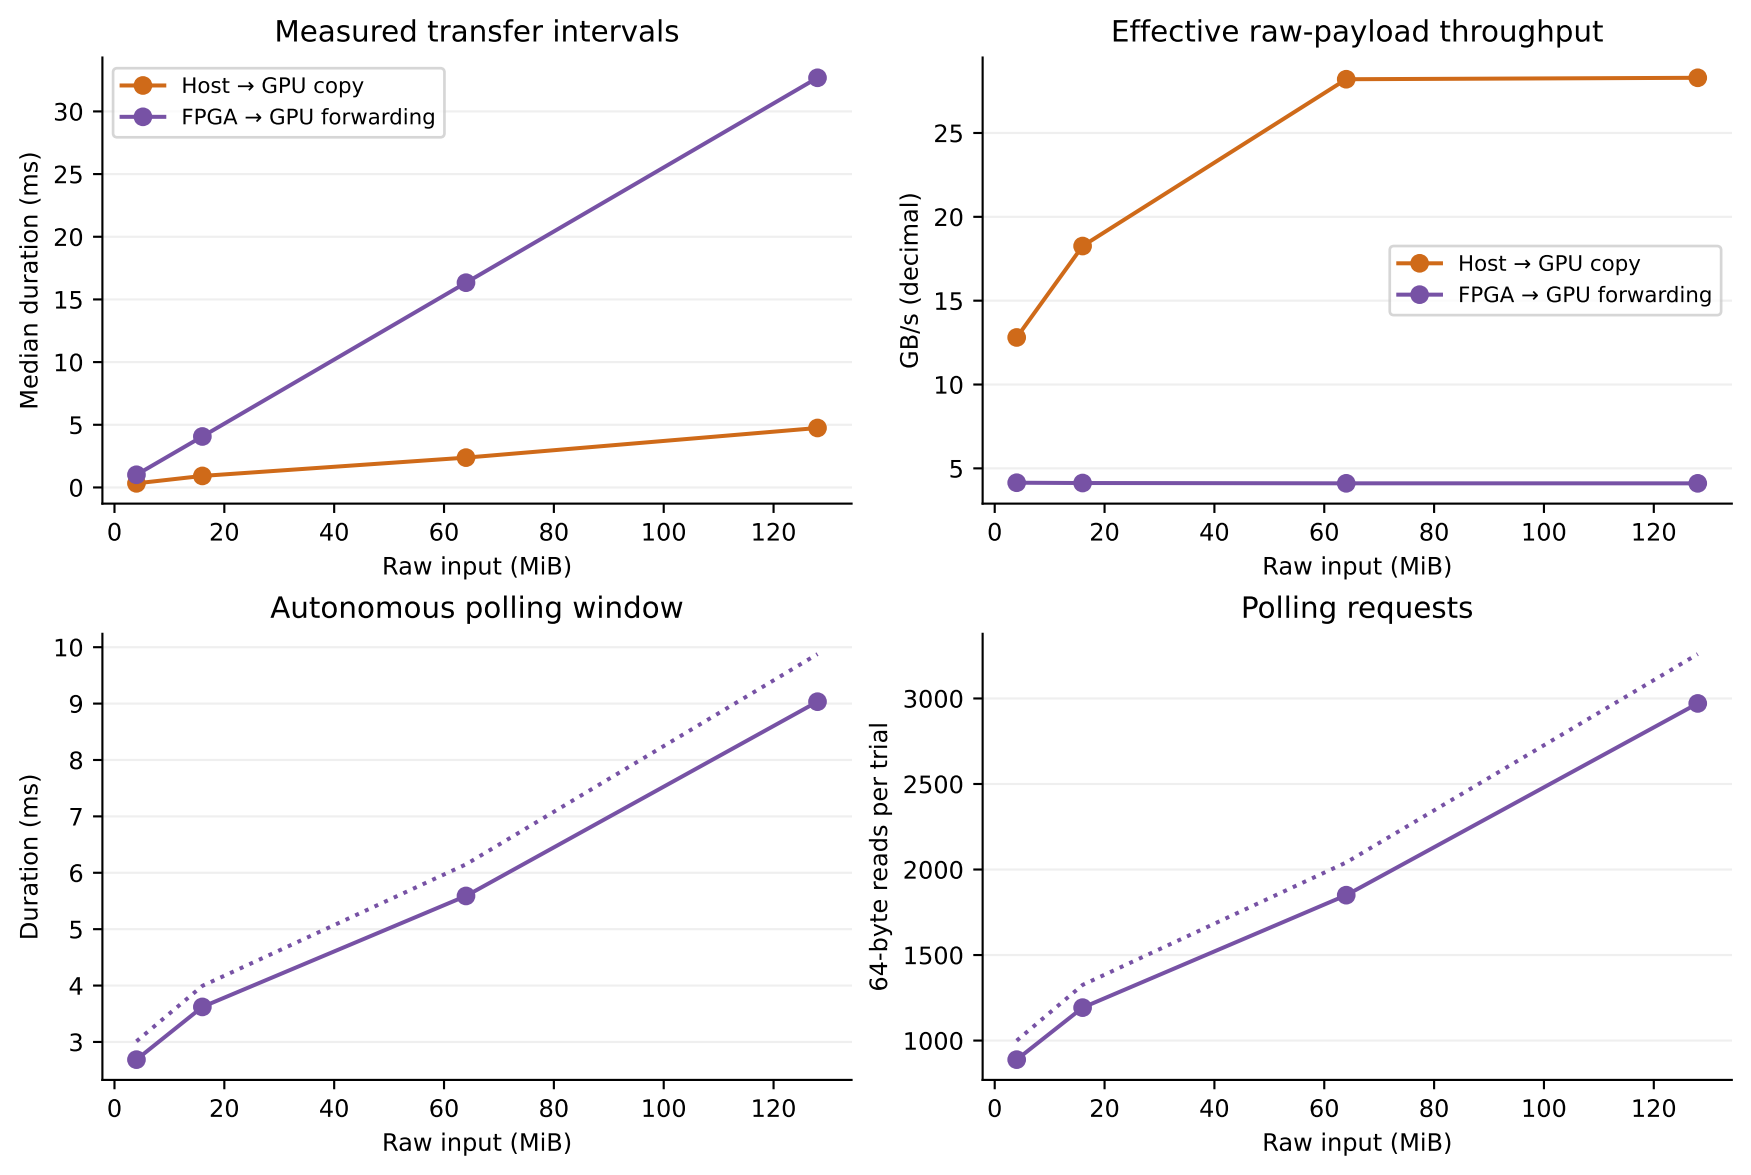
Measured transfer intervals
Host → GPU copy
FPGA → GPU forwarding
Median duration (ms)
Raw input (MiB)
Effective raw-payload throughput
GB/s (decimal)
Host → GPU copy
FPGA → GPU forwarding
Raw input (MiB)
Autonomous polling window
Duration (ms)
Raw input (MiB)
Polling requests
64-byte reads per trial
Raw input (MiB)