# GPU_P2P

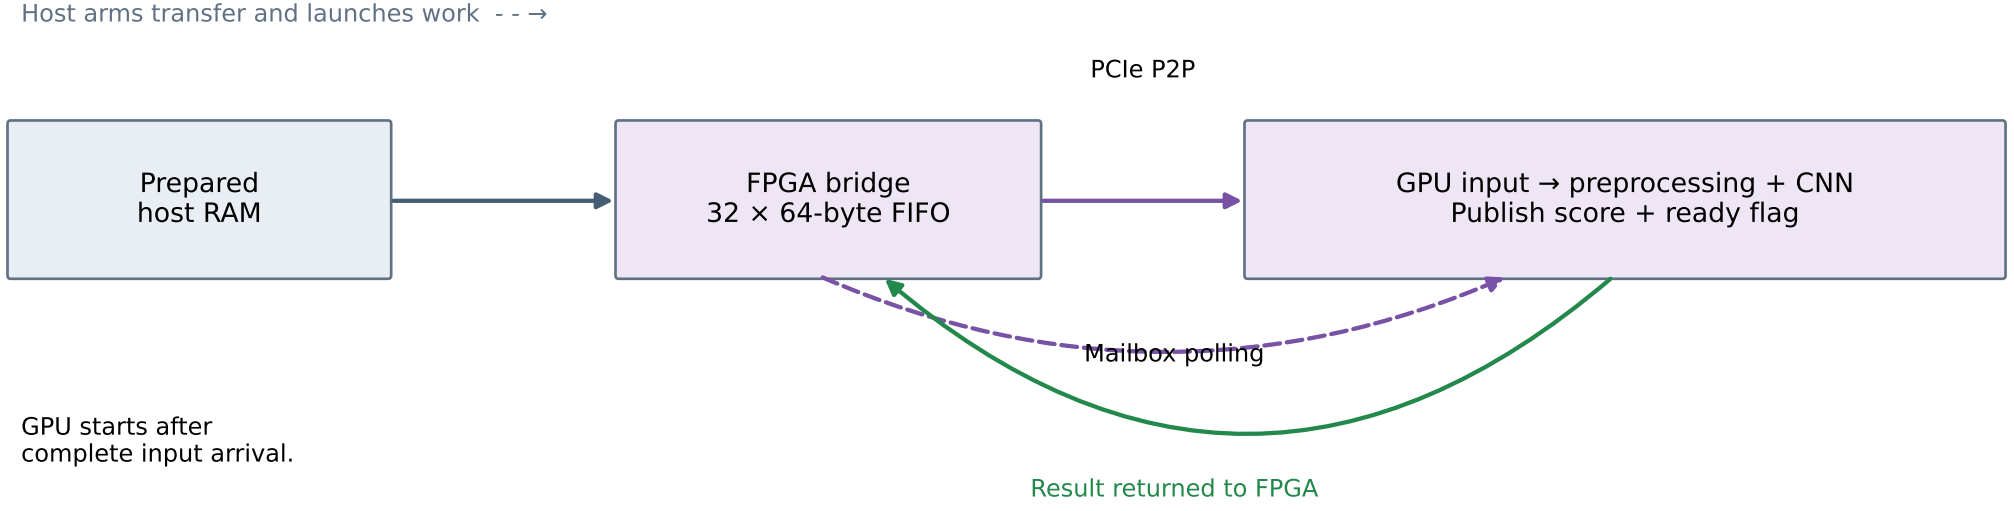
Host arms transfer and launches work
PCIe P2P
Prepared
host RAM
FPGA bridge
32 × 64-byte FIFO
GPU input → preprocessing + CNN
Publish score + ready flag
Mailbox polling
GPU starts after
complete input arrival.
Result returned to FPGA