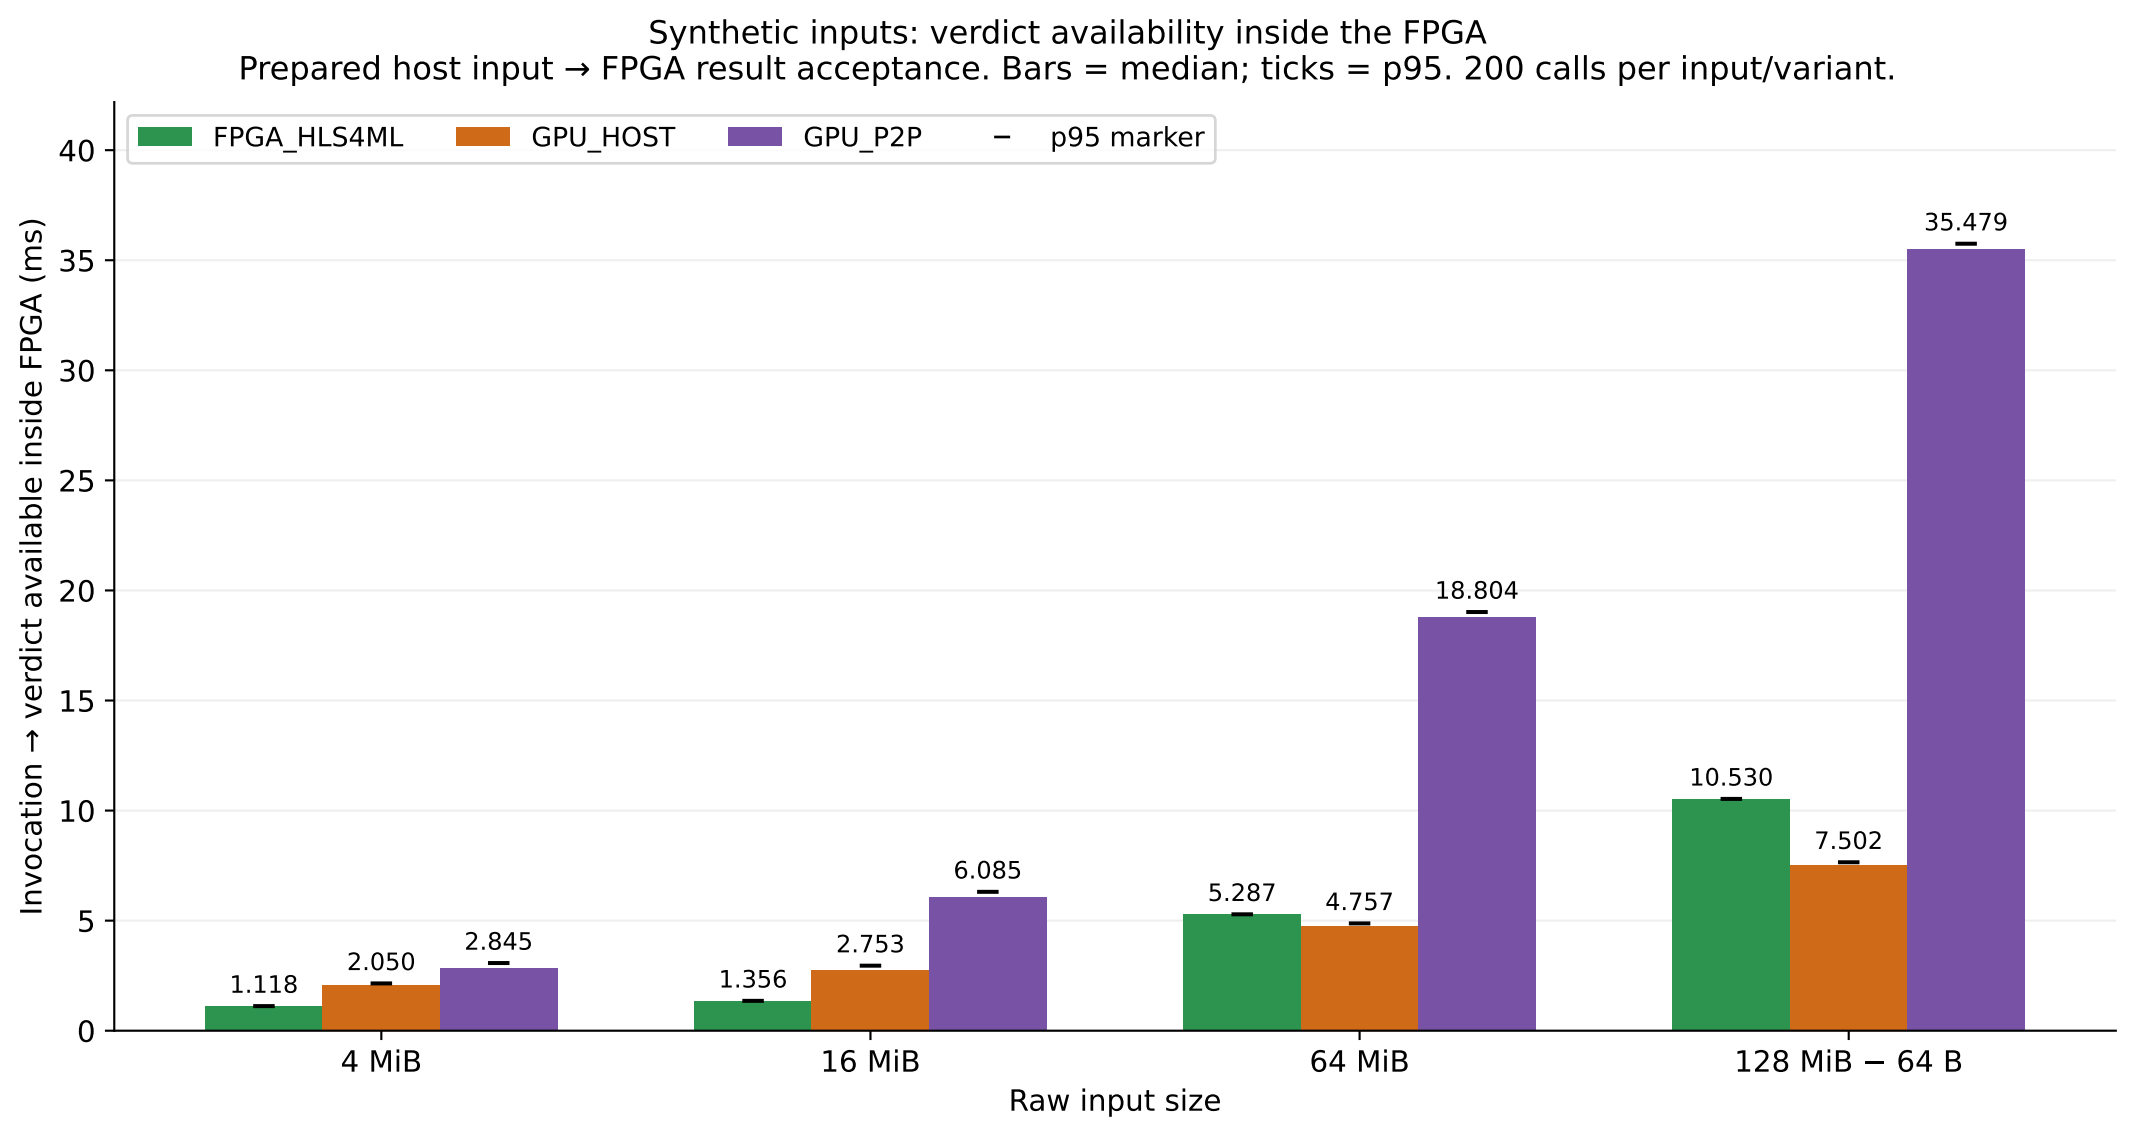
Synthetic inputs: verdict availability inside the FPGA
Prepared host input → FPGA result acceptance. Bars = median; ticks = p95. 200 calls per input/variant.
FPGA_HLS4ML
GPU_HOST
GPU_P2P
p95 marker
Invocation → verdict available inside FPGA (ms)
0
5
10
15
20
25
30
35
40
1.118
2.050
2.845
1.356
2.753
6.085
5.287
4.757
18.804
10.530
7.502
35.479
4 MiB
16 MiB
64 MiB
128 MiB − 64 B
Raw input size