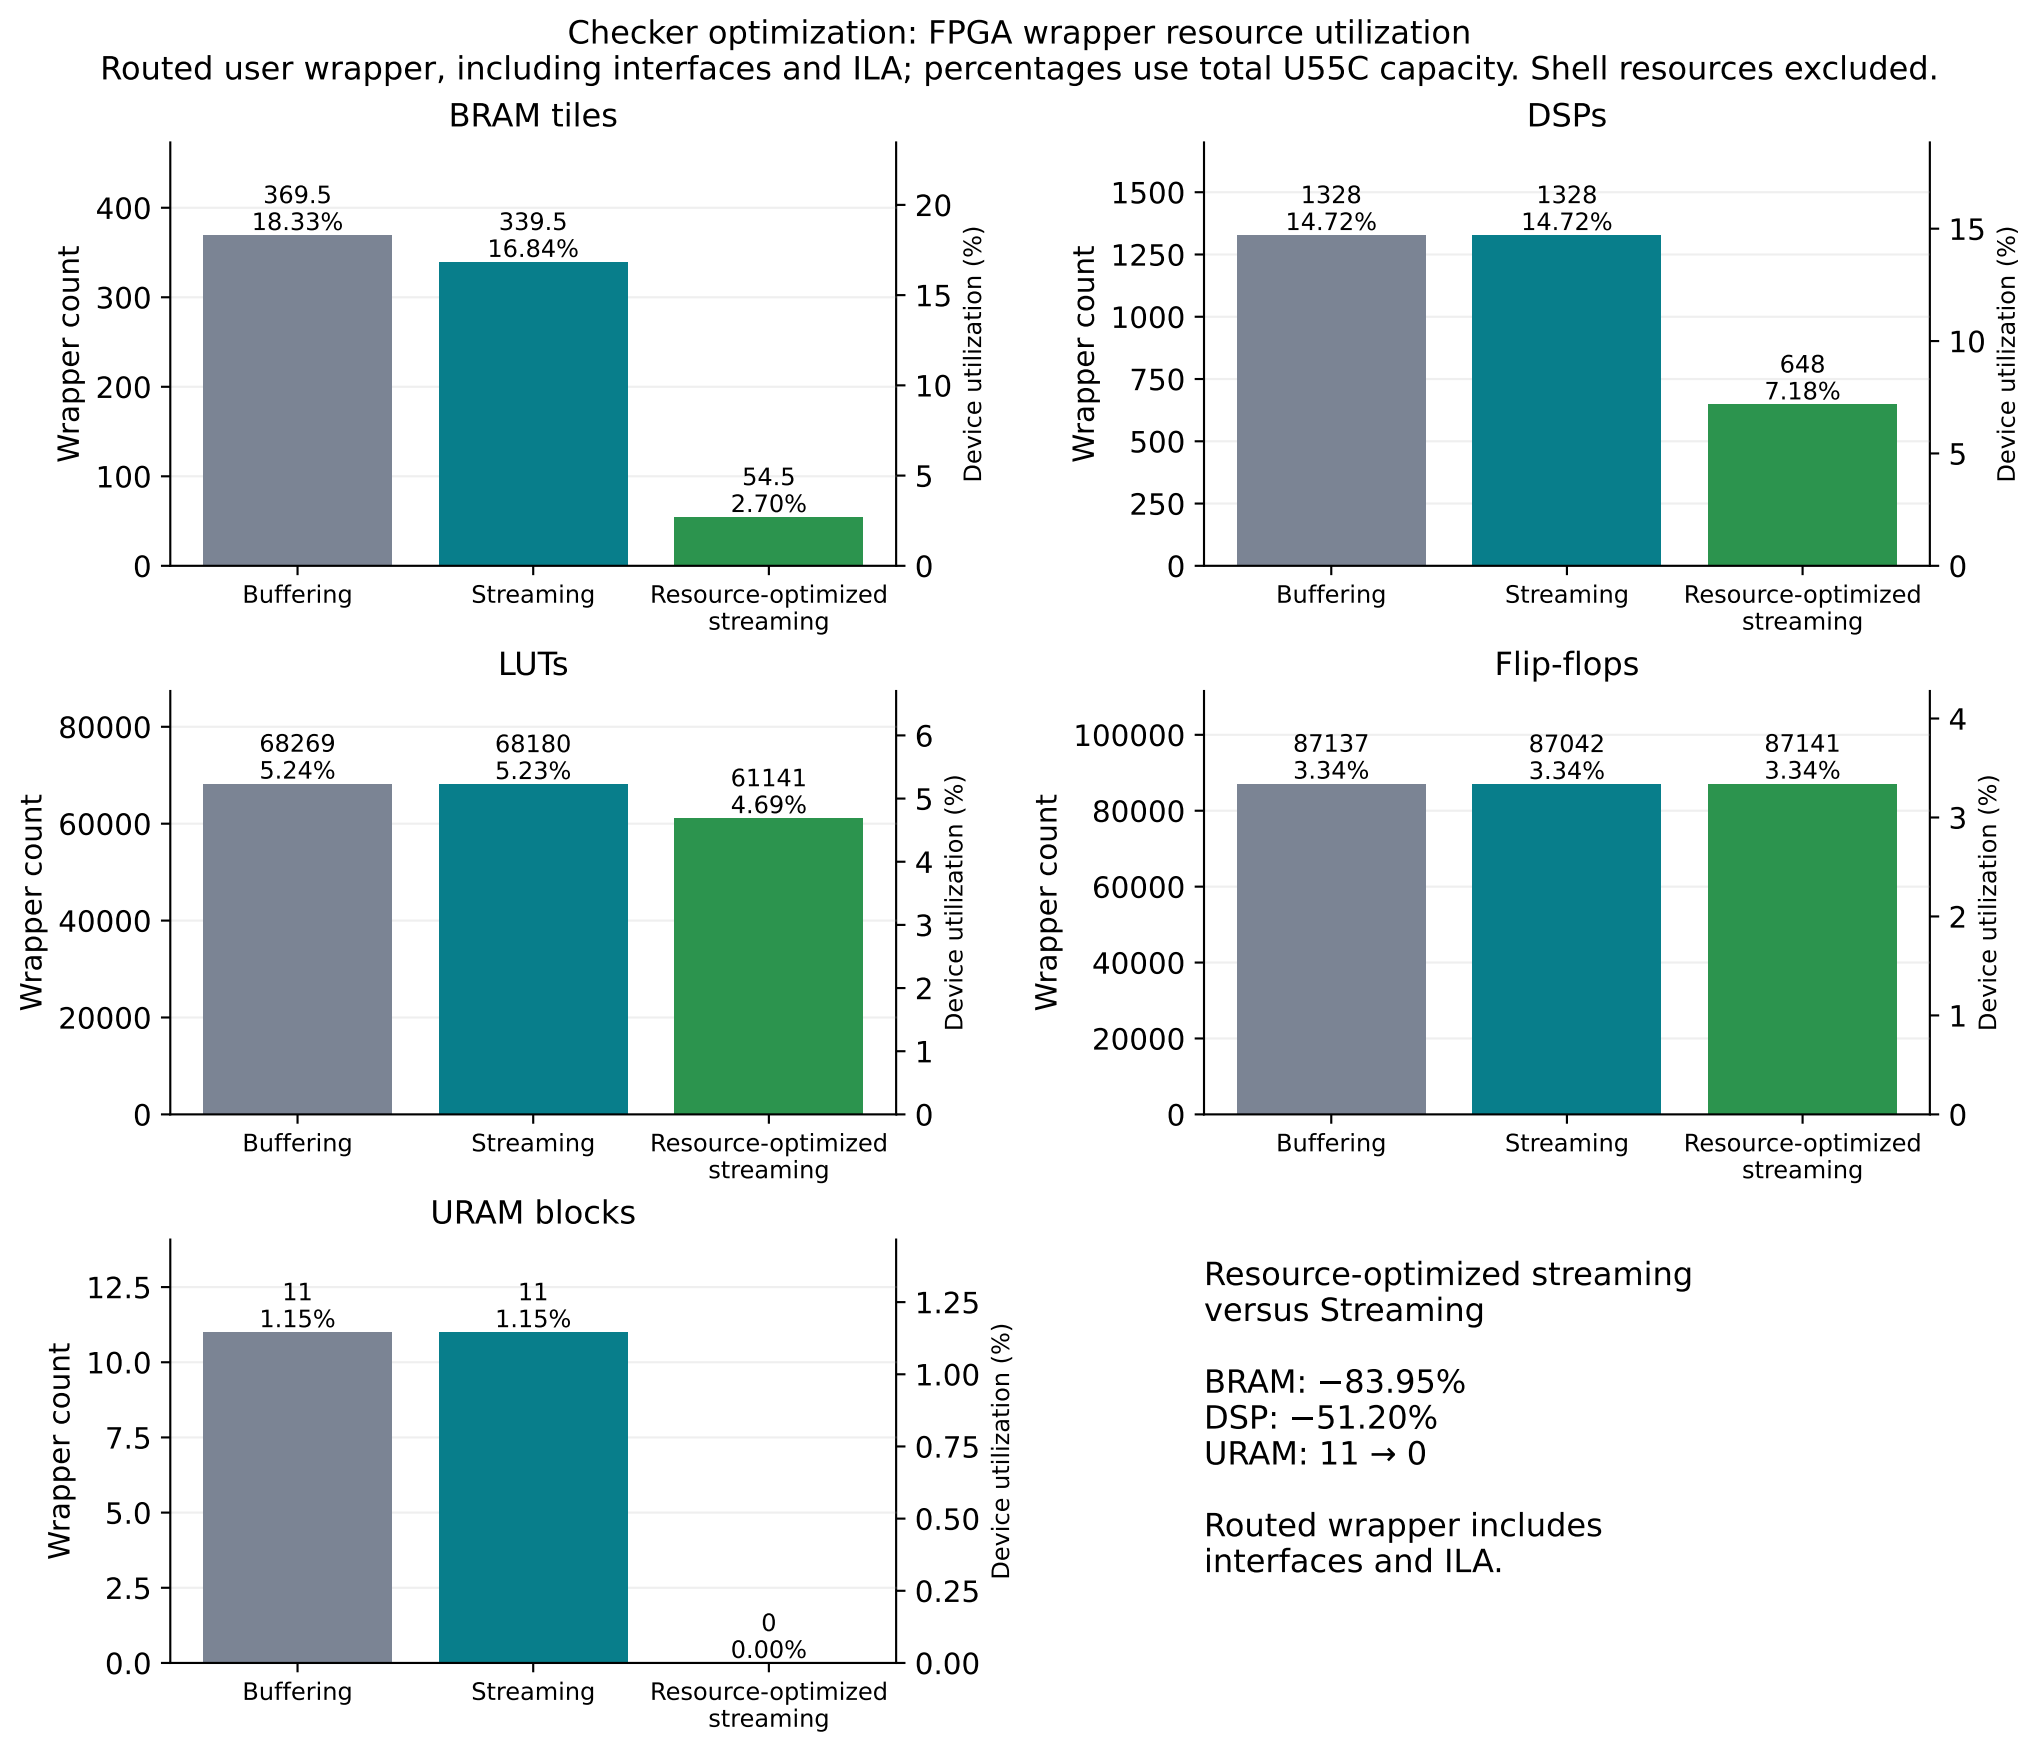
Checker optimization: FPGA wrapper resource utilization
Routed user wrapper, including interfaces and ILA; percentages use total U55C capacity. Shell resources excluded.
BRAM tiles
Wrapper count
Device utilization (%)
369.5
18.33%
339.5
16.84%
54.5
2.70%
Buffering
Streaming
Resource-optimized streaming
DSPs
1328
14.72%
1328
14.72%
648
7.18%
LUTs
68269
5.24%
68180
5.23%
61141
4.69%
Flip-flops
87137
3.34%
87042
3.34%
87141
3.34%
URAM blocks
11
1.15%
11
1.15%
0
0.00%
Resource-optimized streaming versus Streaming
BRAM: −83.95%
DSP: −51.20%
URAM: 11 → 0
Routed wrapper includes interfaces and ILA.