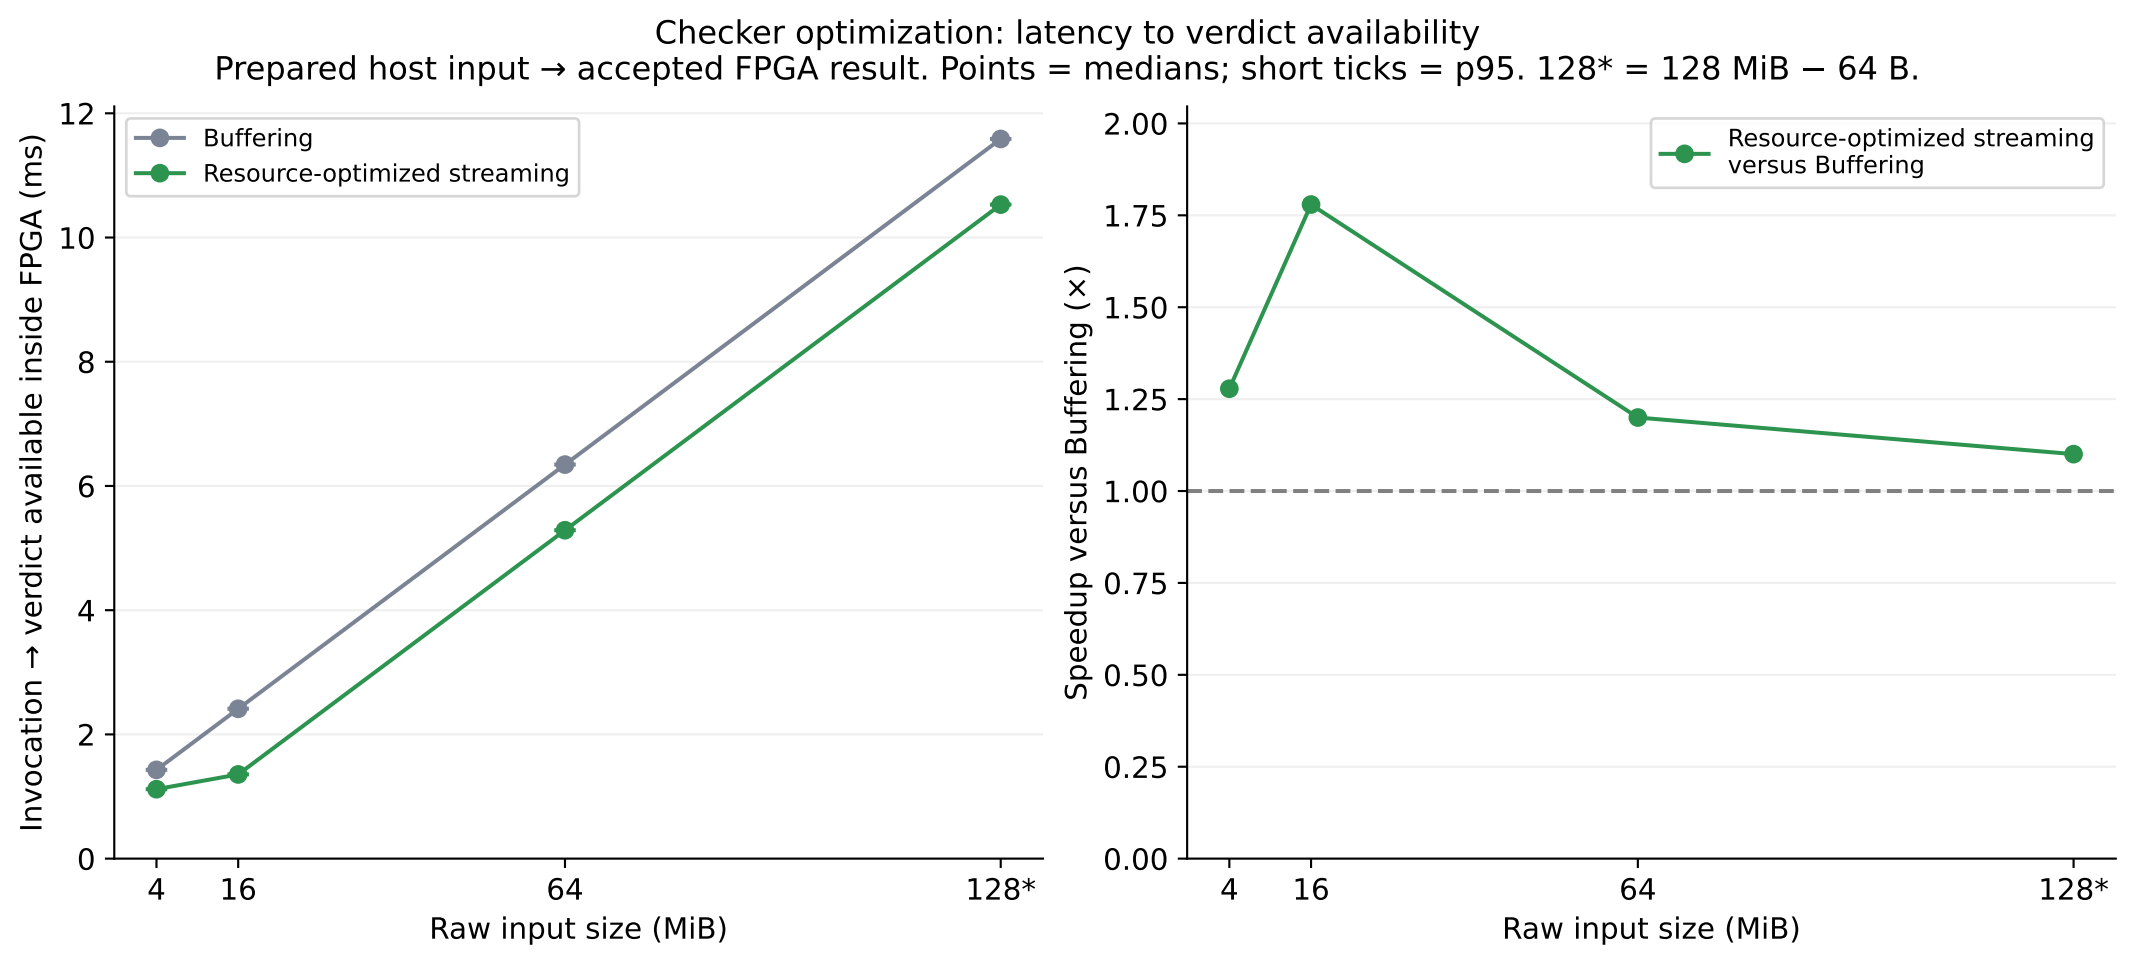
Checker optimization: latency to verdict availability
Prepared host input → accepted FPGA result. Points = medians; short ticks = p95. 128* = 128 MiB − 64 B.
Buffering
Resource-optimized streaming
Invocation → verdict available inside FPGA (ms)
0
2
4
6
8
10
12
4
16
64
128*
Raw input size (MiB)
Resource-optimized streaming versus Buffering
Speedup versus Buffering (×)
0.00
0.25
0.50
0.75
1.00
1.25
1.50
1.75
2.00
4
16
64
128*
Raw input size (MiB)