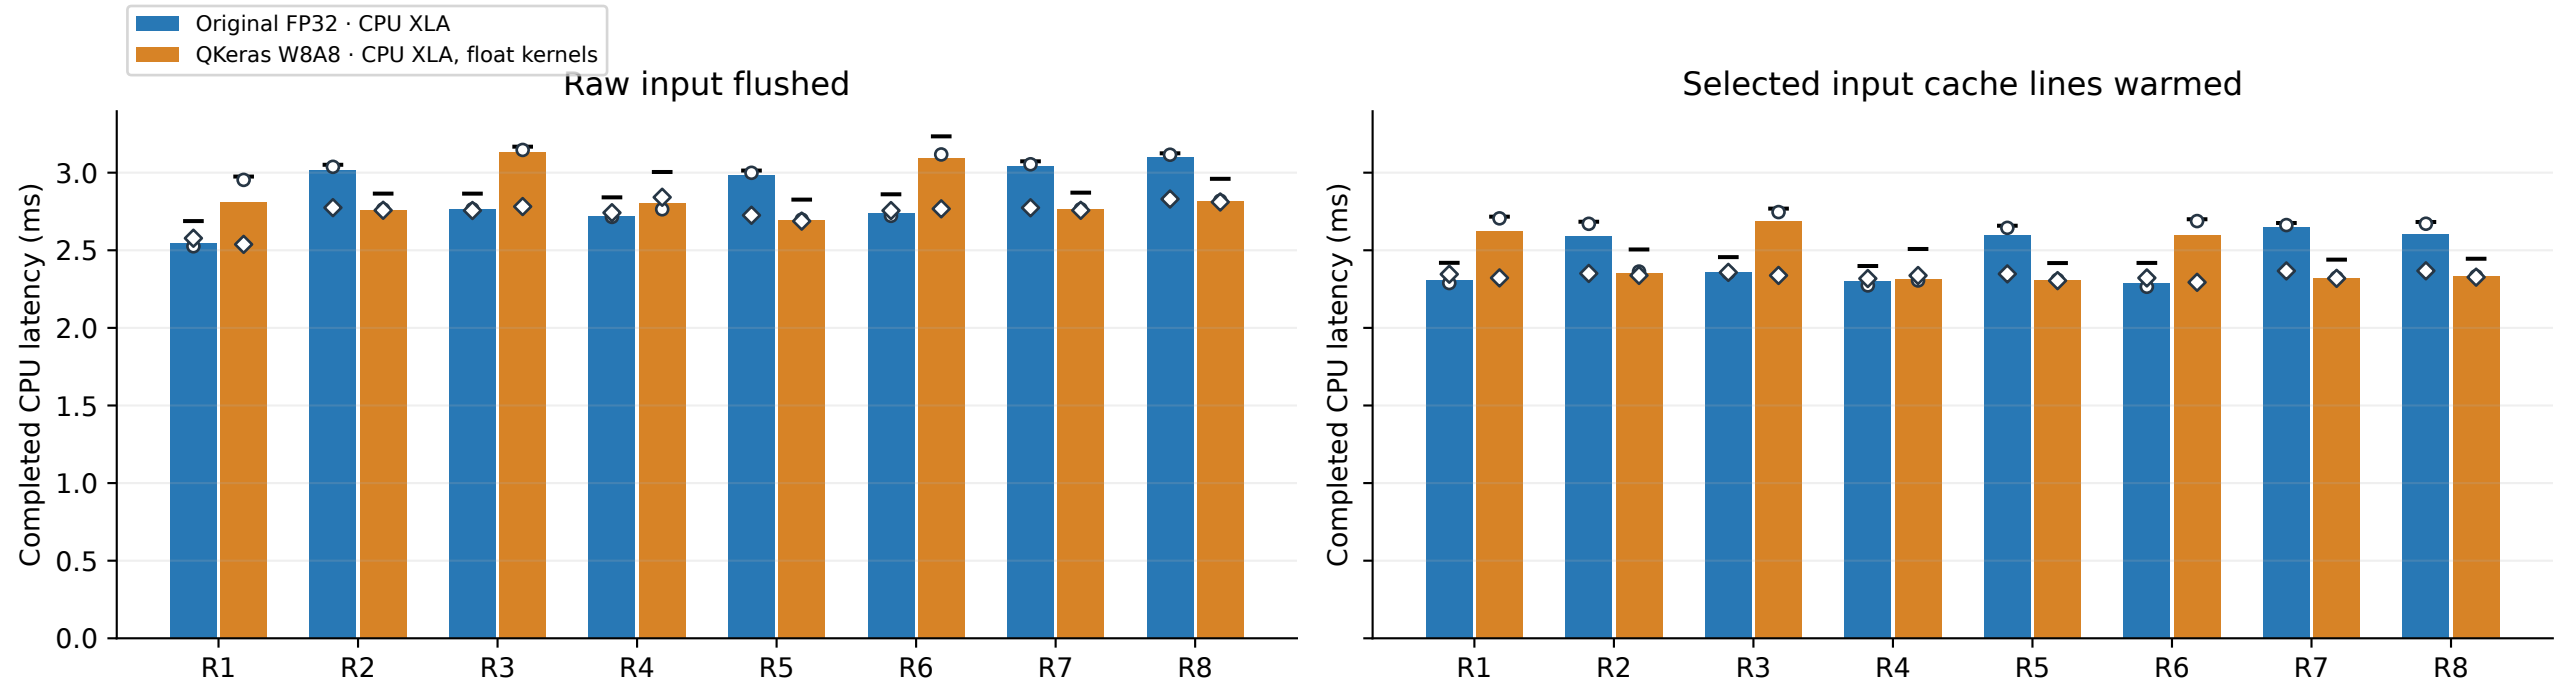2 · Cache-state control: cold versus warmed selected input lines