Customer Approved	

REV NO.	Contents	Date
V0	First release	2023-4-3

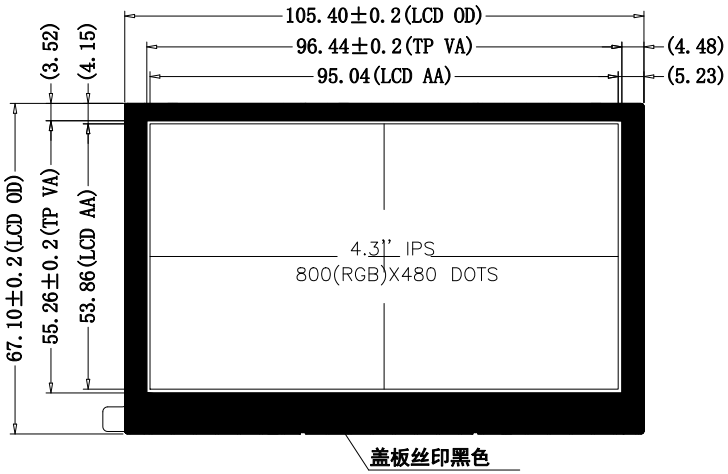

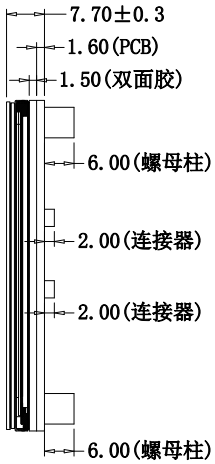

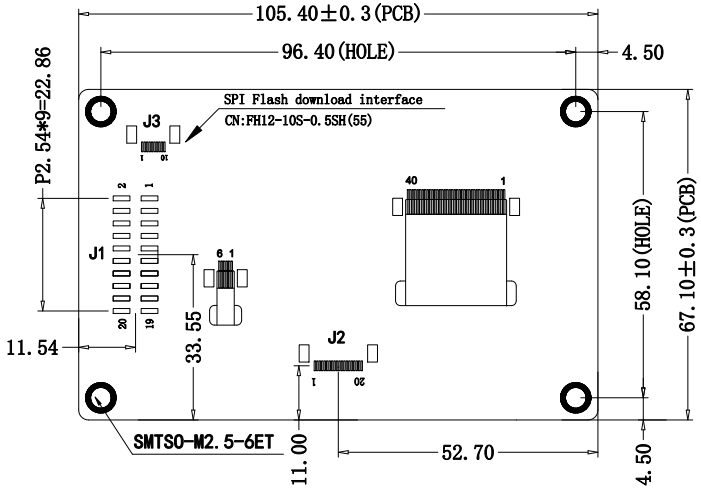

J1&J2 interface

NO.	SYMBC
1	VCC5V
2	VCC5V
3	GND
4	GND
5	LCD_CS
6	LCD_MOSI
7	LCD_SCLK
8	LCD_INT
9	LCD_RST
10	LCD_MISO
11	CTP_INT
12	CTP_SCL
13	CTP_SDA
14	CTP_RST
15	NC
16	GND
17	NC
18	NC
19	NC
20	GND

J3 interface

NO.	SYMBC
1	SF_CLK
2	SF_DI
3	SF_DO
4	SF_CS
5	LCD_RST
6	GND
7	NC
8	NC
9	3.3V
10	3.3V

SPI Flash烧录接口,烧录前
LCD_RST引脚必须接地

WKS 慧勤智远

Display Type:	4.3''IPS	Driver IC:	-	Pixel Pitch:	0.1188mm X 0.1122mm	Product NO:		WKS43WV046-WCT			
Display Mode:	Normally Black	Operating Temperature:	-20℃ to +70℃	Brightness:	350cd/m^2	Part NO:		TOUCH Moudel		APPD:	Sandy
Viewing Direction: (Gray inversion)	ALL VIEW	Storage Temperature:	-30℃ to +80℃	Backlight:	LED WHITE(5x2=10)	Rev:	V0	Unit:	mm	CHKD:	Tim
Display Resolution:	800(RGB)X480 pixels	Structure:	LCD + TOUCH + PCB	Material Note:	ROHS Request	Date:	2023-4-3	Scale:	1:1	DWN:	Jason
THIS DRAWING IS PROPERTY OF WAIKEN SMART CO. LTD, IT CANNOT BE REPRODUCED WITHOUT PERMISSION.						Unmarked Tolerance: ±0.20mm				Sheet:	1 OF 1