Customer Approved	

REV NO.	Contents	Date
V0	First release	2023-4-7

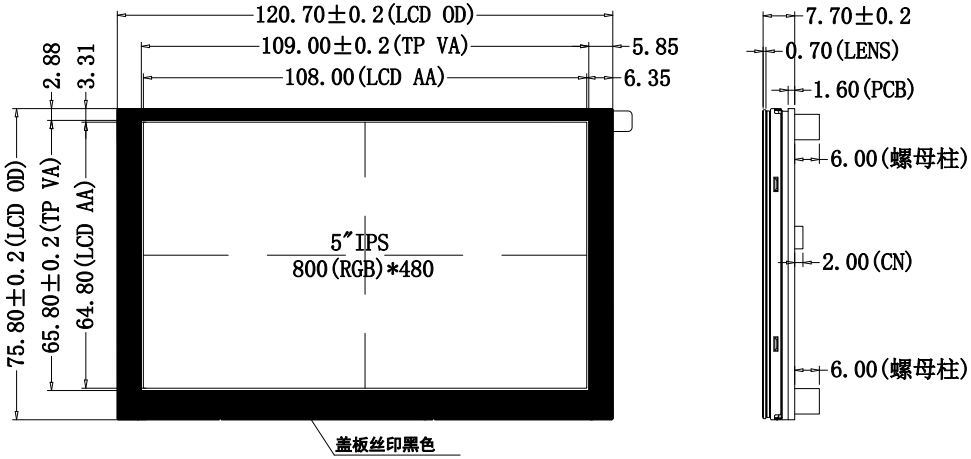

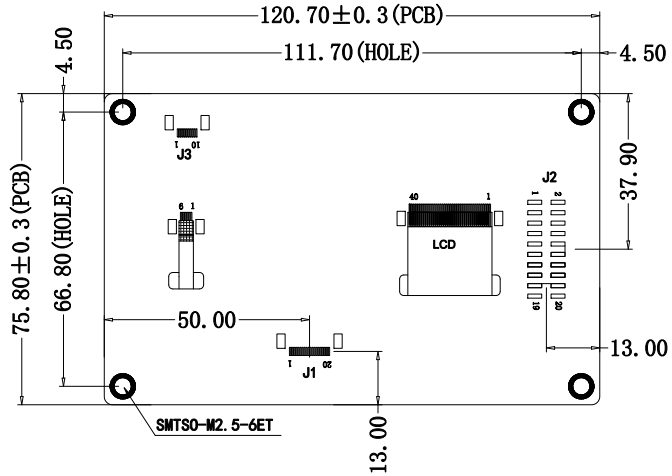

J1&J2 interface

NO.	SYMBC
1	VCC5V
2	VCC5V
3	GND
4	GND
5	LCD_CS
6	LCD_MOSI
7	LCD_SCLK
8	LCD_INT
9	LCD_RST
10	LCD_MISO
11	CTP_INT
12	CTP_SCL
13	CTP_SDA
14	CTP_RST
15	NC
16	GND
17	NC
18	NC
19	NC
20	GND

J3 interface

NO.	SYMBC
1	SF_CLK
2	SF_DI
3	SF_DO
4	SF_CS
5	LCD_RST
6	GND
7	NC
8	NC
9	3.3V
10	3.3V

SPI Flash烧录接口,烧录前
LCD_RST引脚必须接地

WKS 慧勤智远

Display Type:	5.0''IPS	Driver IC:	-	Pixel Pitch:	0.135mm X 0.135mm	Product NO:	WKS50WV048-WCT			
Display Mode:	Normally Black	Operating Temperature:	-20℃ to +70℃	LCM Brightness:	400 cd/m^2	Part Name:	LCM Outline		APPD:	Sandy
Viewing Direction: (Gray inversion)	ALL VIEW	Storage Temperature:	-30℃ to +80℃	Backlight:	White LED(6X3=18)	Rev:	V0	Unit: mm	CHKD:	Eric
Resolution:	800(RGB)X480 pixels	Structure:	LCD + TOUCH + PCB	Material Note:	ROHS Request	Date:	2023-4-7	Scale: 1:1	DWN:	Jason
THIS DRAWING IS PROPERTY OF WAIKEN SMART CO. LTD, IT CANNOT BE REPRODUCED WITHOUT PERMISSION.						Unmarked Tolerance±0.20mm			Sheet:	1 OF 1