Customer Approved	

REV NO.	Contents	Date
V0	First release	2025-9-22
V1	Change the pin definitions of the P2 interface	2026-3-19

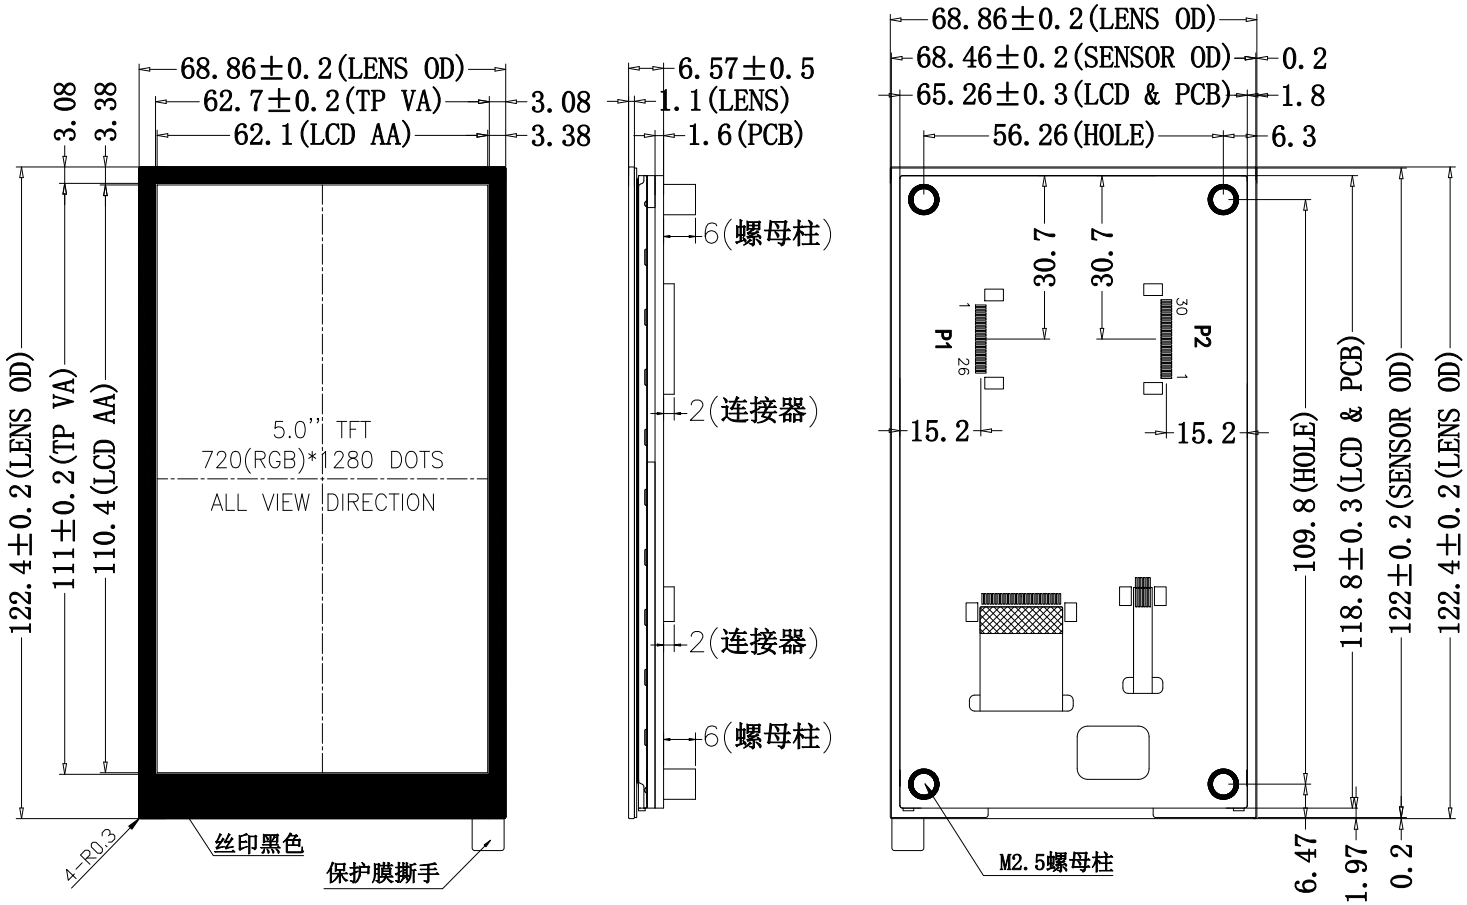

P2 intreface

PIN	SYMBOL
1	GND
2	MIPI_DON
3	MIPI_DOP
4	GND
5	MIPI_D1N
6	MIPI_D1P
7	GND
8	MIPI_CLKN
9	MIPI_CLKP
10	GND
11	MIPI_D2N
12	MIPI_D2P
13	GND
14	MIPI_D3N
15	MIPI_D3P
16	GND
17	BL_PWM
18	NC
19	NC
20	LCD_RST
21	LCD_ID
22	LCD_PWREN
23	TP_SCL
24	TP_SDA
25	TP_INT
26	TP_RST
27	GND
28	5V
29	5V
30	5V

P1 intreface

PIN	SYMBOL
1	5V
2	5V
3	TP_INT
4	TP_SCL
5	TP_SDA
6	TP_RST
7	BL_CTR
8	LCD_ID
9	GND
10	MIPI_D1P
11	MIPI_D1N
12	GND
13	MIPI_CLKP
14	MIPI_CLKN
15	GND
16	MIPI_DOP
17	MIPI_DON
18	GND
19	MIPI_D2P
20	MIPI_D2N
21	GND
22	MIPI_D3P
23	MIPI_D3N
24	GND
25	LCD_RST
26	GND

WKS 慧勤智远

Display Type:	5.0'' IPS	Interface	MIPI DSI + I2C	Pixel Pitch:	0.08625mm×0.08625mm	Product NO:	WKS50HD068-WCT				
Display Mode:	Normally Black	Operating Temp.:	-20℃ to +70℃	Brightness:	300 cd/m^2	Part Name:		TOUCH Moudel		APPD:	
Viewing Direction:	ALL VIEW	Storage Temp.:	-30℃ to +80℃	Backlight:	12 LED	REV:	V1	Unit:	mm	CHKD:	
Resolution:	720(RGB)x1280	Structure:	LCD+TOUCH+PCB	Material Note:	ROHS Request	Date:	2026-3-19	Scale:	1:1	DWN:	Jason
THIS DRAWING IS PROPERTY OF WAIKEN SMART CO. LTD, IT CANNOT BE REPRODUCED WITHOUT PERMISSION.						Unmarked Tolerance:	±0.20mm			Sheet:	1 OF 1