


UNIVERSITY OF PADOVA

Embedded Real-Time Control

Laboratory report

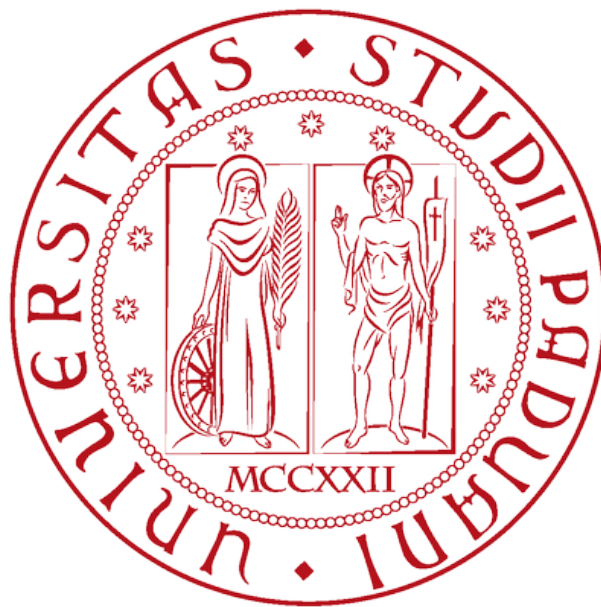

Maximillime - (2096189)  
Mohammadjavad Rajabi - (2085121)  
Pouria Zakariapour - (2072836)  
Parsa Majidi - (2080216)

Academic Year 2022-2023

# Contents

<b>0</b>	<b>Abstract</b>	<b>2</b>
<b>1</b>	<b>Laboratory 1: I2C</b>	<b>3</b>
1.1	Description . . . . .	3
1.2	Inter-Integrated Circuit (I2C) . . . . .	3
1.3	SX1509 I/O Expander . . . . .	4
1.4	APIs . . . . .	5
1.5	Exercise 1: . . . . .	7
1.5.1	Description . . . . .	7
1.5.2	Code . . . . .	7
1.5.3	Code Explanation: . . . . .	7
1.6	Exercise 2: . . . . .	8
1.6.1	Description: . . . . .	8
1.6.2	Code: . . . . .	8
1.6.3	Code Explanation: . . . . .	9
1.7	Exercise 3: . . . . .	10
1.7.1	Description: . . . . .	10
1.7.2	Code: . . . . .	10
1.8	Exercise 4: . . . . .	11
1.8.1	Description: . . . . .	11
1.8.2	Code: . . . . .	11
1.8.3	Code Explanation: . . . . .	12
<b>2</b>	<b>Laboratory 2: Open loop control (camera stabilizer)</b>	<b>13</b>
2.1	IMU . . . . .	13
2.2	Servo Motor . . . . .	14
2.3	Exercise1: . . . . .	15
2.4	Bonus: . . . . .	16
<b>3</b>	<b>Laboratory 3: Motor Control</b>	<b>17</b>
3.1	Description . . . . .	17
3.1.1	DC Motor . . . . .	17
3.1.2	DRV8871 . . . . .	18
3.1.3	PWM Setting . . . . .	20
3.1.4	Position Encoder . . . . .	20
3.1.5	PID Controller: . . . . .	20
3.1.6	Anti-Windup feature . . . . .	20
3.2	Implementation details . . . . .	21
3.2.1	Hardware setup and peripheral list . . . . .	21
3.2.2	Motor and Encoder . . . . .	21
3.2.3	PWM . . . . .	22
3.3	Exercises . . . . .	22
3.3.1	Exercise1 . . . . .	22
3.3.2	Exercise2 . . . . .	26
3.3.3	Exercise Bonus . . . . .	26
<b>4</b>	<b>Laboratory 4: Line Following</b>	<b>29</b>
<b>A</b>	<b>Section in the Appendix</b>	<b>33</b>
A.1	Subsection in the Appendix . . . . .	33

## 0 Abstract

During this course we worked with a turtlebot that you can see in the Figure 1 The TurtleBot has several buttons, switches, and LEDs connected to the STM32F767 GPIOs

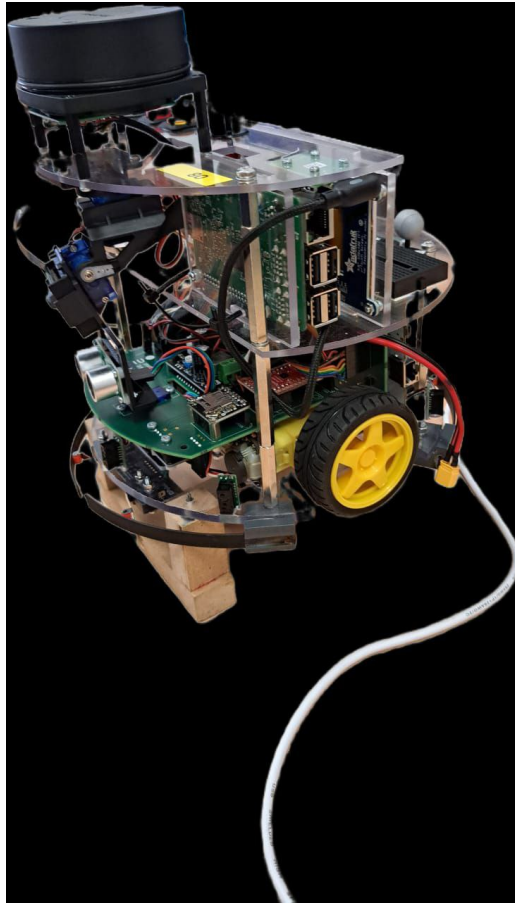


Figure 1: The TurtleBot

# 1 Laboratory 1: I2C

The purpose of this lab can be categorized like below:

- Inter-Integrated Circuit (I2C)
- SX1509 I/O Expander
- APIs

## 1.1 Description

This laboratory aims to explore and gain practical experience with some fundamental concepts in Embedded Systems. In particular, we will focus on working with the I2C protocol and the SX1509 module, as well as understanding and utilizing interrupts in the STM32F767 microcontroller. Throughout this laboratory, we will delve into several exercises that will provide us with hands-on experience in applying these concepts.

## 1.2 Inter-Integrated Circuit (I2C)

The I2C bus is a standard bidirectional interface that uses a controller, known as the master, to communicate with slave devices, Shown in Figure 2.

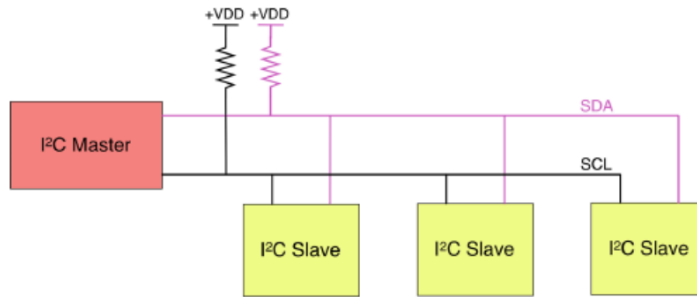


Figure 2: I2C Connection Scheme

A slave may not transmit data unless it has been addressed by the master. Each device on the I2C bus has a specific device address to differentiate between other devices that are on the same I2C bus. Many slave devices will require configuration upon startup to set the behavior of the device. This is typically done when the master accesses the slave's internal register maps, which have unique register addresses. A device can have one or multiple registers where data is stored, written, or read. Many slave devices will require configuration upon startup to set the behavior of the device. The physical I2C interface consists of the serial clock (SCL) and serial data (SDA) lines. Both SDA and SCL lines must be connected to VCC through a pull-up resistor. The size of the pull-up resistor is determined by the amount of capacitance on the I2C lines. Shown in Figure (3a) and Figure (3b)

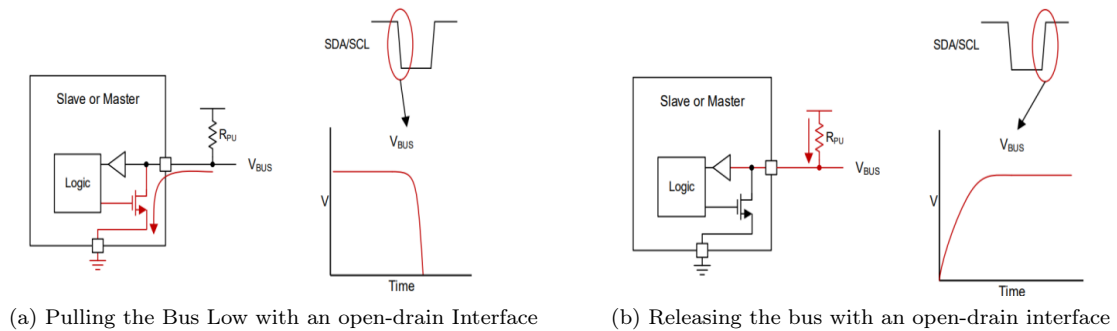


Figure 3

The protocol transmits messages composed by a 9 bit packet. Each message begins with the  $\mu C$  generation of a start signal and ends with a stop signal from the microcontroller, Shown in Figure 4. The start and stop

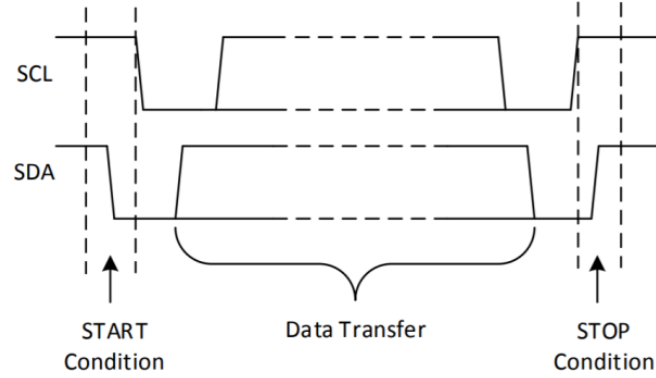


Figure 4: Example of Start and Stop condition

conditions are characterized by data line that moves towards low (start) or high (stop) during the clock high phase. Any other bit is set during the low clock phase; this ensure that the start and stop condition can be discriminated from any other data transmission.

In this communication protocol, each packet consists of 9 bits. The first 8 bits are transmitted by the sending unit, while the 9th bit is set by the receiving unit. The order of the bits within each byte follows a "Most Significant Bit" (MSB) format. The 9th bit serves as an acknowledgment, indicating whether the receiver acknowledges the data. To acknowledge, the receiver sets the data line to a low state at the 9th bit position. Example of Single Byte data transfer in Figure 5.

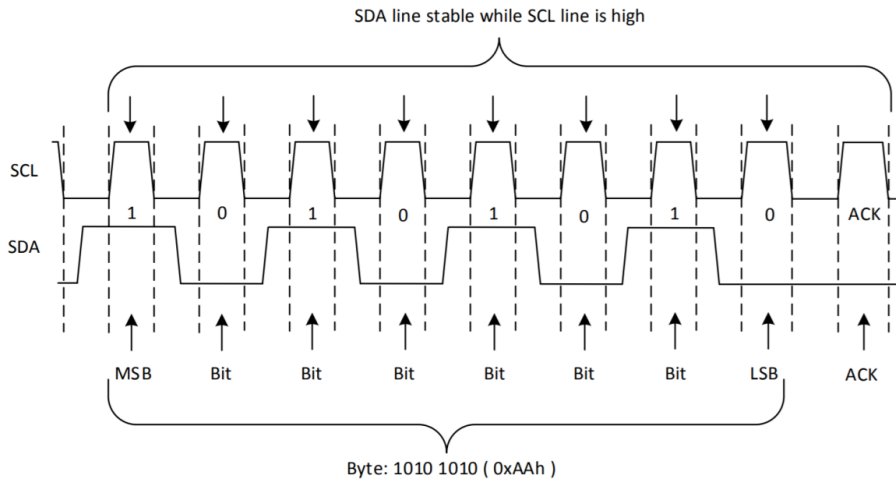


Figure 5: Example of Single Byte Data Transfer

### 1.3 SX1509 I/O Expander

The SX1509 is complete ultra low voltage 1.2V to 3.6V General Purpose parallel Input/Output (GPIO) expanders ideal for low power handheld battery powered equipment. This family of GPIOs comes in 4-, 8-, 16-channel configuration and allows easy serial expansion of I/O through a standard 400kHz I2C interface. GPIO devices can provide additional control and monitoring when the microcontroller or chipset has insufficient I/O ports, or in systems where serial communication and control from a remote location is advantageous. Keypad application is also supported with the on-chip scanning engine which enables continuous keypad monitoring up to 64 keys without any additional host interaction and further reduce the bus activity. The SX1509 has the ability to generate mask-programmable interrupts based on falling/rising edge of any of its GPIO lines.

In this setup, two SX1509 modules are connected to the microcontroller using the I2C bus. Both devices share the same I2C line, specifically I2C1. To differentiate between the two modules, we assign a specific slave

address to each. The first SX1509, referred to as `sx1509_1`, is assigned the slave address 0x3E, while the second module, known as `sx1509_2`, is associated with the slave address 0x3F. Allocated addresses of slaves implemented in Code 1

Listing 1: I2C Addresses

---

```
1 #define SX1509_I2C_ADDR1 0x3E           //SX1509 Proxy Sensors I2C address
2 #define SX1509_I2C_ADDR2 0x3F           //SX1509 Keypad I2C address
```

---

The two lines of Code 2 are addressing of SX1509 registers for Keypad.

Listing 2: Keypad Data registers

---

```
1 #define REG_KEY_DATA_1 0x27             //RegKeyData1 Key value (column) 1111 1111
2 #define REG_KEY_DATA_2 0x28             //RegKeyData2 Key value (row) 1111 1111
```

---

This addressing scheme allows the microcontroller to communicate with each SX1509 module individually over the shared I2C bus. Figure 6

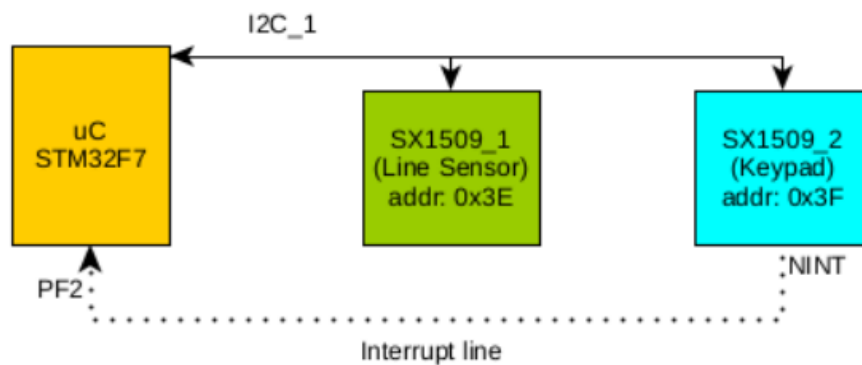


Figure 6: SX1509 connected to Keypad and Line sensor

## 1.4 APIs

The HAL (Hardware Abstraction Layer) API (Application Programming Interface) is a software layer provided by STM32 microcontrollers that abstracts the underlying hardware functionalities and provides a standardized interface for developers to interact with the microcontroller's peripherals and features. The HAL API serves as a bridge between the application software and the hardware, allowing developers to access and control the microcontroller's peripherals, such as GPIO (General Purpose Input/Output), UART (Universal Asynchronous Receiver-Transmitter), SPI (Serial Peripheral Interface), I2C (Inter-Integrated Circuit), timers, and more. It provides a higher-level programming interface, hiding the low-level hardware details and offering a set of functions that encapsulate complex hardware operations.

Following are useful HAL functions that we used during this Laboratory.

Listing 3: Reading Register values

---

```
1 HAL_StatusTypeDef HAL_I2C_Mem_Read(I2C_HandleTypeDef *hi2c, uint16_t
2   DevAddress, uint16_t MemAddress, uint16_t MemAddSize, uint8_t *pData,
3   uint16_t Size, uint32_t Timeout);
```

---

Read an amount of data in blocking mode from a specific memory address

- **hi2c** Pointer to a `I2C_HandleTypeDef` structure that contains the configuration information for the specified I2C.
- **DevAddress** Target device address: The device 7 bits address value in datasheet must be shifted to the left before calling the interface.
- **MemAddress** Internal memory address
- **MemAddSize** Size of internal memory address
- **pData** Pointer to data buffer

- **Size** Amount of data to be sent
- **Timeout** Timeout duration
- **return value** HAL status

Listing 4: Writing Register values

---

```

1 HAL_StatusTypeDef HAL_I2C_Mem_Write(I2C_HandleTypeDef *hi2c, uint16_t
2   DevAddress, uint16_t MemAddress, uint16_t MemAddSize, uint8_t *pData,
3   uint16_t Size, uint32_t Timeout)

```

---

Write an amount of data in blocking mode to a specific memory address

- **hi2c** Pointer to a I2C\_HandleTypeDef structure that contains the configuration information for the specified I2C.
- **DevAddress** Target device address: The device 7 bits address value in datasheet must be shifted to the left before calling the interface.
- **MemAddress** Internal memory address
- **MemAddSize** Size of internal memory address
- **pData** Pointer to data buffer
- **Size** Amount of data to be sent
- **Timeout** Timeout duration
- **return value** HAL status

## 1.5 Exercise 1:

### 1.5.1 Description

In this exercise we are asked to write an ISR that recognize and correctly handles the keypad interrupts. We properly implemented the void HAL\_GPIO\_EXTI\_Callback(uint16\_t pin) function, which is used in conjunction with the EXTI (External Interrupt) peripheral to handle interrupts generated by GPIO pins. Then we printed which interrupt has been triggered i.e. the pin. To be able to receive another interrupt from the keypad, we read the registers REG\_KEY\_DATA\_1 and REG\_KEY\_DATA\_2 inside the ISR.

### 1.5.2 Code

Listing 5: Interrupt Callback

---

```
1 void HAL_GPIO_EXTI_Callback(uint16_t GPIO_Pin){
2     /*Reading Data From SX1509_I2C_ADDR2 Device Address and REG_KEY_DATA_1 and
3     REG_KEY_DATA_2 Memory Addresses */
4     HAL_StatusTypeDef status;
5     status = HAL_I2C_Mem_Read(
6         &hi2c1,
7         SX1509_I2C_ADDR2 << 1,
8         REG_KEY_DATA_1,
9         1,
10        &colum,
11        1,
12        I2C_TIMEOUT
13    );
14    if (status != HAL_OK) {
15        printf("Error occurred during reading I2C, REG_KEY_DATA_1\n");
16    }
17    status = HAL_I2C_Mem_Read(
18        &hi2c1,
19        SX1509_I2C_ADDR2 << 1,
20        REG_KEY_DATA_2, 1,&row,
21        1,
22        I2C_TIMEOUT
23    );
24    if (status != HAL_OK) {
25        printf("Error occurred during reading I2C, REG_KEY_DATA_2\n");
26    }
27    printf("Interrupt on pin (%d).\n", GPIO_Pin);
28 }
```

---

### 1.5.3 Code Explanation:

The provided code is an ISR (HAL\_GPIO\_EXTI\_Callback) that handles GPIO interrupts generated by a keypad. It uses I2C communication to read data from an SX1509 device. The code reads the values from REG\_KEY\_DATA\_1 and REG\_KEY\_DATA\_2 registers in the SX1509 device to retrieve information about the keypad input. The colum and row variables store the read data, representing the column and row information of the pressed key, respectively. If any errors occur during the I2C read operations, corresponding error messages are printed. Finally, the code prints a message indicating the GPIO pin that triggered the interrupt.



## 1.6 Exercise 2:

### 1.6.1 Description:

In this exercise we had to extend the code of exercise 1 to handle the keypad interrupt. we printed which keypad button has been pressed.

### 1.6.2 Code:

Listing 6: Pressed Keypad Button

---

```
1  const char keypadLayout[4][4] = {
2      {'*', '0', '#', 'D'},
3      {'7', '8', '9', 'C'},
4      {'4', '5', '6', 'B'},
5      {'1', '2', '3', 'A'}
6  };
7  int column, row;
8  char triggeredChar;
9  int columnDir [4]= { 3, 2 ,1 ,0};
10 int getIndex(int value);
11
12 void HAL_GPIO_EXTI_Callback(uint16_t GPIO_Pin){
13
14     HAL_StatusTypeDef status;
15     status = HAL_I2C_Mem_Read(
16         &hi2c1,
17         SX1509_I2C_ADDR2 << 1,
18         REG_KEY_DATA_1,
19         1,
20         &column,
21         1,
22         I2C_TIMEOUT
23     );
24     if (status != HAL_OK) {
25         printf("Error occurred during reading I2C, REG_KEY_DATA_1\n");
26     }
27     status = HAL_I2C_Mem_Read(
28         &hi2c1,
29         SX1509_I2C_ADDR2 << 1,
30         REG_KEY_DATA_2, 1,&row,
31         1,
32         I2C_TIMEOUT
33     );
34     if (status != HAL_OK) {
35         printf("Error occurred during reading I2C, REG_KEY_DATA_2\n");
36     }
37     printf("Interrupt on pin (%d).\n", GPIO_Pin);
38     printf("column.raw (%d)    row.raw (%d).\n", column, row);
39     column = getIndex (column);
40     row = getIndex(row);
41     printf("column (%d)    row (%d).\n", column, row);
42     triggeredChar = keypadLayout[row][column];
43 } //End of Interrupt Callback function
44 int getIndex(int value){
45     switch (value){
46         case 247:
47             return 3;
48         case 251:
49             return 2;
50         case 253:
51             return 1;
```

```
52     case 254:
53         return 0;
54     default:
55         return 99;
56     }
57 }
```

---

### 1.6.3 Code Explanation:

In this exercise, the code has been extended to handle keypad interrupts. The ‘HAL\_GPIO\_EXTI\_Callback’ function is responsible for handling GPIO interrupts triggered by the keypad. The code reads the values from ‘REG\_KEY\_DATA\_1’ and ‘REG\_KEY\_DATA\_2’ registers in the SX1509 device using I2C communication. After reading the values, the code prints the GPIO pin that triggered the interrupt, as well as the raw values of ‘column’ and ‘row’. These raw values are then processed using the ‘getIndex’ function to obtain the corresponding column and row indices in the keypad layout. The ‘getIndex’ function takes a value as an input, which represents the raw value of ‘column’ or ‘row’. It compares the value with predefined values and returns the corresponding index. If the value doesn’t match any of the predefined values, it returns a default value of 99. Finally, the code uses the obtained column and row indices to access the ‘keypadLayout’ array and assigns the corresponding character to the ‘triggeredChar’ variable, representing the keypad button that has been pressed. Overall, the extended code reads the state of the keypad from the SX1509 device, converts the raw values to column and row indices, and determines the specific keypad button that has been pressed based on the indices.

## 1.7 Exercise 3:

### 1.7.1 Description:

In this exercise we had to write a routine that reads the status of the line sensor and prints it. The routine checks the status with a polling period of 100ms.

### 1.7.2 Code:

Listing 7: Reading Line Data

---

```
1  int findBinary(int decimal){
2      int base = 1;
3      int binary = 0;
4      while(decimal > 0){
5          int rem = decimal % 2;
6          binary = binary + rem*base;
7          decimal = decimal / 2;
8          base = base * 10;
9      }
10     printf("Binary: %d\n\r", binary);
11 }//End of findBinary Function
12 int lineData;
13 while (1){
14     HAL_I2C_Mem_Read(
15         &hi2c1,
16         SX1509_I2C_ADDR1 << 1,
17         REG_DATA_B,
18         1,
19         &lineData,
20         1,
21         I2C_TIMEOUT
22     );
23     findBinary(lineData);
24     printf("Decimal is: %d \n\r", lineData);
25     HAL_Delay(100);
26 }//End of While loop
```

---

## 1.8 Exercise 4:

### 1.8.1 Description:

We made one LED blinking. If you use LEDs connected to PE5 or PE6, check the \*.ioc to make sure that those pins are set as GPIO\_output. The blinking frequency should be set by the user through the keypad. There's two way to do this: Hard way (Bonus): The frequency can be set "dynamically" by the user. For example, if the user press 125# the LED should blink with a frequency of 125Hz. If the user press 250# the LED should blink with a frequency of 250Hz, and so on.

### 1.8.2 Code:

Listing 8: C code using listings

---

```
1 //These are Global Variables//
2 int inputUser = 0;
3 int counter = 0;
4 int flag=0;
5 int freq;
6
7 //This part of code has implemented in the Interrupt Callback Function
8 triggeredChar = keypadLayout[row][column];
9 if(flag == 1){
10     freq = inputUser;
11     inputUser = 0;
12     counter = 0;
13     flag = 0;
14 }
15 if((triggeredChar <= '9') && (triggeredChar >= '0')){
16     keypadFreq = (int)(triggeredChar - '0');
17     inputUser = inputUser*(10^counter) + keypadFreq;
18     counter++;
19 }
20 printf("Triggered Char: %c \n\r ", triggeredChar);
21 //End of Interrupt Callback function
22
23
24 //Start infinit loop
25 while (1){
26     if(triggeredChar == '#'){
27         flag = 1;
28         HAL_GPIO_TogglePin(GPIOE, GPIO_PIN_5);
29         if(inputUser != 0){
30             HAL_Delay((1.0/inputUser)*1000);
31         }
32         else{
33             HAL_Delay(1000);
34         }
35     } //End of if(triggerChar ..)
36     else{
37         HAL_GPIO_TogglePin(GPIOE, GPIO_PIN_5);
38         if(freq != 0){
39             HAL_Delay((1.0/freq)*1000);
40         }
41         else{
42             HAL_Delay(1000);
43         }
44     }
45 } //End of While loop
```

---

### 1.8.3 Code Explanation:

The code we have is designed to control the blinking of an LED using a keypad for user input. It utilizes an interrupt callback function to capture keypad button presses and extract the frequency values entered by the user. When the user presses a button on the keypad, the callback function is triggered, and the character associated with the button press is obtained. The code checks if the user has completed entering the frequency by using a flag variable. If the flag is set, it means the user has finished entering the frequency, and the value is stored in the 'inputUser' variable. If the triggered character is a digit, it is converted to an integer and accumulated to form the complete frequency value. The 'counter' variable keeps track of the number of digits entered, allowing multi-digit frequencies to be entered. The main loop continuously toggles the LED pin based on the entered frequency. If the user has pressed the '#' button to complete the frequency input, the LED is toggled with a delay based on the calculated frequency. If a valid frequency is entered ('inputUser' is not zero), the delay is calculated as the inverse of the frequency. Otherwise, a default delay of 1 second (corresponding to a frequency of 1Hz) is used. It is important to note that the code provided assumes the availability of keypad layout and initialization code, as well as the necessary configuration for GPIO pins and interrupts. Additionally, some aspects such as resetting the variables after completing the LED blinking are missing and need to be added. Overall, this code enables users to dynamically set the blinking frequency of the LED using the keypad.

## 2 Laboratory 2: Open loop control (camera stabilizer)

In this lab we are going to implement an open loop stabilizer using the IMU and servo motors.

### 2.1 IMU

IMU stands for Inertial Measurement Unit. It is a device that is used to measure and report an object's specific force, angular rate, and sometimes the magnetic field surrounding it. IMUs are commonly used in various applications, including robotics, navigation systems, virtual reality, augmented reality, and motion capture.

An IMU typically consists of several sensors that work together to provide information about an object's motion and orientation:

- **Accelerometer:** Measures linear acceleration along different axes (typically three axes: X, Y, and Z). It detects changes in velocity and orientation, allowing the IMU to determine the object's acceleration and tilt. Figure (7)
- **Gyroscope:** Measures angular velocity or rate of rotation around different axes. It provides information about the object's rotational motion and helps track changes in orientation.
- **Magnetometer:** Measures the strength and direction of the magnetic field around the object. It is often included in IMUs to provide additional information for orientation estimation, especially when used in combination with accelerometers and gyroscopes.

By combining the data from these sensors, an IMU can estimate the object's orientation, position, and velocity relative to its initial state.

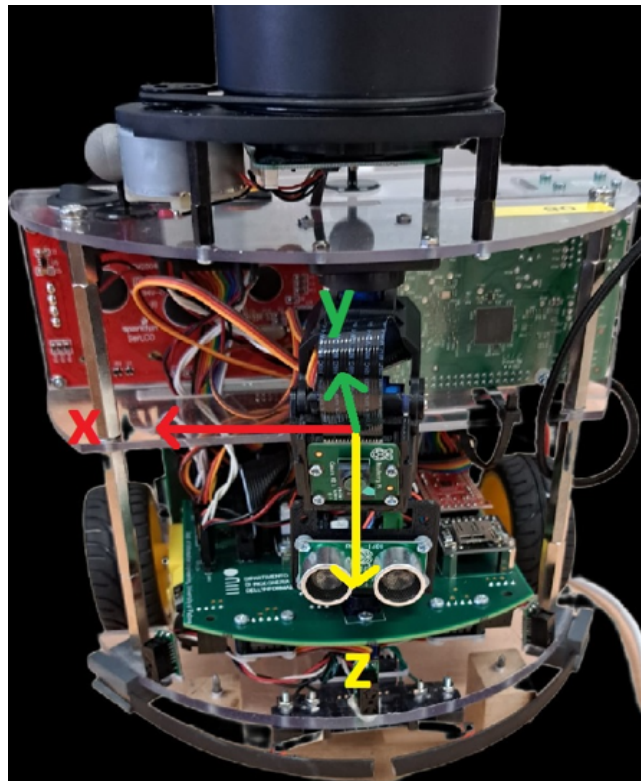


Figure 7: The axis of the accelerometer

- **Tilt** refers to the vertical movement of the camera, where the camera is moved up or down.
- **Pan** refers to the horizontal movement of the camera, where the camera is rotated around its vertical axis to the left or right.

## 2.2 Servo Motor

A servo motor is a type of motor that is widely used in various applications, particularly in robotics, automation, and control systems. It is designed to provide precise control over angular or rotational movement.

The distinguishing feature of a servo motor is its ability to maintain a specific position or follow a desired trajectory with great accuracy. It achieves this through a closed-loop control system, which continuously compares the actual position of the motor shaft with the desired position and adjusts the motor's output accordingly.

Here are some key components and characteristics of servo motors:

- **DC Motor:** Most servo motors are based on a DC motor as the primary driving mechanism. The DC motor converts electrical energy into rotational motion.
- **Gear Train:** Servo motors often include a gear train that reduces the motor's high-speed, low-torque output to a lower speed with higher torque. This gearing mechanism enables the servo motor to generate more precise and controlled movements.
- **Position Feedback Sensor:** A servo motor typically incorporates a position feedback sensor, such as an encoder or a potentiometer. This sensor provides information about the current position and velocity of the motor shaft. The feedback data is used by the control system to determine if the motor needs to adjust its position.
- **Control Circuitry:** The control circuitry of a servo motor includes a microcontroller or a dedicated servo controller. It receives the control signal or command from an external device, such as a microcontroller or a computer, and generates the appropriate electrical signals to drive the motor.
- **Pulse Width Modulation (PWM) Signal:** Servo motors commonly utilize a PWM signal to control their position and speed. The control signal consists of a series of pulses with varying widths, where the width of each pulse determines the desired position. The control circuitry interprets the pulse width and adjusts the motor's position accordingly. Figure (8)

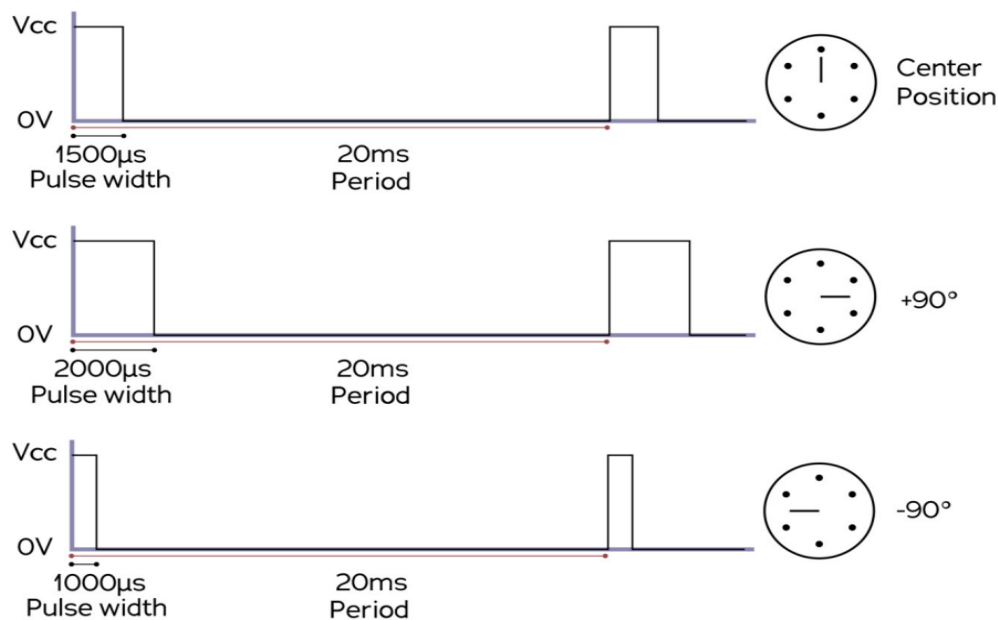


Figure 8: PWM signal and controlling the position of the motor

On the TurtleBot these are two servo that control the tilt and pan of a camera as shown in the figure below.  
Figure (9)

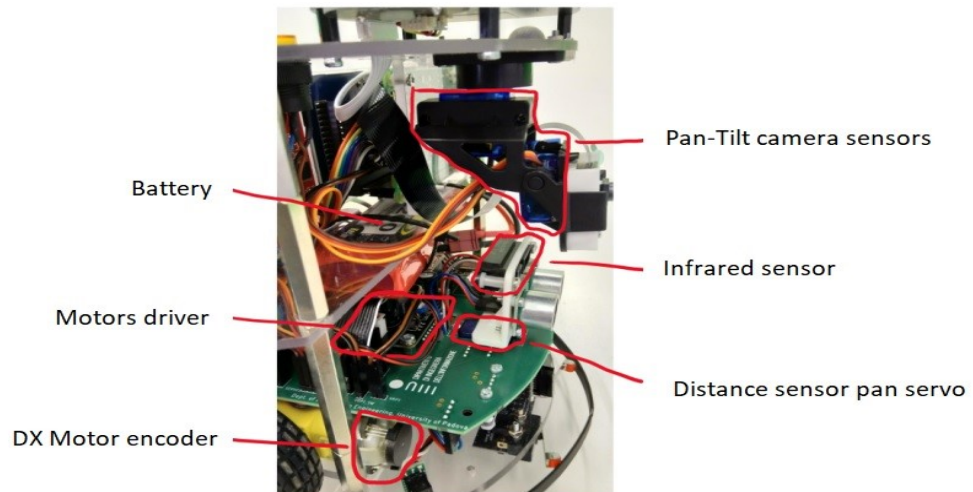


Figure 9: PWM signal and controlling the position of the motor

## 2.3 Exercise1:

Develop a control law to stabilize the camera's tilt by utilizing data from an IMU.  
First of all, we have to keep the camera aligned (0 degree) with the horizon. For this purpose, we should obtain the accelerometer and gyroscope data from the robot.

Listing 9: C code using listings

---

```

1
2     int8_t tilt = 0;
3     float angle = 0;
4     while (1) {
5
6         HAL_Delay(20);
7         bno055_convert_double_accel_xyz_msq(&d_accel_xyz);
8         angle = (asin(d_accel_xyz.y / 9.81)) * 180 / 3.14;
9         tilt = -angle;
10        logger_data.u1 = tilt;
11        logger_data.u2 = d_accel_xyz.y;
12        ertc_dlog_send(&logger, &logger_data, sizeof(logger_data));
13        ertc_dlog_update(&logger);
14
15        __HAL_TIM_SET_COMPARE(&htim1,
16                               TIM_CHANNEL_3,
17                               (uint32_t)saturate((150 + tilt * (50.0 / 5.0)),
18                                                  SERVO_MIN_VALUE,
19                                                  SERVO_MAX_VALUE));
20
21    }
```

---

As you see, first we defined tilt and angle globally. To obtain the accelerometer data we use “bno055\_convert\_double\_accel\_xyz\_msq” and “d\_accel\_xyz” as a pointer to a structure as input.



The formula for finding the tilt of Tbot is:  $\theta = \sin^{-1}\left(\frac{a_y}{g}\right)$  which  $\theta$  is the tilt angle,  $a_y$  is the acceleration measured on the y axis and g is gravity acceleration (=9.81). To convert  $\theta$  from radiant the equation should be multiplied by  $\left(\frac{180}{\pi}\right)$ . As we want to put the camera aligned we should put the tilt equal to  $(-\theta)$  otherwise the camera turns reverse.

For moving the camera we use “\_\_HAL\_TIM\_SET\_COMPARE” Which is a HAL library macro used for setting the compare value of a specific channel of a hardware timer on a microcontroller.

To record the data, we use datalogger. As all the configuration for using the datalogger is already done, first we define a structure to send the data:

---

```

1 struct ertc_dlog logger;
2
3 struct datalog {
4     float u1, u2;
5 } logger_data;
```

---

Then we use logger\_data.u1 as the tilt data and logger\_data.u2 as the acceleration measured on the y axis data in the while loop.

To plot the data we use Matlab and the serial datalogger is invoked using serial\_datalog() function as below:

---

```

1 data = serial_datalog('COM9',{ '2*single', '2*single'}, 'baudrate', 115200)
```

---

“COM9” is the port of the serial datalogger. “single,single” specifies the data format to be logged. It indicates that two data values will be logged in each iteration of the logging process. In this case, the logged data is expected to be of type single (a single-precision floating-point number).

“baudrate”, “115200” sets the baud rate of the serial communication. The baud rate determines the speed at which data is transferred over the serial port. In this case, the baud rate is set to 115200 bits per second.

## 2.4 Bonus:

Implement a control algorithm that implement a “smooth pan” control (i.e. a control system that compensate sharp horizontal rotations of the TBot) using data from the gyroscope.

Process is like exercise 1:

---

```

1     int8_t pan = 0;
2
3     float angle = 0;
4 while (1) {
5     HAL_Delay(20);
6     bno055_convert_double_gyro_xyz_rps(&d_gyro_xyz);
7     angle = d_gyro_xyz.z * 180 / 3.14;
8     pan = -angle/8;
9     logger_data.u1 = pan;
10    logger_data.u2 = d_gyro_xyz.z;
11    ertc_dlog_send(&logger, &logger_data, sizeof(logger_data));
12    ertc_dlog_update(&logger);
13    __HAL_TIM_SET_COMPARE(&htim1, TIM_CHANNEL_3,
14    (uint32_t)saturate((150+pan*(50.0/55.0)),
15    SERVO_MIN_VALUE,
16    SERVO_MAX_VALUE));
17 }
```

---

As it is clear to obtain the  $\theta$  we have to put the gyroscope data measured in z axis and we put the pan equal to  $(-\frac{\theta}{8})$  which the negative sign is because of turning up and down properly and is divided to 8 which is the proper gain, and inside the “\_\_HAL\_TIM\_SET\_COMPARE()”, as the channel 3 is controlling the pan, we should put “TIM\_CHANNEL\_3” instead of “TIM\_CHANNEL\_2” which is controlling the tilt.

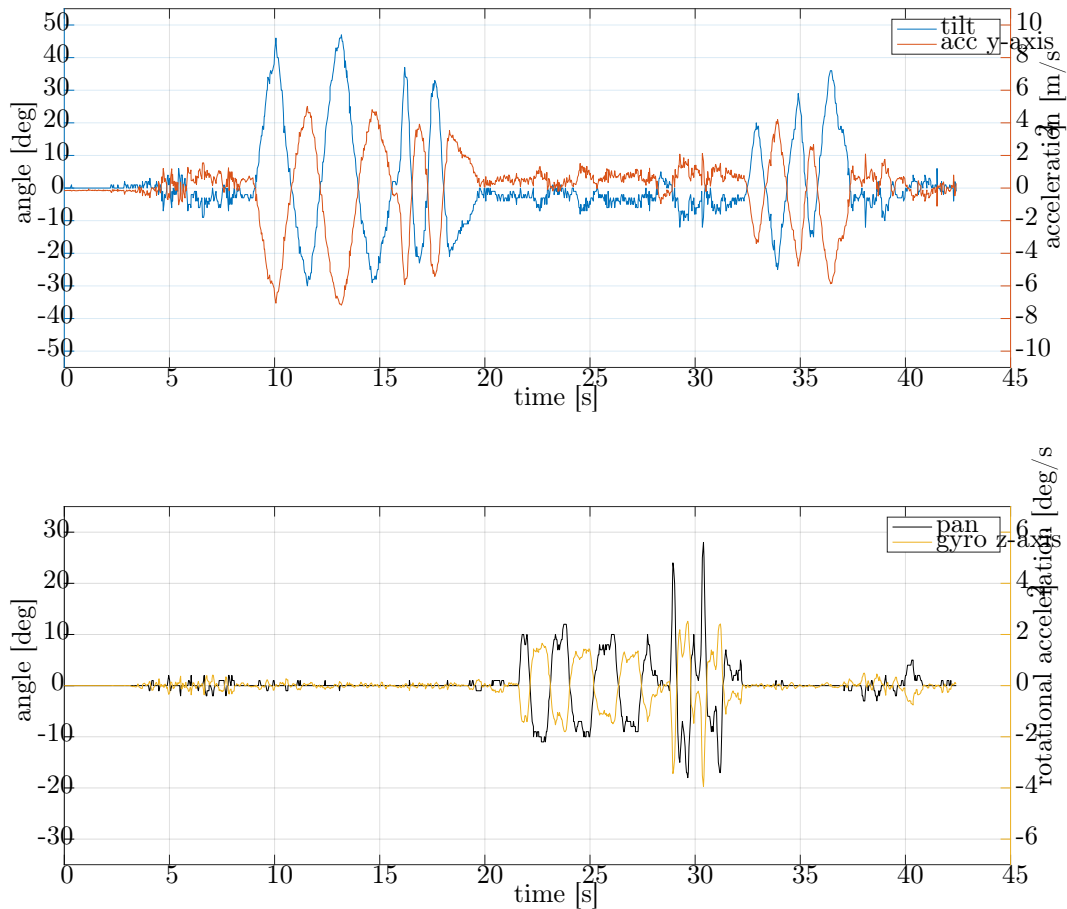


Figure 10: Datalogger Plot

### 3 Laboratory 3: Motor Control

#### 3.1 Description

The goal of this laboratory is to implement a controller in order to drive and control DC motors of the Turtle-Bot. To reach that goal, we have to design a PI controller, fed by angular speed of the wheel, measured in round per minute [rpm], as the reference signal, in order to control the angular speed of the wheel, which is rotating under the action of a DC motor.

##### 3.1.1 DC Motor

A DC motor is a class of rotary electrical motors that converts direct current (DC) electrical energy into mechanical energy. There are three common parts in all types of DC motors:

- a stator, which can be implemented as a permanent magnet;
- a rotor winding or a coil, which can be simply a wire;
- a commutator is connected to the rotor winding and its purpose is to force the direction of the current flowing into the rotor to be always the same;

However, the DC motor which is used in the Turtle-Bot uses Brushed implementation. brushes are used to supply current to the commutator and each brush is connected to one side of the power supplier.

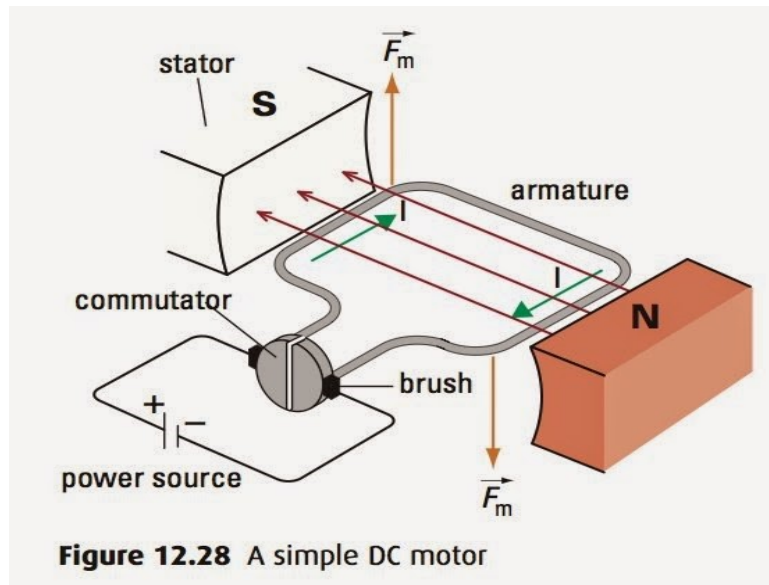


Figure 11: DC Motor simplified scheme

The stator generates a magnetic field and the rotor winding, which is positioned within the field generated by the stator, when a current flow through it, is subjected to a magnetic force perpendicular to the direction of the stator field. The commutator has a ring-like shape and present gaps, so that each part of the commutator is connected to power source of opposite polarity, ensuring the current flows in the proper direction.

Inverting the power source polarity, invert the direction of the current, allowing the motor to rotate in both directions.

### 3.1.2 DRV8871

Since we want to use a PWM as a control signal for the motor, we use a chip that can convert a PWM input into a proper output, both in terms of voltage and current, to drive the motor. For such purpose, the chosen chip is a DRV8871, which is a brushed DC motor driver. The motor can be controlled bidirectionally by implementing an H-bridge.

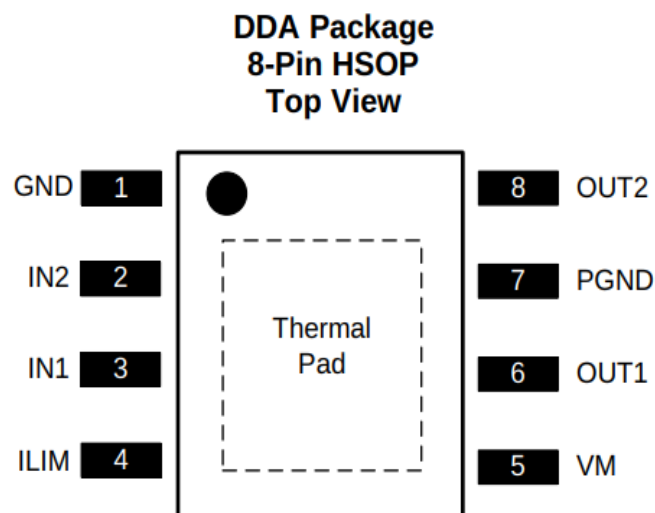


Figure 12: DRV8871 pinout

Below a description of some pins important to our case can be found.

Pin Name	Pin Number	Pin Type	Description
IN1	3	Input	Input of the chips that allow to control the output of the h-bridge. These pins receive the PWM signal from the microcontroller.
IN2	2	Input	" "
OUT1	6	Output	H-bridge output that goes to the motor
OUT2	8	Output	" "

The table below describes how the input signals can be used to control the output.

Mode Name	IN1	IN2	OUT1	OUT2
Coast	0	0	Hiz	Hiz
Reverse	0	1	L	H
Forward	1	0	H	L
Brake	1	1	L	L

Coast mode allows the motor to coast to a stop, which means that the motor is not driven and will move by inertia. On the other hand, Brake mode will stop the motor faster. When used to drive the motor with PWM control signal with a duty cycle  $< 100\%$  and, for example, in forward mode, it is possible to alternate between forward and brake mode or between forward and coast mode.

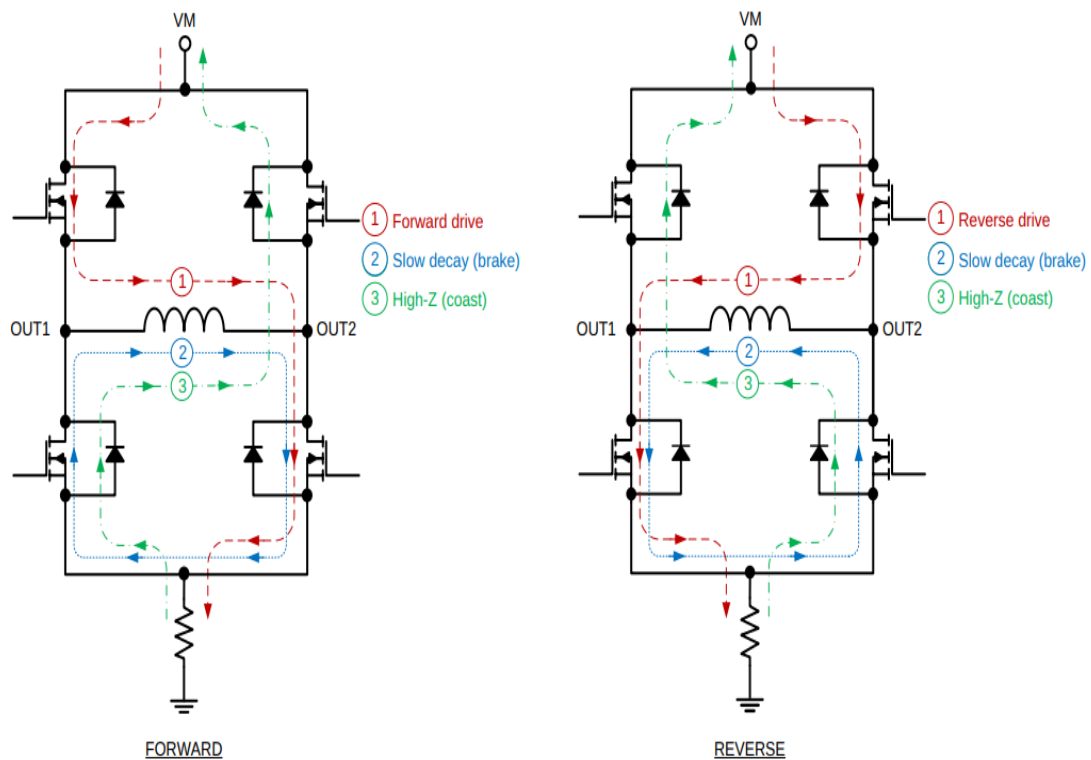


Figure 13: H-Bridge Current Paths

### 3.1.3 PWM Setting

The voltages applied to the inputs should have at least 800[ns] of pulse width to ensure detection. If the PWM frequency is 200[kHz], the usable duty cycle range is 16% to 84%.

### 3.1.4 Position Encoder

The position encoder is a sensor that transform a position information into an electrical signal. A quadrature encoder employs two outputs A and B which are called quadrature outputs, as they are 90 degrees out of phase; the direction of the motor depends on which phase's signal lead over the other;

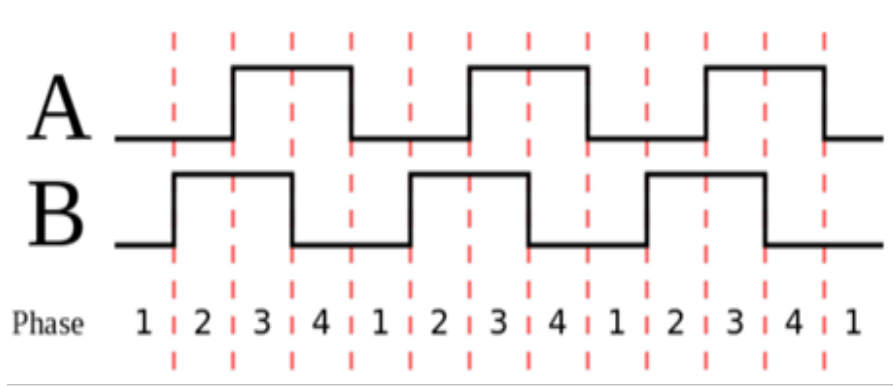


Figure 14: Signals generated by a quadrature encoder with B leading over A

A counter can be used to measure the number of pulses (a pulse can be counted when an edge happens).

### 3.1.5 PID Controller:

PID (Proportional Integral Derivative) controllers use a control loop feedback mechanism to control process variables and are the most accurate and stable controller. Using the derivative control mode is a bad idea when

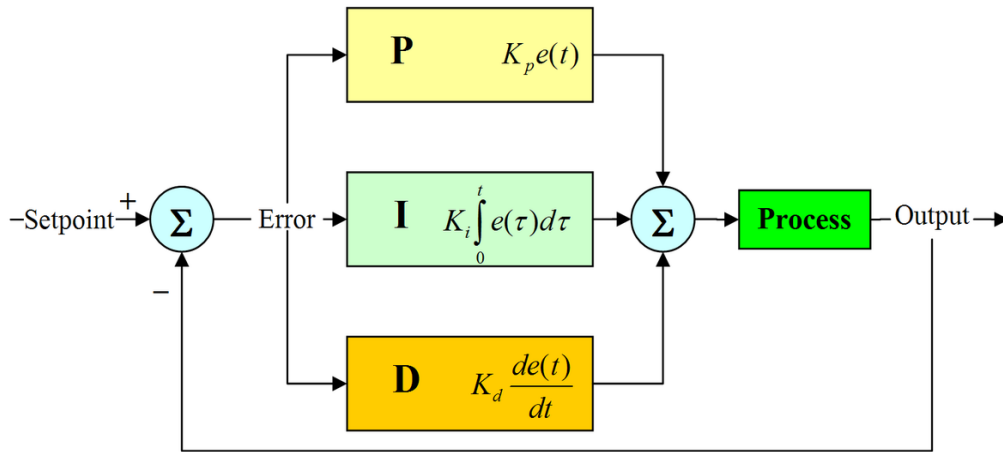


Figure 15: PID Controller diagram

the process variable has a lot of noise on it. 'Noise' is small, random, rapid changes in the process variable, and consequently rapid changes in the error. Because the derivative mode extrapolates the current slope of the error, it is highly affected by noise. Therefore, we only need to design and implement PI controller for this lab.

### 3.1.6 Anti-Windup feature

Integral windup refers to the situation in a PID controller where a large change in setpoint occurs (say a positive change) and the integral term accumulates a significant error during the rise (windup), thus overshooting and continuing to increase as this accumulated error is unwound (offset by errors in the other direction). The specific problem is the excess overshooting.

Integral windup can come from derivative action or a large reference. In our case, since we are not using the derivative control mode in our PID, only the reference may cause the overshooting.

In order to solve the problem, we need an Anti-windup architecture, basically a saturation over the control output of the integrator, that keeps the error caused by the integral term of the controller in a desired range and prevents accumulation of the error and consequently the overshooting. The figure below illustrates a common Anti-windup architecture.

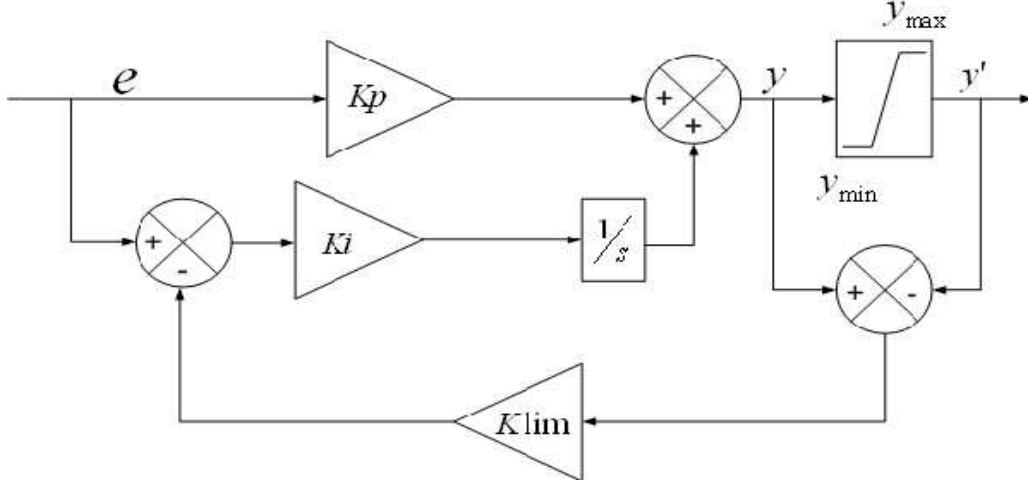


Figure 16: Anti-windup architecture

## 3.2 Implementation details

### 3.2.1 Hardware setup and peripheral list

- TIM3 (16-bit, general-purpose timer), channel 1 and channel 2: Encoder for motor 1
- TIM4 (16-bit, general-purpose timer), channel 1 and channel 2: Encoder for motor 2
- TIM6 (16-bit, basic timer): Provide the clock for the controller
- TIM8 (16-bit, advanced timer), channel 1 and channel 2: PWM for motor 1
- TIM8 (16-bit, advanced timer), channel 3 and channel 4: PWM for motor 2

### 3.2.2 Motor and Encoder

The module encompasses a gearbox with a 120:1 ratio, which means that for every round performed by the wheel, the motor rotates 120 times.

The encoder provides 16 pulses per round. This means that the number of pulses per round from the wheel-side is 1920, assuming to use encoder mode 2X; this number is doubled when considering encoder mode 4X. Notice that this mode halves the quantization error, when compared with the 2X mode.

The selected timer needs to be configured in encoder mode. Also, the counter period which can be setup to be equal to the number of pulses counted in one round (in our case 3840 since we are using 4X encoder mode) has to be taken into account.

Listing 10: encoder code in order to have the current speed of each motor

```

1 void HAL_TIM_PeriodElapsedCallback(TIM_HandleTypeDef *htim)
2 {
3     /* Speed ctrl routine */
4     if(htim->Instance == TIM6)
5     {
6         uint32_t TIM3_CurrentCount , TIM4_CurrentCount;
7         int32_t TIM3_DiffCount , TIM4_DiffCount;
8         static uint32_t TIM3_PreviousCount = 0, TIM4_PreviousCount = 0;
9
10        // read the counter value from the encoder
11        TIM3_CurrentCount = __HAL_TIM_GET_COUNTER(&htim3);

```

```

12     TIM4_CurrentCount = __HAL_TIM_GET_COUNTER(&htim4);
13
14     //compute the difference between the current value and the old value
15     /* evaluate increment of TIM3 counter from previous count */
16     if (__HAL_TIM_IS_TIM_COUNTING_DOWN(&htim3)) // right motor
17     {
18         /* check for counter underflow */
19         if (TIM3_CurrentCount <= TIM3_PreviousCount)
20             TIM3_DiffCount = TIM3_CurrentCount - TIM3_PreviousCount;
21         else
22             TIM3_DiffCount = -((TIM3_ARR_VALUE+1) - TIM3_CurrentCount)
23                             - TIM3_PreviousCount;
24     }
25     else
26     {
27         /* check for counter overflow */
28         if (TIM3_CurrentCount >= TIM3_PreviousCount)
29             TIM3_DiffCount = TIM3_CurrentCount - TIM3_PreviousCount;
30         else
31             TIM3_DiffCount = ((TIM3_ARR_VALUE+1) - TIM3_PreviousCount)
32                             + TIM3_CurrentCount;
33     }
34
35     TIM3_PreviousCount = TIM3_CurrentCount;
36     if (__HAL_TIM_IS_TIM_COUNTING_DOWN(&htim4)) // left motor
37     {
38         /* check for counter underflow */
39         if (TIM4_CurrentCount <= TIM4_PreviousCount)
40             TIM4_DiffCount = TIM4_CurrentCount - TIM4_PreviousCount;
41         else
42             TIM4_DiffCount = -((TIM4_ARR_VALUE+1) - TIM4_CurrentCount)
43                             - TIM4_PreviousCount;
44     }
45     else
46     {
47         /* check for counter overflow */
48         if (TIM4_CurrentCount >= TIM4_PreviousCount)
49             TIM4_DiffCount = TIM4_CurrentCount - TIM4_PreviousCount;
50         else
51             TIM4_DiffCount = ((TIM4_ARR_VALUE+1) - TIM4_PreviousCount)
52                             + TIM4_CurrentCount;
53     }
54
55     TIM4_PreviousCount = TIM4_CurrentCount;

```

---

### 3.2.3 PWM

Configuration for the timer generating the PWM signal (TIM8):

- Clock source: APB1-Timer\_clocks at 96[MHz];
- Prescaler (PSC): 959  $\rightarrow f_T = 96 * (\frac{106}{96}) * 10 = 105[Hz]$
- Counter period (Auto Reload Register): 399  $\rightarrow T_{PWM} = 4 * 102 * 10[s]$

## 3.3 Exercises

### 3.3.1 Exercise1

In order to control the DC motors, we use a PI Controller.

By using the encoders (TIM3, TIM4), implemented in the way that has been explained in section 3.2.2, the number of pulses for each wheel is available. Considering that the counter period is the number of pulses per

round from each wheel-side (in our case since we are using the 4x mode, it is 3840), we can evaluate the speed of the motors in round per minutes as follow:

$$\text{speed[rpm]} = \frac{\text{number of pulses}}{3840} * \frac{60}{T_s}$$

Which  $T_s$  is the sampling time. We also define the reference for the speed of each motor in rpm, which are hardcoded. Therefore, we can calculate the tracking error which will be considered as the input of the function PI\_controller. The output of the function is the control signal (in rpm) used to control the DC motors.

Listing 11: calculating the control signal for DC motors in rpm

---

```

1 // compute the motor speed in [rpm]
2 float current_rpm_R = ((float)TIM3_DiffCount/(2.0*1920.0))*(60.0/TS );
3 tracking_error_R = reference_rpm_R - current_rpm_R;
4
5 float current_rpm_L = ((float)TIM4_DiffCount/(2.0*1920.0))*(60.0/TS );
6 tracking_error_L = reference_rpm_L - current_rpm_L;
7
8 // compute the tracking error via PI controller
9 controller_return_R = PI_controller(tracking_error_R);
10 controller_return_L = PI_controller(tracking_error_L);
11
12 motor_V_R = controller_return_R;
13 motor_V_L = controller_return_L;
```

---

We establish the closed loop according to the following logic: The input of the function PI\_controller is the tracking error. The error signal is multiplied in parallel by two parameters, the first is proportional gain Kp producing the proportional term, and the second is the product of integral gain Ki and the sampling period TS, producing the integral term.

To avoid overshooting in the response, caused by accumulation of the integrator error, we set up an Anti-windup scheme which is a saturation over  $E_I$ . The threshold of the error which is 10 has been selected by trial and error. The optimal values of the Kp and Ki are found by trial and error.

Listing 12: PI Controller

---

```

1 float Kp = 0.34;
2 float KI = 0.2;
3
4 float PI_controller (float error){
5     float P = Kp * error;
6     static float I = 0;
7     I = I + error * KI * TS;
8     if(I>10){ // anti windup
9         I=10;
10    }
11    return P + I;
12 }
```

---

After summing up the proportional and integral term and producing the output of the function (control signal in rpm), it will be fed to the DC motors through TIM8 as PWM signals. Notice that TIM6 is acting as a clock in the system. All the steps needed to accomplish the goal, should be executed from inside the HAL\_TIM\_PeriodElapsedCallback function, which is a callback function called when a timer's period is elapsed.

Since we are assuming a linear relationship between the duty cycle and the voltage applied to the motor, which we supposed to be in the range offering  $[0, V_{PowerSupply}]$ .  $V_{PowerSupply}$  depending on the power supply source, is equal to  $V_{BAT} = 8[v]$



Listing 13: calculating duty cycle

---

```

1 #define VBATT      8.0
2 #define V2DUTY    ((float)(TIM8_ARR_VALUE+1)/VBATT)
3 #define DUTY2V    ((float)VBATT/(TIM8_ARR_VALUE+1))
4
5 // calculate duty cycle for motor
6
7 int32_t duty_R = V2DUTY*motor_V_R;
8
9 int32_t duty_L = V2DUTY*motor_V_L;

```

---

According to the Counter Period of TIM6, generating the PWM signal, a saturation of 399 is set over each duty cycle to prevent over driving the motors.

Listing 14: calculating duty cycle and command the motors

---

```

1 // calculate duty cycle for motor
2 int32_t duty_R = V2DUTY*motor_V_R;
3 int32_t duty_L = V2DUTY*motor_V_L;
4
5 if (duty_R > 399)
6     duty_R = 399;
7
8 /* calculate duty properly */
9 if (duty_R >= 0) { // rotate forward
10     // alternate between forward and coast
11     __HAL_TIM_SET_COMPARE(&htim8, TIM_CHANNEL_1, (uint32_t)duty_R);
12     __HAL_TIM_SET_COMPARE(&htim8, TIM_CHANNEL_2, 0);
13
14     // alternate between forward and brake, TIM8_ARR_VALUE is a define
15     __HAL_TIM_SET_COMPARE(&htim8, TIM_CHANNEL_1,
16         (uint32_t)TIM8_ARR_VALUE);
17     __HAL_TIM_SET_COMPARE(&htim8, TIM_CHANNEL_2,
18         (uint32_t)(TIM8_ARR_VALUE - duty_R));
19 } else { // rotate backward
20     __HAL_TIM_SET_COMPARE(&htim8, TIM_CHANNEL_1, 0);
21     __HAL_TIM_SET_COMPARE(&htim8, TIM_CHANNEL_2, (uint32_t)-duty_R);
22 }
23
24 if (duty_L > 399)
25     duty_L = 399;
26
27 /* calculate duty properly */
28 if (duty_L >= 0) { // rotate forward
29     // alternate between forward and coast
30     __HAL_TIM_SET_COMPARE(&htim8, TIM_CHANNEL_3, (uint32_t)duty_L);
31     __HAL_TIM_SET_COMPARE(&htim8, TIM_CHANNEL_4, 0);
32
33     // alternate between forward and brake, TIM8_ARR_VALUE is a define
34     __HAL_TIM_SET_COMPARE(&htim8, TIM_CHANNEL_3,
35         (uint32_t)TIM8_ARR_VALUE);
36     __HAL_TIM_SET_COMPARE(&htim8, TIM_CHANNEL_4,
37         (uint32_t)(TIM8_ARR_VALUE - duty_L));
38 } else { // rotate backward
39     __HAL_TIM_SET_COMPARE(&htim8, TIM_CHANNEL_3, 0);
40     __HAL_TIM_SET_COMPARE(&htim8, TIM_CHANNEL_4, (uint32_t)-duty_L);
41 }

```

---

Since we are implementing the control using the Forward/Break technique in Exercise 1, we set up the command to the motors in the way that is shown in Listing 14, and in the end, by using the data logger, we save and plot all relevant information. The set up is as follow:

Listing 15: setting up data logger

---

```

1 data.w1 = reference_rpm_R;
2 data.w2 = current_rpm_R;
3 data.u1 = tracking_error_R;
4 data.u2 = controller_return_R;
5
6
7 data.x1 = reference_rpm_L;
8 data.x2 = current_rpm_L;
9 data.y1 = tracking_error_L;
10 data.y2 = controller_return_L;
11
12 ertc_dlog_send(&logger, &data, sizeof(data));

```

---

The results are plotted as shown in below:

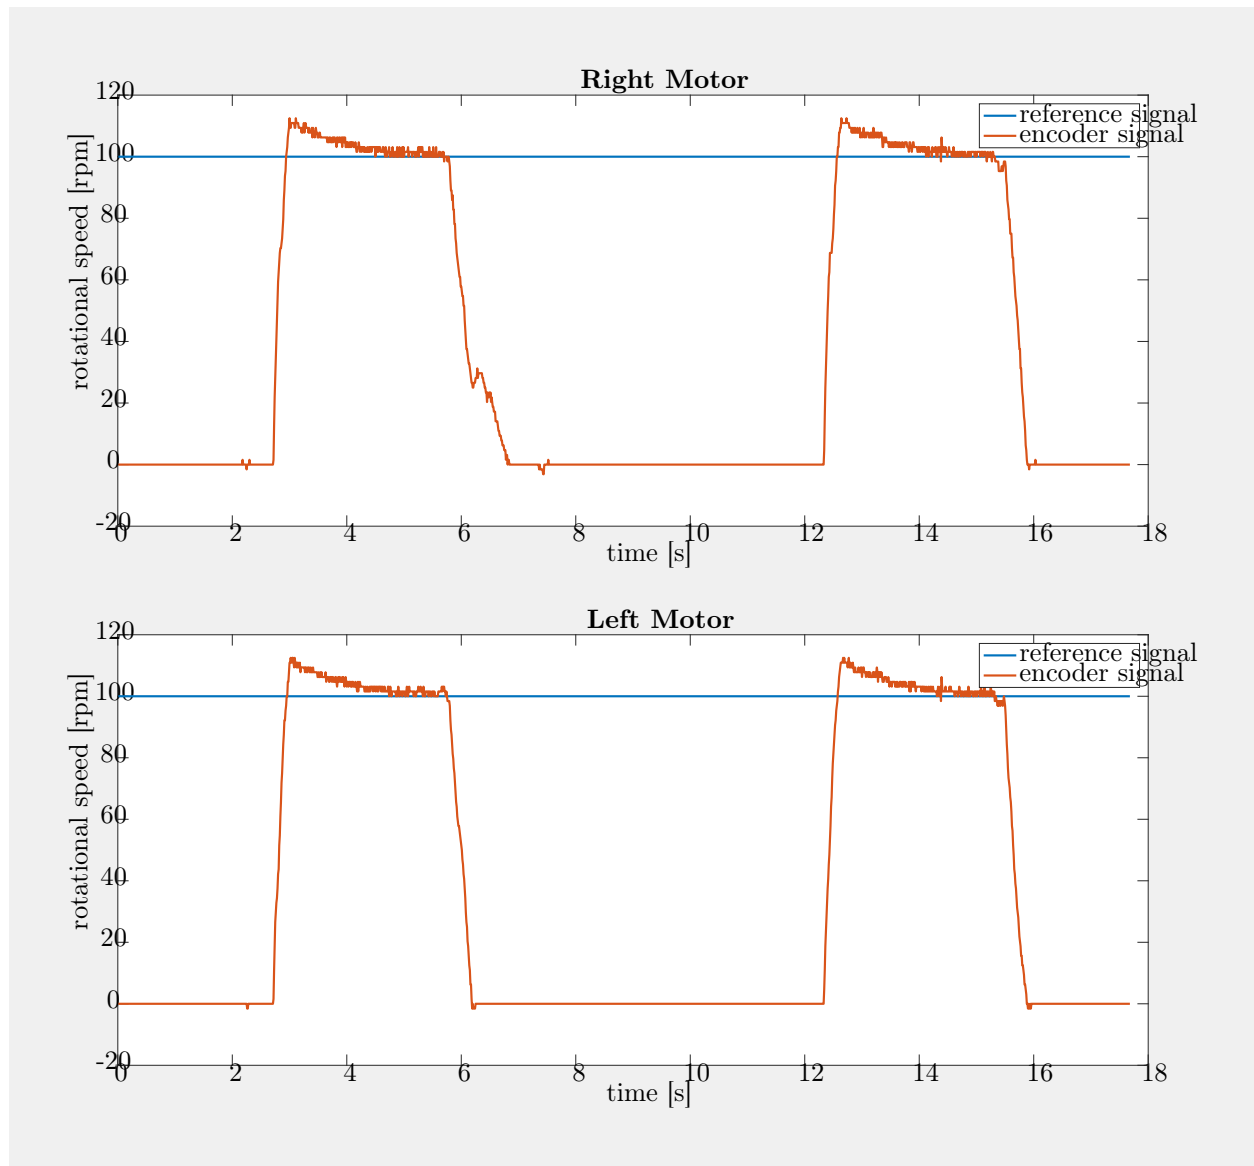


Figure 17: The results of the control using the Forward/Brake technique

To conclude, the results show that after turning on the motors, it takes a few milliseconds for motors to reach desired speed (acceptable rise time); even after being turned off for a while, the over-shoot does not go higher than a certain and reasonable level of speed (effect of the Anti-windup scheme). Lastly, the step response is settled at the reference value in few seconds. Notice that the noise in the response is because of the nature of the system and the digital controller.

### 3.3.2 Exercise2

In order to implement the controller with the Forward/Coast technique, we only need to change the alternative piece of code, showed in Listing 14. The result is illustrated in below:

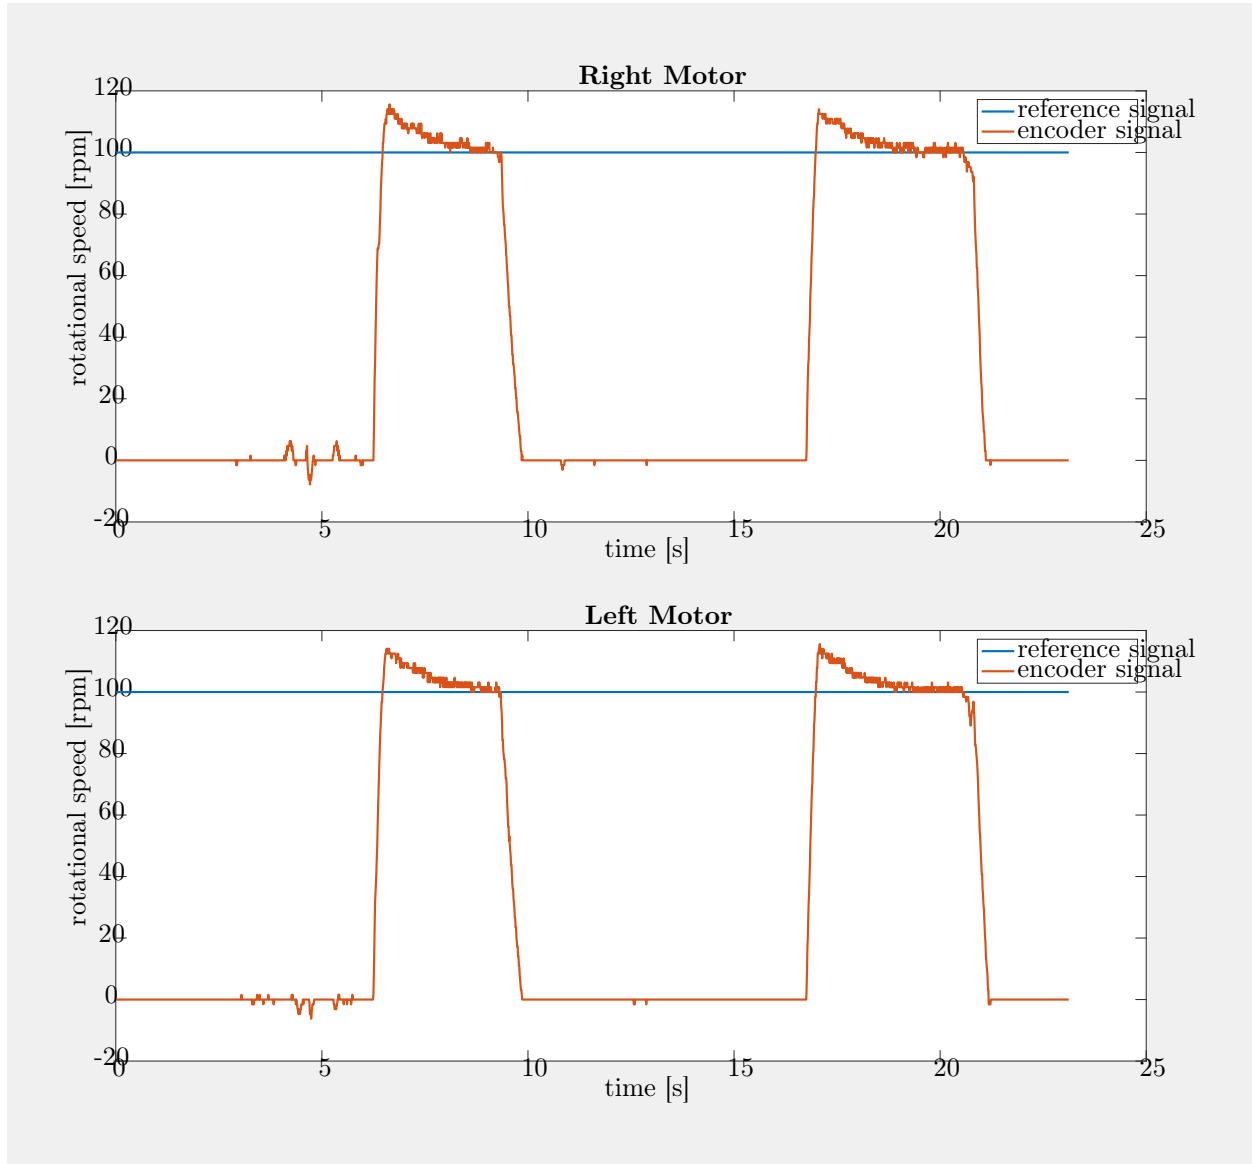


Figure 18: The results of the control using the Forward/Coast technique

Coast mode allows the motor to coast to a stop, which means that the motor is not driven and will move by inertia. On the other hand, brake mode will stop the motor faster. Therefore, the step response of motor implemented by Forward/Coast technique has more noises (even when the motor is set to be off) which can be interpreted as the inertia.

### 3.3.3 Exercise Bonus

The Anti-windup is implemented in the way that has been explained in section 3.3.1, particularly in Listing 12. As we mentioned before the threshold for the saturation has been chosen by trial and error. However, the first Anti-windup method we used was to set directly a saturation over the voltages fed to the motors. After saturating the voltage directly by changing the threshold to different values (for example, 4 in Listing 16), the

overshoot problem was still unsolved. Hence, we decided to change the Anti-windup method to saturating only the integral term of the control signal (which is the motor voltage), shown in Listing 12.

Listing 16: wrong Anti-windup method

```

1  if (motor_V_R > 4)
2      motor_V_R = 4;
3  if (motor_V_R < -4)
4      motor_V_R = -4;
5
6  if (motor_V_L > 4)
7      motor_V_L = 4;
8  if (motor_V_L < -4)
9      motor_V_L = -4;

```

The step response of the motors using both Forward/Break and Forward/Coast techniques, when the Anti-windup implementation is not used are shown in Figure 19 and Figure 20. To conclude, the step response of the system (no matter implemented by which technique), without implementing an Anti-windup feature, has a large overshoot due to the accumulation of the error caused by integral term. Adding an Anti-windup feature enhances the overall performance and reduced the overshoot in the system, as expected (Figure 17 and Figure 18).

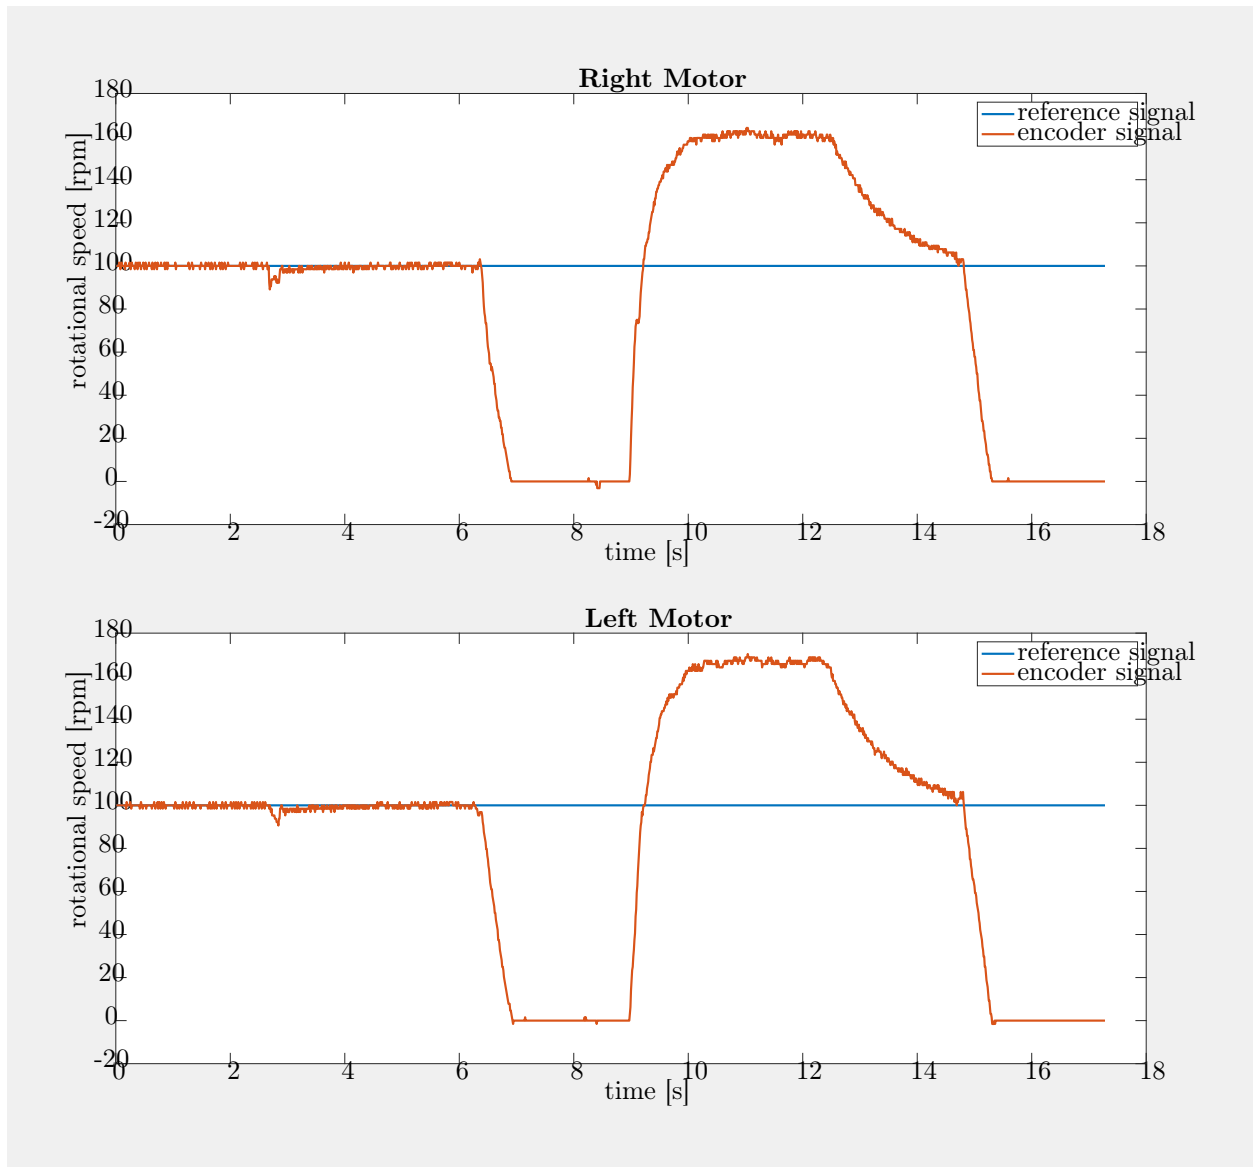


Figure 19: The results of the control using the Forward/Break technique without Anti-windup

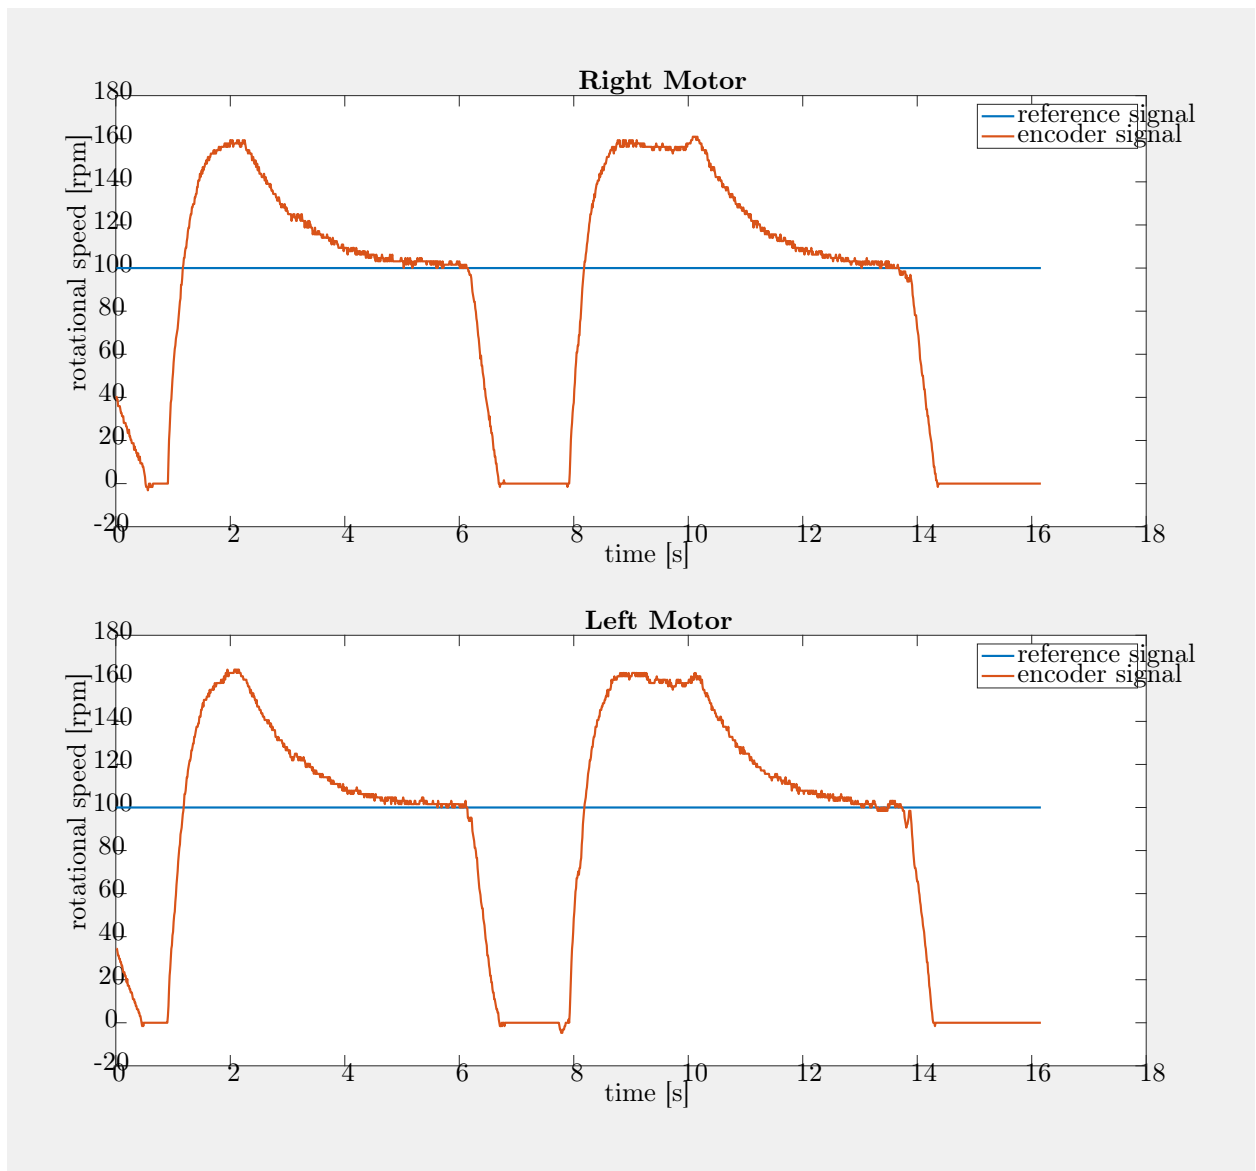


Figure 20: The results of the control using the Forward/Coast technique without Anti-windup

## 4 Laboratory 4: Line Following

The goal of this laboratory was to combine the line sensor from Lab 1 and the motor controller from Lab 3 to make the Turtlebot follow a given line autonomously.

- **The infrared line sensor:**

We are using a Pololu QTR reflectance sensor which can detect how much infrared light has been reflected from a surface. With a certain threshold we can then determine if a surface is dark or light. The installed sensor is located on the lower front of the robot. It is about 10 cm wide and consists of an array of 8 photo diodes with each one photo transistor. The distance between every sensor is 8 mm. This gives us a total of 8 individual sensors that can differentiate between dark and light areas. This data is retrieved by the controller MCU through a port expander board using a I2C connection. The sensor data encoded in a binary format and received as an integer. To retrieve the original data, it is necessary to convert the integer back to a binary number. This binary number has 8 bits, each storing the value of one sensor.

- **Properties of the line:**

The line is assumed to be wide enough to trigger at least one of the infrared sensors and at most two at the same time. The goal is to create a controller algorithm that keeps the line between the two middle sensors 3 and 4. We are implementing a tracking error and set this position to tracking error 0. We then define the tracking error to be greater than zero when the line is on the left side of the sensor. If the tracking error is less than zero, the line is on the right side of the sensor. Figure 21

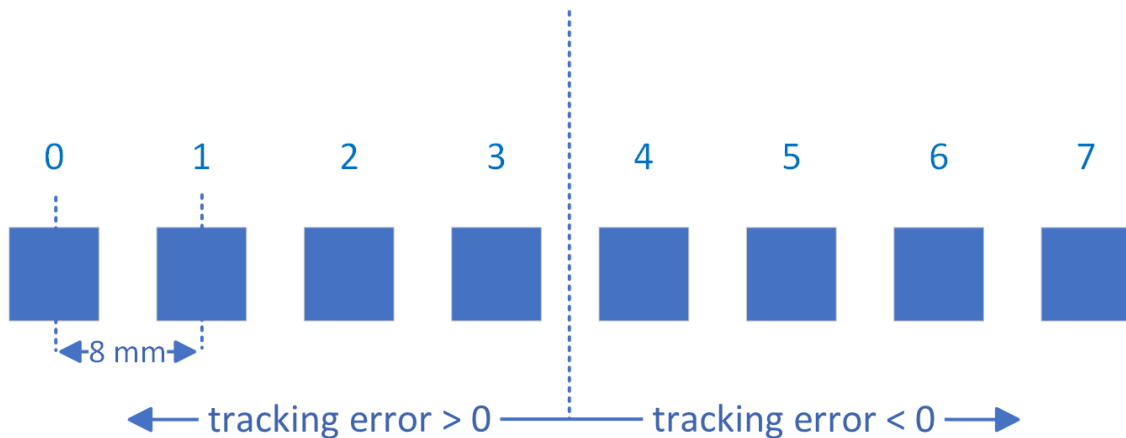


Figure 21: Spacing of the infrared sensors

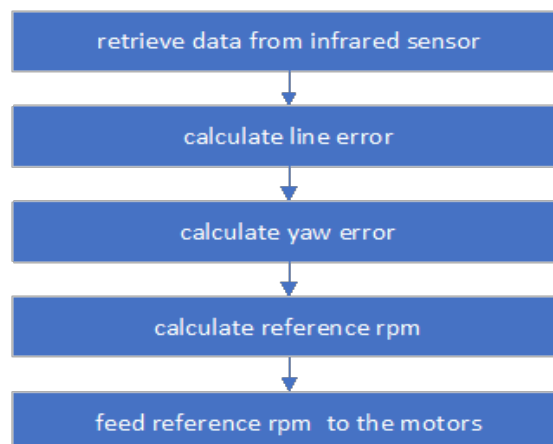


Figure 22: Main structure of the line following code

In LAB1 we already created a function to get the binary values of the integer we received by the line sensor. However, the function would give us an integer again with all the bits in a single number. This was not a very

useful implementation. We needed to get the bits in an array. We define an empty array in the callback function (Code 18) and give the pointer to the findBinary function. The basic decimal to binary converter in form of a while function would then store every bit in this array, Code 17.

Listing 17: converts integer to a binary array

---

```

1 void findBinary(int decimal, int * binary){
2     int i =0;
3     while(decimal > 0){
4         int rem = decimal % 2;
5         binary[i] = rem;
6         i++;
7         decimal = decimal / 2;
8     }
9 }
```

---

Listing 18: Top part of the timer callback function

---

```

1 void HAL_TIM_PeriodElapsedCallback(TIM_HandleTypeDef *htim)
2 {
3     /* Speed ctrl routine */
4     if(htim->Instance == TIM6) // check if interrupt came from timer
5     {
6         // get the line sensor data
7         status = HAL_I2C_Mem_Read(&hi2c1,
8                                 SX1509_I2C_ADDR1 << 1,
9                                 REG_DATA_B, 1,
10                                &lineData, 1,
11                                I2C_TIMEOUT);
12     int binary[8] = {0};
13     findBinary(lineData, binary); // converts int to binary array
```

---

The calc\_error\_line function shown in Code 19 does the calculation of the line error. The input of this function is an 8-dimensional array, containing the state of each infrared sensor coded in binary. A logical one means, that the corresponding sensor has detected a dark spot. In the for loop we iterate through every value in the binary[] array, ergo through all sensors data. We calculate the sum of the binary[] array to get the total number of triggered sensors. Furthermore, we are filling the distance\_from\_middle array with the opposing distance of every sensor from the middle. The distance between every sensor is 4mm. These values get negative to indicate a distance to the left and positive to indicate a distance to the right. The sum\_dist value is the sum of every distance from the center if the sensor was activated. Calculating the line\_error by dividing the sum of the distance of each activated sensor with the total number of activated sensors. This line\_error then represents the offset of the black line from the center, regardless of how wide the line is. Even if only one sensor is not activated, we still get a useful line error value.

Listing 19: Function to calculate the line error based on a binary array

---

```

1 int calc_error_line (int binary[]){
2     float distance_from_middle[8]={0};
3     float sum_dist = 0;
4     int sum_binary = 0;
5     for(int n=0;n<8;n++){
6         sum_binary += binary[n];
7         distance_from_middle[n]=((7.0/2.0)-n)*4;
8         sum_dist += binary[n]*distance_from_middle[n];
9     }
10    float line_error = sum_dist / sum_binary;
11    return line_error;
12 }
```

---

Listing 20: Conversion from line error to yaw error

---

```

1 float calc_yaw_error(float line_error){
2     float phi_err = line_error/85;
3     float yaw_err = phi_err * (165/2);
4     return yaw_err;
5 }

```

---

The `calc_yaw_error` function in Code 20 calculates a much stabler result for our error value. It includes the wheelbase dimension (D) and the distance between the line sensor and wheels (H). This determines the position of the turning point of the bot, which is between the two wheels, shown in Figure (23)

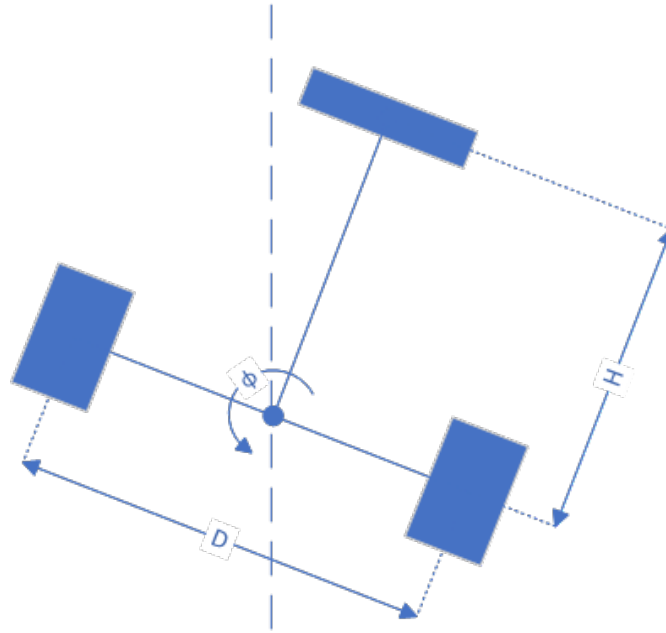


Figure 23: Schematic of the wheelbase and line sensor placement  
D=165 mm, H=85 mm

- **Calculating the reference for the motors:**

Based on the yaw error, we can now calculate our reference for the two motors. Since our motor controller is designed to compute rotations per minute, we set a base speed of 100 rpm and depending on the direction of the motor add or subtract our yaw error. To give the yaw error more effect on the base speed, we incorporated an additional gain. Testing different gains, we first found a relay able solution with a base speed of 100 rpm  $\pm$  yaw\_error \* 12. By Increasing the gain, we got better performance in sharper corners. The drawback was increased instability on the straight segments. Small changes in the yaw error multiplied with a high gain gave the bot a very shaky ride in straight segments. To furthermore improve the performance a linear or even an exponential gain was necessary. This would increase the impact of the yaw error in tighter corners and make sure to decrease the gain when the line is going straight. The robot would be very stable on straight lines and keep its agile performance in sharp corners. We tried implementing different if statements to check if the yaw error was in a certain range. Then we could set a different gain accordingly. This worked but needed a lot of tuning of all the values. In the end we saw that the values were basically the same as the yaw error itself. A very simple solution was to square the yaw error. This would increase the gain linearly. To keep the sign of the yaw error, the absolute value of the yaw error was multiplied by itself, see Code 21. For tuning this setup to use different base speeds it is possible to also add a gain to increase the impact of the squared yaw error.

Listing 21: Calculating the reference signals for the motors

---

```

1 reference_rpm_L = 100 - yaw_err*ABS(yaw_err); // workes great
2 reference_rpm_R = 100 + yaw_err*ABS(yaw_err);

```

---



The plot of Figure 24 shows the signals of the left and right motor. There is also shown the line and yaw error calculated from the data collected by the line sensor. The reference signal for each motor is then set by the functions shown in Code 21. It is clear to see that the encoder value of each motor is tracing the reference signal great. It is also clear to see the limitations of the motors. When the reference exceeds a given speed of around 150 rpm, the motors are limited by the duty cycle implemented in LAB 3. The solution for this would be to set a limit to the reference signal when calculated. Because of the geometry of the robot, calculating the yaw error results in a very similar value of the line error. This is because the ratio between wheelbase (D) to distance of line (H) sensor to wheels is almost one half, shown in Figure 23.

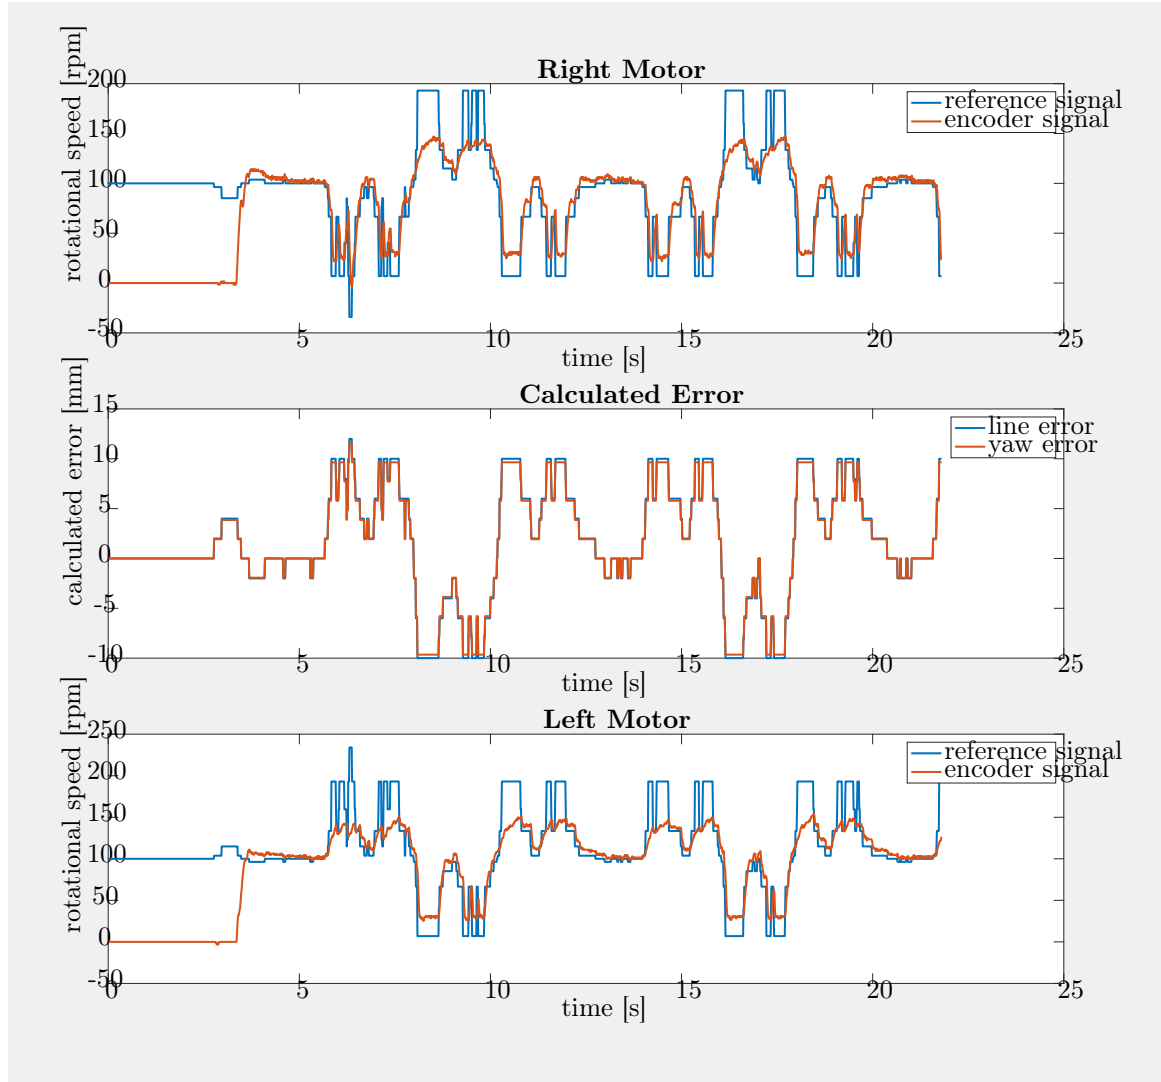


Figure 24: Motor Level Plot

## A Section in the Appendix

### A.1 Subsection in the Appendix

Additional relevant information...